
This is a reproduction of a library book that was digitized by Google as part of an ongoing effort to preserve the information in books and make it universally accessible.

GoogleTM books

<https://books.google.com>




LIGHTHOUSES



OF THE WORLD.



6000240840



A SUPPLEMENT,

CONTAINING THE

ADDITIONS and CHANGES in the LIGHTHOUSES to JUNE 1st,

1862,

will be forwarded free, by post, after that date, to the Holder's address, by inclosing
this slip, with a postage stamp, to the Publisher,

R. H. LAURIE, 53, FLEET STREET, LONDON, E.C.

A SUPPLEMENT,

CONTAINING THE

ADDITIONS and CHANGES in the LIGHTHOUSES to JUNE 1st,

1863,

will be forwarded free, by post, after that date, to the Holder's address, by inclosing
this slip, with a postage stamp, to the Publisher,

R. H. LAURIE, 53, FLEET STREET, LONDON, E.C.

A SUPPLEMENT,

CONTAINING THE

ADDITIONS and CHANGES in the LIGHTHOUSES to JUNE 1st,

1864,

will be forwarded free, by post, after that date, to the Holder's address, by inclosing
this slip, with a postage stamp, to the Publisher,

R. H. LAURIE, 53, FLEET STREET, LONDON, E.C.

A SUPPLEMENT

TO THE HISTORY OF THE UNITED STATES

OF AMERICA, FROM 1783 TO 1800

1800

By J. C. CALHOUN, Esq. of South Carolina. Author of the "History of the United States, from 1783 to 1800."

NEW YORK: PUBLISHED BY J. C. CALHOUN, 1800.

THE HISTORY OF THE UNITED STATES

A SUPPLEMENT

TO THE HISTORY OF THE UNITED STATES

OF AMERICA, FROM 1783 TO 1800

1800

By J. C. CALHOUN, Esq. of South Carolina. Author of the "History of the United States, from 1783 to 1800."

NEW YORK: PUBLISHED BY J. C. CALHOUN, 1800.

A SUPPLEMENT

TO THE HISTORY OF THE UNITED STATES

OF AMERICA, FROM 1783 TO 1800

1800

By J. C. CALHOUN, Esq. of South Carolina. Author of the "History of the United States, from 1783 to 1800."

NEW YORK: PUBLISHED BY J. C. CALHOUN, 1800.

A
DESCRIPTION AND LIST
OF THE
LIGHTHOUSES
OF THE WORLD.

1861.



BY ALEXANDER G. FINDLAY,
Fellow of the Royal Geographical Society.

200. b. 145.

LONDON:
PRINTED BY AND FOR RICHARD HOLMES LAURIE,
53, FLEET STREET, E.C.
JULY, 1861.

231. e 47.



P R E F A C E.

THE Introductory portion of this Book is the substance of two Papers, by the Author, read before the Society of Arts on December 15, 1847, and March 3, 1858; which have been published in the Society's Transactions and Journal. It was thought, that by drawing the Sailor's attention to the methods by which the Lights are produced, it would be adding much to their utility, and prove interesting to many.

The varied features of the beautiful Systems in operation are necessarily, from the nature of this Work, very briefly adverted to; and many important topics have not been touched upon for the same reason. The excellent works of ROBERT, ALAN, and THOMAS STEVENSON, will furnish the reader with a fund of varied information, which will supply all deficiencies in this, should a further insight be desired.

Besides these works, and others of earlier date, quoted herein, the bulky Reports of the Select Committees of the House of Commons, of 1822, 1834, and 1845, and that of the Royal Commission published in the present year, if they have not advanced the subject of their inquiry, have collected and recorded a vast mass of detail bearing upon almost every relation of the Lighthouse System. Besides these, the Report of the United States' Lighthouse Board, in 1852, the works of Fresnel, and other Engineers of the French Commission, will give an excellent account of the condition and requirements of Lighthouses.

The lists of the Lights which follow have been re-arranged from those published by the Admiralty, which, under the careful superintendence of Commander EDWARD DUNSTERVILLE, R.N., have attained a completeness approaching perfection.

In order that this Work may preserve its utility for several years, by giving the latest information, a SUPPLEMENT, containing the additions and changes that have occurred during the previous year, will be annually forwarded on application as directed.

A. G. F.

London, July 1, 1861.

ADDENDA.

- Page 38—THE SMALLS. The new Lighthouse is now completed; shows a bright fixed light at 125 feet, from Aug. 1, 1861.
- Page 38—SKERRIES. A *red* ray from the Lighthouse is shown toward the Coal Rock, E. $\frac{1}{2}$ S.
- Page 41—LANDGUARD POINT. The light is now shown from a tower on the Point. June 10, 1861.
- Page 41—OUTER DOWSING. A Lightvessel, to show a quick revolving *red* light, will be moored at the west side about Oct. 1, 1861.
- Page 51—DUNDALK. The Beacons from the Bar to the Quay have been lighted since April 1, 1861.
- Page 52—LOUGH FOYLE. A *red* lantern light, at 130 feet, on the Warren Point below Green Castle.
- Page 81—CORUNA. The light on San Antonio Castle shown since May 15, 1861.
- Page 102—ALGOA BAY. A fixed light from a tower near the Donkin monument, Port Elizabeth, visible from N.W. to S.W.: the light for one point at each end of the arc will be *red*, the remaining six points white. June 1, 1861.
- Page 103—PERIM ISLAND. Light bright, revolving in 4 minutes, (fixed and flashing?) at 241 feet, visible 22 miles off. Shown since April 1, 1861.

CONTENTS.

	PAGE
Pharology; or, a Description of Lighthouses and their Illumination	1

CHAPTER I.

Early History of Lighthouses	1
------------------------------------	---

CHAPTER II.

Lighthouses and Lightvessels	2
------------------------------------	---

Cordouan Light, 2; Eddystone, Bell Rock, Skerryvore, Carlingford, and Héhaux de Bréhat Lighthouses, 3; Force of Waves, 4; Mitchell's Screw Pile Light-house, 4, 5; Iron Lighthouses, 6; Lightvessels, 7, 8; Beacons and Buoys, 8, 9.

CHAPTER III.

Lighthouse Illumination	9
-------------------------------	---

1. Lights. Wood and Coal Fires, 9; Argand and Fresnel's Lamps, 10; Oils, 10, 11; Drummond, or Lime Light, 11, 12; Bude, or Gurney Light, 12; Electric, or Magnetic Light, 12, 13.
 2. Catoptric, or Reflector System, 13; Early uses, 13; Principles of the Parabolic Curve, 13, 14; Earliest use, 15; Hutchinson's Reflectors, 15, 16; Teulère's and Smith's Reflectors, 16; Characteristics of Reflectors, 17; Lightvessel Apparatus, 18; Bordier Marcet Apparatus, 18.
 3. Dioptric or Lens System, 19; Rogers's, Buffon's, Sir D. Brewster's Lenses, 19; Fresnel's Invention, 19, 20; Construction of Polyzoal Lens, 20; Adaptation to Revolving Lights, 21; Fixed Lens Lights, 22; Totally reflecting Glass Zones, 23; Fixed and Flashing Lights described, 23; Example, 24.
 4. The Holophotal System, 25; Mr. T. Stevenson's Arrangements, 25, 26; Dimensions and Cost of Lenticular Apparatus, 26, 27.
-

CHAPTER IV.

General Remarks	27
-----------------------	----

Difference in appearance of Lens and Reflector Lights, 27; Harbour and Tide Lights, 28; Distance to which Lights are visible, 28; Colour of Lights, 28; Dipping Lights, 29; Masking of Lights, 29; Control, 29; The Trinity House, &c., 29, 30; Foreign management, 30, 31.

LIST OF LIGHTHOUSES.

	PAGE
Description of Tables	32
<i>England</i> , Thames Mouth, 33; South Coast, 34—36; West Coast, 37—40; East Coast, 41—43.	
<i>Scotland</i> , East Coast, 44, 45; Orkney and Shetland Isles, 46, 47; West Coast, 47—49.	
<i>Ireland</i> , South Coast, 50; East Coast, 51; North Coast, 52, 53.	
<i>Norway</i> , 54; West Coast, 54—56; White Sea, 54. Norway, South Coast, 56, 57; Cattegat, 58; Denmark, the Belts, 60.	
<i>Baltic Sea</i> , W. Shore, 61, 62; Gulf of Finland, 63, 64; Baltic South Shore, 65.	
<i>Denmark</i> , West Coast, 66; Hanover, Holland, &c., 67—69; Belgium, 70.	
<i>France</i> , North Coast, 71—75; West Coast, 76—79.	
<i>Spain</i> , North Coast, 80, 81; Portugal, 81, 82; Spain, South Coast, 82.	
<i>Mediterranean Sea</i> , Coast of Spain, 83—85; France, 85—87; Corsica, Sardinia, &c., 87; Italy, West Coast, 88—90; Sicily, &c., 91; Malta, &c., 92; Adriatic, West Shore, 92, 93; East Shore, 93, 94; Ionian Islands, 94; Archipelago, 95; Dardanelles, &c., 96, Bosphorus and Black Sea, 97, 98; Sea of Azoff, 98.	
<i>Syria</i> , Egypt, Tunis, 99; Algeria, 99, 100.	
<i>Africa</i> , West Coast, and Atlantic Isles, 101; Africa, South Coast, 102.	
<i>Indian Ocean</i> , Red Sea, and India, 103—105; Bay of Bengal, East Coast, 105, 106.	
<i>Straits of Malacca</i> , Sunda, &c., 106; China and Kamchatka, 107.	
<i>Australia</i> , West and South Coasts, 107; Victoria, 108, 109; New South Wales, 109, 110; New Zealand, 110.	
<i>British America</i> .—Newfoundland, 111; Gulf of St. Lawrence, 112; New Brunswick, and Nova Scotia, 113—116.	
<i>United States</i> .—Maine, 117, 118; New Hampshire, &c., 119; Massachusetts, 120, 121; Rhode Island, &c., 122; Connecticut, 123; New York, &c., 124; New Jersey, &c., 125; Virginia, &c., 126; Maryland, 127, 128; North and South Carolina, 128, 129; Georgia, 130; Florida, 130, 131; Alabama, &c., 132; Mississippi, &c., 133; Texas, 133, 134.	
<i>West Indies</i> .—The Bahamas, Cuba, &c., 135, 136; Caribbee Isles, 137; Coast of Tierra Firma and Mexico, 138.	
<i>South America</i> .—Brasil, Patagonia, Chile, Peru.	
<i>California</i> , British Columbia, Pacific Islands.	

PHAROLOGY;

OR,

A DESCRIPTION OF LIGHTHOUSES, AND THEIR ILLUMINATION.

CHAPTER I.

EARLY HISTORY OF LIGHTHOUSES.

To bring before the sailor's notice the many beautiful adaptations of refined science in operation in Lighthouses,—to explain their principles, and to enable him to distinguish one description of light from another, through a knowledge of its construction, is the object of the present Introduction. These subjects, though of great interest, were but little noticed till within a few years, although they have been brought nearly to the present perfection for a long period.

Amid the wonderful progress which has characterized the last quarter of a century the Lighthouse system has been one of the foremost. Wherever civilization and commerce have spread, there has the engineer marked its advance by these evidences of his skill; and it seems more than probable, that in the course of a very few years all the prominent points of the world interesting to the navigator, wherever his commercial pursuits lead him, will be indicated by day and night by these guardian monitors; while the whole west of Europe is now so well lighted as to very nearly approach perfection. Whether Lighthouses, as now understood, were used in the early periods of history is almost more than doubtful, although there are many allusions in the mystical writings of the ancients to such existing, and conjectures have been formed that Homer has mentioned them. Vague hypothesis has also made the single-eyed Cyclopes into Lighthouses; or even, in a figurative manner, Lighthouses themselves. It is more than probable that the prominent headlands of the Mediterranean were marked, in the very early ages, by beacon lights, to guide the coasting and timid voyagers of these distant ages. It has also been surmised, but without much reason, that the famous Colossus of Rhodes, erected about 300 B.C., was also used as a signal light.

Leaving these dark conjectures, we arrive at a certainty in the history of the famous Pharos of Alexandria, one of the seven wonders of the world. It served as a guide to the ancient mariners during the period of 1,600 years, and its remains are still to be recognized. Pliny says, in his Natural History, that it was built by Sostratus of Cnidus, by command of one of the Ptolemies, about 285 B.C. The cost of it was 800 talents (£243 15s.), or £195,000 English. It was square, of white stone, consisting of many storeys, and diminishing upwards. Its height, according to the authority of the *Geographia Nubiensis*, was 100 statures of man, or 300 cubits, (equal 20·480 inches,) equal to 512 English feet. In the upper chambers were windows looking seawards, and in these chambers torches or fires were burned to guide vessels into the harbour of Alexandria, and we are told by Josephus that these fires were visible at the distance of 300 stadia (or 29½ geographic miles).

This general description is applicable to nearly all Lighthouses down to the year 1811 or 1812. Its name was taken from the little Island of Pharos, on which it was erected, and hence it has been applied to Lighthouses generally, while the term Pharology was first introduced by the late Mr. Purdy to express our modern system.

Other Light-towers existed at Ostia, Ravenna, Apamea, and other places, as mentioned by Pliny, Suetonius, and Stephanus Byzantinus.

During the spread of the Roman power, this mighty nation planted these evidences of their nautical skill in their conquered countries. The Lighthouse at Coruña, north-west of Spain, is perhaps the oldest existing town now used as such. It is believed to have been erected in the reign of Trajan. It was re-established as a Lighthouse in 1634, and in 1847 had one of the finest modern light apparatus erected in it.

In England we have an evidence of the Roman colonization in the Pharos which stands adjoining the ancient church on the highest part of Dover Castle, built prior to A.D. 53. A similar tower, now destroyed, existed on the opposite heights, and was called, from its hardness, "The Devil's Drop of Mortar;" another occupied the height of Boulogne on the French side. There perhaps may have been a Roman pharos on Flamborough Head, and another one on the coast of Flintshire. The known existence of these and others, and the inferred use of others in our own country, testify that these phari were among the many marks of the high civilization of those early days.

In the mediæval period, there are many Lighthouses of which we have some notices, as well as some which still are used as such. They were also frequently, perhaps more generally, a portion of other buildings. Thus, on an angle of the tower of the little church which crowns St. Michael's Mount, in Cornwall, are the remains of a stone lantern, perhaps nearly 500 years old, which is now known as the famous St. Michael's Chair. The Light at St. Elmo's Castle, Malta, has been shown since 1551. The Skaw Lighthouse, on the N. point of Denmark, recently rebuilt, dates from 1564. The oldest Lights now existing on the same sites in Great Britain, are those of Lowestoft, since 1609; Winterton and Dungeness, 1615; the North and South Forelands and Orfordness, 1634; the Isle of May, 1635; Portland, Harwich, St. Agnes, Flamboro', &c., all in the 17th century, and several others soon after these dates.

All these structures, however, do not differ in their principles from ordinary buildings on land, and were constructed only to show by night the uncertain illumination of a wood or coal fire, or other imperfect mode of lighting. Modern science has replaced all these methods by a very different order of building and apparatus; so that, although the brief description of lights in ancient times given above is interesting to the historian, it is only within almost the last century that the true requirements of these monitors have been recognized. As a building, the first structure, as a purely nautical work, was the Cordouan Tower, in the Bay of Biscay; and the next the Eddystone Lighthouse: with these commences the history of Modern Lighthouses.

CHAPTER II.

LIGHTHOUSES AND LIGHTVESSELS.

The famous Cordouan Tower at the mouth of the Gironde, in the Bay of Biscay, is a wonderful monument of skill. This elegant structure, the work of Louis de Foix, was completed in 1611, in the reign of the great Henri the Fourth of France, and was twenty-six years in building. It is minutely described by Belidor in his "*Architecture Hydraulique*." It was 197 feet high, and consisted of successive galleries, enriched with pilasters and friezes. Round the base is a circular building 134 feet in diameter, in which are the light-keepers' apartments, and which also forms a sort of outwork to break the force of the waves from the main building. The tower itself contains a chapel and numerous apartments, and is ascended by a spiral staircase. It has been lately modified and adapted to the modern system of lighting, and, after a lapse of 250 years, it is considered the finest Lighthouse in the world.

The Eddystone Rock, off Plymouth, has attracted the attention of the public more, perhaps, than any other of our Lighthouse sites; not so much on account of its importance, but as forming an era in the construction of Lighthouses. The first Eddystone Lighthouse was built of wood, 80 feet high to the top of the vane, from Mr. Winstanley's designs, 1696-8. The light was first shown in November in the latter year, but it was soon found that the sea rose, so as "to bury the lantern under the water," although at the elevation of 60 feet above the rock. It was accordingly raised to 100 feet. In November, 1703, the tower requiring some repairs, Mr. Winstanley went to the Lighthouse to superintend them; but the storm on the 26th of that month carried away the whole erection, and every soul perished. The wreck of the *Winchelsea*, man-of-war, soon after occurred, as if to point out the necessity of a light; but the Trinity House could not obtain the sanction of the Government to commence until July, 1706, when a new timber erection was begun by Mr. John Rudyard. It was subsequently destroyed by fire in 1755. This tower was circular, and 92 feet in height. The tower which exists here at present was erected by Mr. Smeaton, who has given an admirable description of it. The masonry was 76 feet 6 inches, and the top of the lantern 93 feet above the foundation. This noble erection, completed in 1759, stands a monument of fame to its constructor, and a lasting evidence of the correctness of the principles on which it is built. It will be self-evident, that the site of this, and similar erections, calls for extraordinary skill and solidity in their construction. They are therefore to be viewed as works *sui generis*, and must not be classed with similar buildings on land, removed from the tremendous force of the waves.

Smeaton's description has been so often referred to, that it is scarcely necessary to quote from it here. The various courses are so dovetailed into each other, and the whole secured together, that the tower is really almost as if cut out of a solid block. The immense difficulties which had to be overcome, from the first landing on the rock, on April 5, 1756, to the laying of the first stone, June 12, 1757, and the last, on August 24, 1759, render Smeaton's book one of the most interesting ever written.

The next Lighthouse in our country, of a similar nature, is the equally famous Bell Rock Lighthouse; whose constructor, the late Mr. Robert Stevenson, has also given us a most valuable account of the difficulties to be overcome, and the progress of the works, between its commencement, in August, 1807, and its completion, in October, 1810. It was first illuminated in February, 1811. The tower is 100 feet high, and cost £60,000.

A later, and the most noble erection of this kind, is that on the Skerryvore Rock, off the west coast of Scotland. This, from the designs of Mr. Alan Stevenson, the son of the engineer of the Bell Rock, and the talented engineer to the Scottish Lighthouse Board, cost in its erection, with the harbour for the tender and other necessaries, £87,000, and was first illuminated in 1844. The light is 150 feet above the sea, and the structure and its appliances exhibit every refinement that has hitherto been made in the varied particulars of the system.

The latest grand Lighthouse of this nature, and also one of the most important in the British list, is that on the Bishop Rock off Scilly, built by Mr. James Walker, 145 feet high, under the superintendence of Mr. H. Douglass, at an expense of £36,500.

The Lighthouse at Carlingford, on the East coast of Ireland, the foundation of which is 12 feet below high water, is an analogous structure, 111 feet in height, though not in such an exposed situation, was completed from the designs of Mr. George Halpin, in 1830.

Another noble and ornamental Lighthouse is on the West coast of France, on the Héhaux (or Héaux) de Brehat. It is nearly as high as the Skerryvore, and is deserving of all admiration. Its base is circular, 60 feet in diameter, from whence

the tower rises to the height of 140 feet. It is beautifully fitted up in many respects.*

It is as difficult to estimate the nautical importance of these triumphs of engineering skill, as it is to calculate the wonderful force of waves that they have to bear against.

Mr. Thomas Stevenson, another of that eminent family of Lighthouse engineers, constructed an apparatus, like a railway buffer, that self-registered the force of the waves that struck it, which has been applied to this purpose.

In the Atlantic, according to observations made at the Skerryvore Rocks, the average result for five of the summer months, in 1843-4, was 611 lbs. per square foot. The average result for the six winter months of the same years was 2,086 lbs. per square foot, or three times as great as in the summer months. The greatest force registered was on the 29th March, 1845, during a westerly gale, when a pressure of 6,083 lbs. per square foot was exerted. The next highest was 5,323 lbs.

In the North Sea, at the Bell Rock Lighthouse, the greatest result obtained was 3,013 lbs. per square foot. This lesser force is to be attributed to the narrow space in which the waves have to travel in the North Sea, compared with the roll of the Atlantic. It must, however, be remarked, that it is almost impossible to receive the force unimpaired, as the waves are more or less broken by hidden rocks or shoal ground before they reach the instruments.


Even this tremendous force seems to be far less than that encountered at the Bishop Rock, probably the most exposed Lighthouse in the world. On January 30, 1860, a storm wave shook this tower, and tore away the bell, weighing 3 cwt., from its support at the top of the tower, more than 100 feet above the sea. Mr. Stevenson also has related some extraordinary circumstances of the force of waves at the Shetlands, which demonstrate that their power, if opposed, is almost irresistible. Therefore, if these sea-beaten towers were not, at least, equal in weight to a solid block of granite of 60 or more feet in height, they would not be able to withstand the waves.

The most obvious means to avoid this enormous amount of hydrodynamic force, is to reduce the extent exposed to it to the smallest possible limits, so as to offer the least possible resistance. Iron columns have been suggested and used for this purpose. But here another difficulty awaits us, namely, that iron, particularly *cast iron*, is decomposed by the action of sea water, and this to a very great extent, the effect being to convert it into a substance similar in its chemical properties to black lead. In evidence of this, on removing the wreck of the *Mary Rose* at Spithead, which had been sunk for 292 years, the iron shot, upon being exposed to the air, gradually became red hot and then fell into a dry powder resembling burnt clay. This is a serious obstacle to the permanency of such erections, and it has been proposed by Mr. Gordon to obviate it by using gun metal or bronze; but whether this would answer for piles is a question. Wood has also been used, as in the *Small's Lighthouse* off Pembrokeshire; but as it is liable to many sources of decay, and particularly to the ravages of the *teredo navalis*, when under water, it is not adapted for such structures.

Having stated these difficulties, the description of the means employed to overcome them will be better understood. The first to be noticed is the *screw pile* of Mr. Alexander Mitchell, C.E., of Belfast. This principle was first employed in the construction of the foundation of the *Maplin Lighthouse*, on the north side of the mouth of the Thames, which now exhibits a red light. This was commenced in 1838, and is as firm now as when first erected. It stands on the outer edge of the *Maplin Sand*, which consists of sand at the surface, and afterwards of sand and mud, exceedingly soft and penetrable, and therefore the erection of a Lighthouse upon such a foundation must be considered as a great achievement.

* See "Rambles of a Naturalist;" by A. de Quatrefages. Translated by E. C. Otte, 1857; vol. i. p. 121.


The principle of the screw-pile Lighthouse, is having a series of piles, nine in number, eight in the angles of an octagon, and one in the centre. These piles consist of a shaft of hammered iron, 5 or 6 inches in diameter, having a single turn of the flange of a screw 4 feet in diameter. This pile is screwed with great facility into the sand to the depth of 22 feet, and it was calculated that each of them would bear a weight of 64 tons. These nine piles were fixed in nine consecutive days in the summer of 1838, and upon this foundation of Mr. Mitchell's, the light-room was erected under the direction of Mr. Walker, the engineer to the Trinity Board.



Extremity of Mr. Alex. Mitchell's Screw Pile.

Mr. Robert Stevenson proposed, in 1800, a structure similar to this, for the Bell Rock Lighthouse. It was intended to affix the foundation to the rocks, and that the iron shafts should support several storeys; whereas the Maplin and the Foot of Wyre Lights have but a single storey.

Mr. Mitchell previously completed a Lighthouse upon a similar foundation at the mouth of the Wyre River, in Morecambe Bay, about 30 miles north of Liverpool. It was commenced in November, 1839, and lighted in June, 1840. The foundation is formed of seven screw piles, six in a circle and one in the centre, each of them 5 inches in diameter, with a screw of 3 feet diameter, and these screws sunk 13 feet into the bank of exceedingly hard sand, which is occasionally dry at low water. On these screws is supported the Lighthouse, consisting of a floor, and the lantern above it.

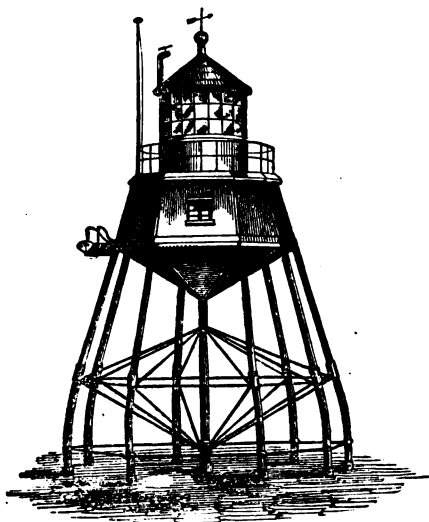

The Maplin Lighthouse, erected by Mr. Walker, upon Mitchell's screw-pile foundation.

Morecambe Bay, Belfast, Cork, &c., and have answered all their requirements. The proposal of Mr. Stevenson for the Bell Rock, above alluded to, was attempted on the Bishop Rock, and the structure was completed to the base of the lantern, when it disappeared in the course of a stormy night in January, 1850. The same disaster befel a similar structure on the Minot's Ledge, Boston Bay, U.S. These misfortunes have stopped any further extension of this principle, although it is of very great importance to secure a foundation on a treacherous bed in an exposed situation.

Many other plans have been suggested, among which the pneumatic pile of Dr. Potts deserves notice.

This screw-pile system has also been adopted for standing Beacons.

As far as experience goes, these Lighthouses answer all the purposes required of them, as regards stability, by offering the smallest possible surface to the force of the waves. How far the perishable nature of the iron may interfere with its permanency, must be left to time to unfold.

These pile Lighthouses have hitherto been placed in the less exposed situations, such as the Thames Mouth,

This beautiful adaptation of atmospheric pressure has been applied to the erection of several Beacons in the vicinity of the mouth of the Thames. The first experiment was upon the Goodwin Sands, on July 16, 1845, and an iron tube of 2 feet 6 inches diameter was driven into the sand to a depth of 22 feet in two or three hours. A gentleman, present at the experiment, which was made by the Trinity Brethren, said, that the facility with which this large tube was made to descend could be compared to nothing better than shutting up a telescope. The method of operation is this:—One of the tubes being placed perpendicularly, an air-tight cap is fixed to the upper end. The cap communicates with a powerful air-pump, by means of which the air is exhausted from the tube, drawing up the sand or shingle with the water which ascends, and the tube immediately descends from the effects of outward atmospheric pressure. The contents of the tube are then removed by the pump, which readily draws away the sand or shingle with the water which rises during their action, and the exhausting process is then continued. The upper end of the tube having become level with the surface, the operation is stopped, the cap removed, a fresh tube is affixed and secured, and the same course pursued, and thus continued, until, with the greatest facility, this great length of tube penetrated what must have been exceedingly hard sand, nearly resembling stone, as was found by Mr. Bush in his erection of a caisson on these sands, for his light of all nations. The practicability of the scheme being proved, several Beacons, as before stated, were erected as on the Buxey, the Shingles, the Girdler, the Margate, and other sands lying in the mouth of the Thames.

Another plan has been carried into effect, at the Point of Air Lighthouse, at the entrance of the River Dee, near Chester. This, which is similar in superstructure to the Maplin Lighthouse, is by Messrs. Walker and Burges, and consists of nine hollow iron cylinders, 3 feet 9 inches in diameter, sunk 12 feet into the sand by the aid of an instrument known to well sinkers as “the Miser,” which extracts the sand contained in the cylinder. In these the bases of the piles are inserted, and then filled with concrete. But this is erected above low water mark.

Another adaptation of iron to the construction of Lighthouses has met with far greater success, and promises to be of the greatest utility, whether as regards economy or facility of construction. This is the iron Lighthouse designed by Mr. Gordon. It would seem somewhat singular that iron should not have been employed in this form before, when we consider the multifarious variety of purposes to which it is now applied.

A cast-iron Lighthouse was mentioned by Mr. Rennie, in 1805, for the Bell Rock, and also, as previously stated, referring to Mitchell's screw piles, by Robert Stephenson, in 1800. Mr. Rennie, in alluding to the use of iron, says, “A Lighthouse of cast-iron might also be constructed here, and I will allow that it might have a coating of lead, or other metallic substance, so as for a long time, at least, to resist the effects of marine acid. But to make a Lighthouse that would last of such materials, would be nearly, if not wholly, as expensive as one of stone; while—I believe I need scarcely say—no human ingenuity could render it as durable.” But Mr. Gordon has proved the futility of this latter assertion, in some experiments he has made. The first tower of this construction was placed on the eastern end of Jamaica, called Morant Point.

This noble tower is erected on the centre of the remarkable group of islands, the scene of Shakespere's *Tempest*, and the focus of the Atlantic hurricanes. The Light-tower is 105 feet 9 inches high, formed with iron plates, the entire weight of which is nearly 100 tons. It has seven storeys, and the lower portion is filled in with concrete, to the height of 22 feet, to give it stability. Nearly every portion of the edifice is of iron, and the erection of the tower was completed in ten months, finished October 9, 1845. The light is from a beautiful dioptric first order apparatus, constructed by Messrs. Wilkins and Son, of Long Acre; the lenses composing it were made by Mr. H. Lepaute, of Paris, and is one of the most efficient and powerful lights in the world.

One important point is the colour of Lighthouses. In many instances this has not been sufficiently attended to; and some of the noble Scotch towers, left of the natural colour of the stone, too much resemble the grey background. When it shows against

the land, white, of course, is the best; and if against the sky, a dark colour is preferable. *Red* is sometimes used, as at Dungeness, &c.; and the extension of the use of coloured stripes and bands is recommended. This has been found particularly serviceable for day distinction in the British American lights, where the snow lies much longer against the field fences at right angles to the coast, and has precisely the same appearance at a distance as a white tower.

There is one difficulty in the use of coloured bands, and that is, during hazy weather, the appearance of the tower is frequently that of a ship under sail, the bright stripes being like the sails; this requires caution. The famous Eddystone has lately been painted in this way to distinguish it from the Bishop Rock.

The buildings we have been describing, commencing with those of ordinary land erections and terminating with such towers as the Bishop Rock, have been extended as far as human skill and power can probably be exercised. Still it is necessary, not only to mark a danger, or indicate safety, but to warn ships from the approach to a shoal or reef, or to show a channel far away from land.

The numerous light-ships which have been established by Great Britain have greatly fulfilled this requirement. Our country possesses 47 such vessels, of which 5 belong to Ireland and one to Scotland. Other countries have but very few light-ships, except the United States, which has 48; but they have only recently been made worthy of comparison with the English light-ships.

It is manifest that a lightvessel can perform its office but imperfectly compared with the stability ensured in a fixed Lighthouse. Its floating character prevents the use of that refined and enlarged apparatus which is the characteristic of a Shore Lighthouse. In addition to this, the establishment of a lightvessel is very much more expensive. The average cost of the English Lightships is £3,600; of the Irish, 6,200. Those of the United States (the best), the Nantucket New South Shoals, £4,375.

The cost of maintenance is much greater than that of a Lighthouse establishment. This is manifest from the difference of condition. Three men are sufficient to a rock Lighthouse, 11 are required to man a Lightship; consequently, while the annual cost of a first-class Lighthouse is from £265 to £340; in Scotland, £380; Ireland, £405 to £485; and in France, from £320 to £415; that of the Lightships amounts to £1,103, £1,464, and £1,320 per annum for England, Liverpool, and Ireland, respectively, and £1,354 for the United States' Nantucket vessel. These are strong arguments in favour of stationary buildings.

The question of their sufficiency depends also in some measure on the solution of a problem, which Mr. Herbert, of the Trinity House, proposes to make the subject of experiments on a large scale.

It has been proposed by him to extend the principle of lighting by establishing Floating Lights in the Fairway; the hulls to be constructed on the principle of his buoys, and the light the best known.

The efficiency of a Floating Light depends on the attention paid to the points in reference to the quality of Lighthouses, with one very important addition, namely, that it should remain on its station in all weathers.

"The best proof that the lights are efficient in the last particular is to be found in the statements of the Lighthouse authorities, which are fully confirmed by the evidence of mariners. The Lightvessels very seldom go adrift, and there is no instance on record in which the crew have voluntarily run from their stations in bad weather. When they have been driven from their moorings, the vessels have always been replaced in a very short time, and none have ever been wrecked. The mariners' evidence on this point is valuable, because the rare instances in which Lightvessels have been off their stations are repeatedly mentioned by independent witnesses as remarkable events. It does not appear that the lights have ever been accidentally extinguished."*

* Report of the Royal Commission, March, 1861, p. 17.

Much has to be learned about the best form for resisting the force of winds and waves when the vessel is always at anchor. The shape of the hull now varies considerably. Some are longer than others. The part of the vessel to which the moorings are attached, and the points where the chains enter, are different. The Irish vessels are generally longer and sharper than those in England, and set an after-sail when its use enables them to ride more easily. The testimony of the men on board has been in favour of considerable length, fine entrance, and a low point for attaching the moorings.

The Trinity House Lightvessels are painted red. In Ireland they are black with a white streak. At Liverpool, two are red and one black; and they are all distinguished by balls hoisted at the mastheads, and by other signals, and some have their names painted on their sides. Black and red seem to be the colours which contrast best with the colour of the sea, and they are, in fact, best seen.

The United States sea Lightships, where they have been constructed on the improved models of the European floats, since the establishment of the Lighthouse Board in 1852, are painted either cream-colour or white.

It is a remarkable fact, that the Lightships lying in very exposed situations, as that at the Seven Stones, near Scilly, and the Coningbeg, ride very much easier than those in shallow though sheltered waters, as at the Spurn, off the Humber; the Owers; the Cattegat, or the Arklow. This is owing to the great scope of heavy cable which is out in the one case, acting as preventive to her pitching heavily while she crosses the sea; and short cable renders a Lightship, in some positions, one of the most unpleasant situations in the world. In the shoal water, when the wind is strong, the vessels sometimes ride broadside to the tide and sea. Where the swell is much larger, as in the open ocean, the tides are not so strong. The efficiency of a Lightship is thus impaired by her want of stability. The remedy for this serious drawback involves the grand consideration, whether it is not possible to remodel the Lighthouse system, so to speak, by the establishment of deep sea Floating Lights, if a vessel can be constructed of such a form as to ride steadily and be secure at her moorings.

The proposal of Mr. George Herbert, above mentioned, for this important subject, is deserving of every consideration. In the case of the numerous buoys and beacons constructed and established on his principle, as shown in Liverpool Bay and elsewhere, it certainly does appear that the subject should not be relinquished till it is demonstrated that modern engineering skill cannot do in this what has been done in other apparently equal difficulties. Mr. Herbert's plan of the Beacon is that which keeps it constantly upright, with but little oscillation. His proposal is to moor a line of these large vessels along the fairway of the English and St. George's Channels, showing lights of the finest character at great elevations; so that by steamers passing up channel on one side and down on the other side, much of the risk of collision (that increasing and fatal evil) would be avoided, and the anxieties and dangers consequent upon hugging the land would also not be incurred.

A few words may be here added upon *Beacons* and *Buoys*, as accessories to our present subject. In some cases Beacons approach the excellence and costliness of standing Lighthouses. Thus the dangerous Wolf Rock and Rundlestone are marked with stone Beacons, the first of which cost nearly £12,000, and immense labour. There are 261 structures of some magnitude erected as Beacons under the public authorities of our country; and it is thought that our system, although capable of some improvement, is generally superior to that of foreign nations.

In the form and character of Buoys there has been very great improvement of late years, especially since the employment of iron in their construction, as in the case of ship-building. In Great Britain and Ireland, 1861, there were about 1,100 Buoys in position, excluding wreck, warping, and many others of minor importance; about one-half of which are under the public authorities. They generally keep their positions excellently, the chief accident occurring through being run down. Out of the whole number only 53 broke adrift in 1858, and of these a very large proportion were under local authorities. Mr. Herbert's Buoys, as before alluded to, answer their purpose admirably. Peacock's refuge Buoys are also excellent; and there are other

forms, as Lenox's and Poulter's, which are very efficient. The spiral form and dark colours (black or red) seem to be the most useful. The cost of a Buoy varies from £27 to £36 for the ordinary can, up to £130 and £197 for the first class spiral Buoys.

CHAPTER III.

LIGHTHOUSE ILLUMINATION.

1.—LIGHTS.

The first Lighthouses, such as the Cordouan and the North Foreland, had originally on their summit open fire-places, or chauffers; in that of the former were burnt billets of oak wood, and of the latter, coal; and this was the only means of indicating their situation during the night. A few words will show how incompletely these must have performed their office. Of course, the time at which a light becomes most serviceable is during tempestuous weather; and a wind, blowing towards the land, causes that dread to mariners—a lee-shore; yet this wind would drive the flames of an open fire away from the direction in which they were most wanted to be seen; thus the bars of the grate were often nearly melting to leeward, while towards the sea the coals remained untouched by fire. There was frequently, however, this advantage in the open fire, that during the fog or rain the glare of the fire was visible by reflection in the atmosphere, though the fire itself could not be seen. Such a feature would be of no advantage in the modern system, as will be hereafter shown.

The North Foreland Lighthouse, between Ramsgate and Margate, will be more familiar to many than other Lighthouses, and will serve as an excellent example of the progress of illumination. This Beacon was instituted for indicating the proximity of the Goodwin Sands. The first intimation we have of its existence is in 1636, in Charles the First's reign, when license was granted to Sir John Meldrum to renew and continue this and the South Foreland Lighthouse for the same purpose. At this time it was merely a large glass lantern on the top of a timber and plaister house, which was burnt in 1683. Towards the end of the same century, the present tower was partially erected; a strong octagonal structure, having the iron grate, or chauffer, for burning coals. From the difficulty of keeping up a proper flame in windy or rainy weather, about the year 1732, it was covered with a sort of lantern, with large sash windows, and the coal fire was kept alight by means of large bellows, which the attendants blew throughout the night. This was found not to answer, and the reflected glare above mentioned was thought desirable. Accordingly, the lantern was removed, and the fire restored to its original condition. Matters went on thus till 1790, when the tower was raised to its present height of 70 feet, and further improvements made in the lantern, by the introduction of lamps and other apparatus, hereafter to be described.

After some alterations of the Cordouan wood fire, the mariners complained that they could not see the light at the distance of two leagues as formerly. But Smeaton informs us, that the coal fire of the Spurn Point Lighthouse, at the mouth of the Humber, which was constructed on a good principle for burning, had been seen thirty miles off.

The only exceptions to the fires were the noble Eddystone lights, which then used to exhibit a chandelier of twenty-four wax candles, five of which weighed 2 lbs., and the Liverpool Lighthouses, which had oil lamps, with rude reflectors.

The use of coal fires has not been so long abolished as might be imagined. In Britain they were used till 1823. Thus the Isle of May Lighthouse, at the entrance

of the Frith of Forth, had a coal fire till 1810 ; at St. Bees Head, Cumberland, oil was first used in 1823 ; at the Flat Holm, Bristol Channel, in 1820, &c.

It is stated that a coal fire is still used on the Grönskär Lighthouse, East coast of Sweden. They were in operation on the two towers of Nidingen, in the Cattegat, till 1846.

The general use of *good* lights is of very recent date. During early times the modes of lighting were most imperfect, and the rude lamps, with their thick, torch-like wicks, which were the best then attainable, form a ridiculous contrast to the present universal brilliancy required.

Upon the introduction of the Argand lamp, a vast step was advanced towards the perfection of Lighthouses. This advance in artificial light was the greatest previous to the introduction of gas. It was discovered by M. Argand, a citizen of Geneva, about 1780 or 1785. It has remained as he left it, and appears as perfect in principle as can be looked for. Its perfection as an experiment was almost accidental. We are informed by the younger brother of Argand of its accidental discovery. He says, "My brother had long been trying to bring his lamp to bear. A broken-off neck of a flask was lying on the chimney-piece ; I happened to reach it over the table, and to place it over the circular flame of the lamp ; immediately it rose with brilliancy. My brother started from his seat in ecstasy, rushed upon me with a transport of joy, and embraced me with rapture." Thus was the Argand lamp formed.

On the introduction of a more efficient means of illumination, and the consequent abandonment of the coal fires, Lighthouses assumed a more important position in maritime affairs, and they were accordingly largely increased in number.

The cylindrical-wicked lamp, in its various forms, is the usual mode of lighting employed in Lighthouses. For the reflectors, the wick is nearly an inch in diameter ; for the lens lights, a more powerful and complicated lamp is used.

For a first-order light, this lamp consisted, in the first instance, of four concentric wicks, of the respective diameters of 0·827, 1·69, 2·52, and 3·39 inches, the smaller apparatus being constructed of 3 or 2 concentric wicks ; but within these last 10 years the interior wick has been removed from all the burners, it being thought that a light of superior brightness could be obtained by allowing more air to pass into the flame on the inside, and forcing this air outwards on to it by a metal breaker or button kept below the level of the flame, so as not to interfere with the rays of light emanating from all sides of it. But an undue economy has been forced on the consumption of oil, and the metal button hiding some of the upper rays, it is probable that the efficiency of the light has been impaired, and a portion of it screened from the upper part of the apparatus. The original form of the lamp will therefore be restored.

The oil is made to flow into the burners by various means, as is stated above. Fresnel's invention consisted of a series of four small pumps, worked by clock-work, which forced the oil upwards to the flames. Another mode was by weights acting on a piston ; a third by a spring doing the same office, a plan which has since become in universal use in the moderator lamps. Another mode, the pneumatic lamp of Messrs. Wilkins, acted by means of the pressure of air in the reservoir ; and another, frequently applied of late, is by placing the reservoir slightly higher than the lamp, the oil thus flowing freely by its own gravity to the required level.

The fuel used in the English Lighthouses in these excellent lamps up to the year 1846, was the best sperm oil that could be procured. At that period a change was made throughout the whole of the lamps, by adapting them to the use of colza or refined rape-seed oil, requiring a thicker wick. This oil was in use in the French Lighthouses for some time prior to this, and was procured from the seed of a peculiar species of wild cabbage, known in the north of France under the name of colzat, or colza. This plant is extensively cultivated in Normandy, &c., the chief markets for the oil being Caen, Rouen, Lille, and Courtrai. That now used by the Trinity House is chiefly refined by a patent process. This refined oil is of a superior character to the sperm oil ; it produces a brighter flame, does not cause so much deposition on the wick, consequently, will burn longer without trimming ; any adulteration in it is much more easily detected than in sperm oil, and it is half the cost. It is an

excellent substitute for the oil, which is annually becoming dearer, and more open to being mixed with other and inferior oils. In the Liverpool lights olive-oil has been used since 1847—a change effecting a saving of 40 per cent. on the use of sperm-oil. Olive-oil is also used in the Spanish and Austrian Lighthouses. The United States lights are supplied with sperm-oil exclusively. In our colonial Lighthouses other varieties of oil are used, of which one need only be noticed as being used in the Lighthouses near the Cape of Good Hope. This oil is procured from the tips of the tails of the Cape sheep, and is said to be far superior to any other oil for brilliancy of light; but the quantity consumed, and the expense, are great. It costs 10s. 6d. per gallon, and the first-order light of Cape Agulhas consumes about 730 gallons a-year; 482 gallons of rape-seed oil would be necessary for a year's supply.

One great advantage in the refined rape-seed oil is that it does not thicken, except upon a very great degree of cold, a qualification which places it far above sperm and many other oils for winter use. Indeed the change is a fortunate one in another respect. The untiring perseverance of the whale-fishers from the neighbourhood of Nantucket has so dispersed and destroyed their prey, that it is almost doubtful if a continuous and sufficient supply could be maintained, except at great prices.

The purity of the fuel, and the perfect combustion effected by the present arrangement of lamps, keep the flames used in the apparatus in their normal condition; but it is necessary to carry off the products of combustion from the confined space of the light-room, for, if they were not disposed of, they would both materially diminish the power of the light, and also be a serious detriment to the health of the attendant light-keeper, whose constant presence in the light-room is strictly required. This is effected by the ventilating tubes devised by Dr. Faraday, with the principles of which most are familiar; they are fitted to all our Lighthouses. A plan, similar in action, but less complete in detail, was promulgated at the commencement of the present century by Dr. Van Marum.

That a light of such intensity will be discovered as will penetrate a fog, may be considered as utterly hopeless. The sun, the great source of light itself, is entirely obscured by a comparatively thin film of vapour; and although we have artificial lights which apparently rival in brilliancy that of the sun, they are quite incapable of being seen to any great distance under such circumstances.

Perhaps it would be as well to notice here the very great distances to which lights have been visible. One of these is recorded in the account of the trigonometrical operations in France by MM. Biot and Arago. The points to be connected with Campvey, on the Island of Iviza, and a rocky mountain on the continent of Spain, called *Desierto de las Palmas*. On the former a powerful lamp with reflectors was placed. After watching for some months, a supposed minute star was identified as the signal light, and was afterwards easily recognized by the observers. This was a distance of nearly 100 miles. It is not intended by this example to say that a light could become serviceable at such a distance, but that it is possible to cause a light to be seen so far.

All modifications of lamp light sink into utter insignificance when compared with some other lights, produced by chemical means, from which very great expectations were formed, but hitherto with very little prospect of successful introduction. The first we shall mention is the Drummond light, generally known as the oxyhydrous or lime light.

Lieut. Drummond, the first promulgator of this splendid light, was employed in the grand trigonometrical survey of England, in the course of which it became necessary to connect by observation Leith Hill, in Surrey, with Berkhamstead Tower in Hertfordshire, which were to be seen, but could not be distinguished from each other. The discovery arose from his consideration of Berzelius's experiments with the blow-pipe, as detailed in the "*Philosophical Transactions*," 1826—1831; and from the intense light produced in these, Lieut. Drummond was induced to try a jet of flame from the combined gases, oxygen and hydrogen, on a ball of lime. Many trials of its intensity were made, one of which was in the north of Ireland. A hill in Inishowen, called *Slievenaght*, was always enveloped in haze by day, and a Drummond light was placed on it. In the line between it and the observing station was a church

tower, much nearer to the latter, and on this an ordinary reflector was placed. The Drummond light, at the distance of 70 miles, was much more elevated than the other, which was 12 miles distant, and thus they appeared nearly on a level. When they were both seen, the Drummond light appeared to be much nearer and brighter than the lamp at 12 miles.

Its enormous power is evident from this, and it has been reckoned equal to 264 Argand lamps; and this is produced from a ball of lime $\frac{3}{8}$ of an inch in diameter, and the angle which this minute object would subtend at the distance of 70 miles is only $\frac{1}{5}$ -6th part of a second.

The difficulties of introducing this light, however desirable, appeared at first to be insuperable. The preservation of an equal intensity of flame is almost impossible from the rapid diminution of the lime ball by fusion and volatilization, and by its frequently cracking and breaking. It has also the most painful effect on the eyes of the attendants, and is most injurious to the sight.

The difficulties, however, of maintaining a steady light has been in part overcome, as an arrangement has been made by Mr. Renton which preserves the cylinder of lime from cracking, and then jets of the combined gases produce a most brilliant flame. It has not yet been tried to any great extent in Lighthouses.

A proposition for increasing the intensity of the flame of the oil lamp was made by Mr. Gurney, in 1835; this was to impinge upon the flame jets of oxygen gas. This, by increasing the combustion, certainly enhanced the effects of the flame, but it charred the wick; and in this case, as in the former, it would be difficult to apply it to Lighthouses, from their isolated position, and the difficulty and danger of producing and keeping the gas.

The method of illumination by gas has in some instances been successfully tried, as in the Lighthouse at Hartlepool. The burner here is that of Mr. M'Niel. Gas, as an illuminator for Lighthouses, was proposed, in 1823, by Signor Aldini, of Milan.

The splendid light obtained by electricity has long been a desideratum, and numerous trials and great skill has been employed in overcoming its difficulties. It was hoped that the apparatus of Messrs. Staite and Petrie (1848) would have been successful, but it was found to be uncertain. M. Dubosc has designed an excellent lamp, which is used in philosophical experiments; but it requires delicate management, and is very expensive. Mr. Harrison's plan has not come into use.

There are two great difficulties in solving the problem of a steady light from electricity. The first is, in maintaining an equable force from the producing elements, that is, the battery, which, of course, will gradually decline in power after a short time, and no means have, as yet, been devised for so thoroughly obviating this, as to keep up for so many hours as the light must be shown. The next is, at the outlet of this current; in preserving that exact distance between the two points of carbon, through which the arc passes, which maintains the light in its normal condition. These carbon points are usually formed of graphite, the substance which is found lining the inner surface of the old gas retorts. The rapid disintegration of the positive pole, the less diminution of the negative pole, and the irregularity of the consumption of both under the intense action, have baffled the ingenuity of almost all who have attempted to control them.

Professor T. H. Holmes has adopted another form of originating the current than has hitherto been tried—that of magneto-electricity. The whole apparatus and its results are an admirable exemplification of the correlation of the physical forces—an evidence that one power may be traced throughout a train of operations until it emanates in a totally different form. The apparatus consists of a series of very powerful permanent magnets, around the poles of which the helices are made to revolve by means of a steam-engine, and from the extent of the primary arrangement a most powerful magnetic current is produced, which, passing through the carbon pencils, shows that splendid light which entirely eclipses all other modes of illumination.

This beautiful adaptation was used for 6 months in the upper Lighthouse of the North Foreland, and was very successful. The light, which is not $\frac{1}{4}$ inch in diameter,

was shown to disadvantage in the great lens, which, being adapted for the great lamp, was not suitable for it, and appeared at a distance of a bluish colour, probably by contrast with the red or yellow flame of the adjoining oil lamps. It is to be tried at the Dungeness Lighthouse.

The totally distinct character and colour of the electric light, will at once distinguish it at any distance from that derived from any other source. Therefore, supposing that this illumination be adopted as an adjunct to that in present use, the stations in which it is applied will be distinguished from their neighbours without the chance of mistake, the fruitful source of accident from the present lights.

Lieut. Raper, in his admirable work, proposes another method of showing a light for sea purposes, that is, by illuminating the clouds and haze over the station by the electric light. It was also proposed by Sir Edward Belcher, in 1833. This shaft of luminosity might be inclined in various directions, or it might be made to revolve by proper optical arrangements, and this would give a great relief to the already exhausted resources for varying the appearances of lights; but there is one case which might render this system of no avail, and that is a perfectly pure atmosphere.

This brief exposition must suffice as to the source of light. The apparatus used to control or economise this light is of two characters, either by reflectors or lenses, the catoptric and dioptric systems.

2.—THE CATOPTRIC, OR REFLECTOR SYSTEM.

The effects of a light in giving out rays without any controlling apparatus, will be to fill a sphere whose radius is equal to the distance at which the light is visible. In the light shown from a Lighthouse, those beams which are thrown upwards or downwards beyond the reach of vision would be totally lost for practical utility; it becomes necessary, to economise the light, to deflect these rays and cause them to assume that direction only in which they would be required. For all practical purposes, at present, we may consider that those only which issue in an horizontal direction are effective, and our apparatus must be so ordered to answer the end of forming a *horizontal band or zone of light*.

To do this we have two alternatives, the one to *reflect* the errant rays into the proper direction, by means of mirrors of the requisite form; or to *deflect* them, by causing them to pass through some refracting medium for the same purpose; in other words, to apply *lenses* of a particular form *before* the light, or reflectors *behind* the light.


The first idea of economising light, by the means of reflectors, is met with in the history of the Cordouan light. M. Bitri, who remodelled the lantern in 1727, arranged it for burning pit coal, of which 225 lbs. (French) were ignited at once, and lasted the night. Above the fire, instead of having a hollow cupola, as it had previously been, or of being entirely open like other Lighthouses, the circle of the ceiling of the cupola was made the base of an inverted cone, whose apex projected downwards three feet; the whole surface of this was covered with tin plates. These becoming reflecting surfaces, served to increase the intensity of the light; but how they were kept free from tarnish, and the effects of the smoke, we are not informed. Here we have the first element of the reflector system, and it is virtually the principle of the present Bordier-Marcet apparatus. Such an arrangement would certainly answer its requirements as applied to a coal fire, and any improvement on it must be also made in conjunction with some better mode of producing a light.

As the Catoptric principle depends on the figure of the parabolic curve, we will first describe this curve.

The Parabola is a conic section, whose figure possessing certain properties, renders it available for the purposes of reflection, and the true formula for its construction, as applied to Lighthouse purposes, is given by Captain Joseph Huddart, F.R.S.

The form given to the Lighthouse reflector is generated by the revolution of this curve round its axis, producing a semblance to a portion of a sphere. Its properties will be better understood by the diagram. The line $P V G$ is such a parabolic curve,

and within it is a point, F , which is called the *focus*, which is the situation of the lamp in the reflector, of which this may be supposed to be a section. Now it is a fundamental law in optics, that the angle of incidence is equal to the angle of reflection, that is, the ray is thrown off a reflecting surface at the opposite angle to which it is received. The peculiarity of this curved line of the parabola is, that any line drawn from the focus, F , to the parabolic curve, as $F a$, makes

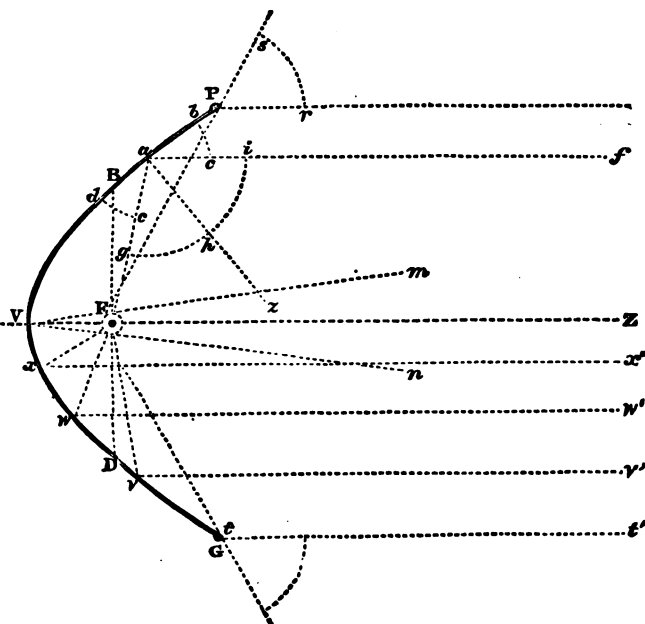

with the normals to the curve, as $a z$, angles equal to the inclination of these same normals respectively to lines drawn parallel to the axis, $V Z$. Thus a ray from the lamp, F , thrown on the surface of the reflector at a , will be reflected in the direction $a f$, which is parallel to the axis, $V Z$, and the angle of reflection, $b a c$, is equal to the angle of incidence, $d a e$; or, in other words, it makes with the normal, $a z$, the angle, $g a h$, equal to the adjacent angle, $h a i$. And this property belongs to every portion of the surface of the parabola, and consequently the rays will be represented by the lines $F x x'$, $F w w'$, &c. Thus it will be understood that this reflector must be most perfect in its action at that portion comprehended between the vertex, V , and the rectum or principal parameter, $B D$. For, as any deviation from the true figure will, of course, be doubled by the operation of the instrument, it will be readily seen that the acute angles made by incident rays, towards the mouth of the reflector, will be much more easily distorted by any defect, than when the angles are much more obtuse, and the reflection more direct, as they will be behind the parameter. This will show, as before, that the portion at the back of the light is the most effective of the parabolic reflector. There is some loss of light in the reflector, which will be more particularly adverted to presently.

Supposing it possible to produce a perfect reflector of the foregoing figure, and in its focus we were to place a point of light, it would send forth a cylinder of rays equal in diameter to its double ordinate, or the distance between G and P ; and if we had to construct a light apparatus which should exhibit a light in every direction in azimuth, or round the whole 360 degrees of the horizon, it is manifest that it would be impossible to do so with any number of such instruments: there would be dark intervals between the directions of their axes.


But here another circumstance awaits us. The flame of one inch in diameter, used

in illuminating such a reflector, supposing the focal length of the reflector to be four inches, will subtend an angle of $14^{\circ} 22'$ at the vertex of the parabola, or the angle $m V n$. Thus the reflected rays from the external edges of the flame will diverge from the axis to one-half such an angle on either side of it. This divergence decreases in those rays which strike the surface at greater distances from the vertex, but, combined with other circumstances, between 11° and 15° or 17° of divergence may be considered as effective from such an instrument. It would therefore take from 25 to 33 such reflectors to form a complete zone of light.

With respect to the invention of parabolic mirrors, we find them mentioned at a very early period, though not in connection with the subject of illumination, but in reference to their powers of focalising the rays of the sun to form burning instruments, an inverse principle of that of lamp reflectors. In a work entitled "*Pantometria*, by Leonhard Digges, published in London in 1571, the author states that "with a glasse framed by a revolution of a section parabolically, I have set fire to powder half a mile and more distant." In the prosecution of this subject, the celebrated Napier and Sir Isaac Newton experimented with parabolic reflectors before 1673. And the celebrated Buffon, with the same object, proposed the polyzonal lens, now modified for Lighthouse purposes, as will be mentioned hereafter.

The first parabolic reflectors for Lighthouses were used at Liverpool, probably in 1763, certainly previous to 1777, for in that year William Hutchinson, Dock Master of that place, published his "*Practical Seamanship*," and in that work he fully describes the apparatus used in the four Lighthouses built at Liverpool in 1763.*

The origin of their use is curious. It is said, that at a convivial meeting of some scientific men at Liverpool prior to this date, that one of the company wagered that he would read a newspaper at the distance of 200 feet by the light of a farthing candle. This he afterwards won by means of a wooden bowl, lined with putty, in

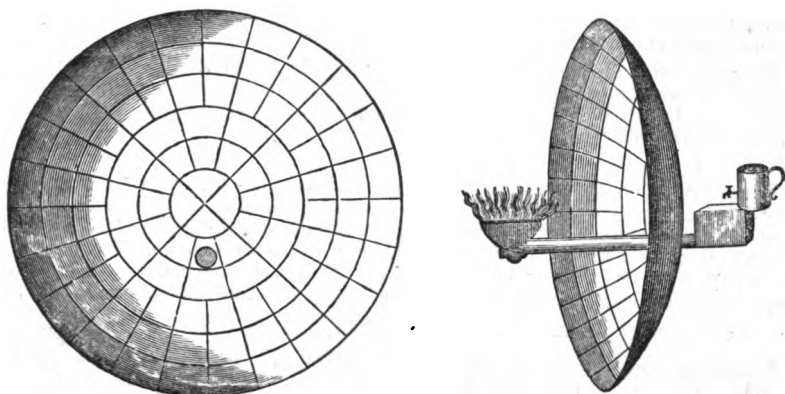

Parabolic Reflectors used in the Liverpool Lighthouses, erected in 1763; copied from a plate in Hutchinson's "*Practical Seamanship*," 1777, formed of wood and lined with pieces of looking-glass, or of plates of tin. The oil kept on a level with the flame by a dripping-pot, supplying the reservoir at the back.

* Lighthouses were not always looked upon as useful aids. The Mayor and Corporation of Liverpool wrote to Sir G. Ireland, their representative in Parliament, on January 5, 1670, to appear against *Reading's patent for Lighthouses*:—"In regard those Lighthouses will be no benefit to our Mariners, but a hurt, and Expose them to more danger if trust to them; and also be a very great and unnecessary burden and charge to them." See Transactions "*Historic Society of Lancashire and Cheshire*," vol. vi. pp. 16 and *24.

which facets of looking-glass were embedded, and formed a reflector. One of the company was William Hutchinson, who, seizing the idea, thus utilized it.

These reflectors were formed to a parabolic curve by a somewhat rude process, which he describes.

"We have had," says Mr. Hutchinson, "and used here in Liverpool, reflectors of 1, 2, and 3 feet focus, and 3, $5\frac{1}{2}$, $7\frac{1}{2}$, and 12 feet diameter. The smallest made of tin plates soldered together, and the largest of wood covered with plates of looking-glass, and a copper lamp, the cistern part for the oil and wick stands behind the reflector, so that nothing stands before the reflector to interrupt the blaze of the lamp acting upon it, but the tube that goes through with a spreading burner mouth-piece, to spread the blaze parallel thereto, and with the middle of it just in the focus or burning point of the reflector.

"The lamps are like the reflectors, proportional to make a greater or less blaze as required; their spreading burning parts are from 3 to 12 and 14 inches broad, and are trimmed every four hours.

"Thus are these Lighthouses constructed, kept, and situated, and have stood the test of a fair trial, and the preference and advantages given to them even by their opponents, as there always will be to new things commonly calling them new whims, till time and trial confirm them as useful improvements."

Thus writes Mr. Hutchinson, in 1777; and he also proposed other and more complete reflectors similar to those we now possess.

The reflectors now used in the Trinity House lights are constructed, as before mentioned, according to the formula proposed by Captain Joseph Huddart, F.R.S., an Elder Brother of the Trinity Corporation; and a man of whom England may be proud. These reflectors are hence known by the name of Huddart's reflectors, and, as far as their principle is concerned, they may be pronounced perfect. Their manufacture is conducted with every care; but, of course, it is *absolutely* impossible to produce a faultless instrument: but as they are made, they may be considered among the most perfect specimens of workmanship.

The proposition for parabolic reflectors was made by M. Teulère, of the French Royal Engineers, in a memoir dated June 26, 1783, as intended for the Cordouan Lighthouse, but they were in use in England many years previous to that period.* They were also constructed, by Lenoir, of silvered copper, under the direction of the Chevalier Borda, in 1780.

In the year 1786, reflectors and oil lamps were proposed at the first meeting of the Scottish Lighthouse Commissioners. The first metallic reflectors used in the Northern Lighthouses were constructed by Mr. Thomas Smith, of Edinburgh. The figure was given to them by a plaster mould, and the cavity was afterwards filled in, by means of cement, with small facets of mirror-glass. This must have done its work very imperfectly, although the general figure was capable of considerable accuracy. In

* In the admirable account of the Skerryvore Lighthouse, &c., by Alan Stevenson, Esq., p. 205, and in his "Rudimentary Treatise on Lighthouses," p. 73, the merit of the first application of reflectors is awarded to M. Teulère, as above. But the author quotes from a *second* (or Liverpool) edition of Hutchinson's work, in 1791. The *first* (or London edition), illustrated by the same plates, and containing much the same matter, was published in 1777, under the title of "A Treatise on Practical Seamanship," &c.; a different title to the second edition. It is beyond question that reflectors were in use in Liverpool before they were in the Cordouan.

Hutchinson closed a life of much usefulness and excellence in 1810. He was dock-master in or prior to 1759. In 1764 he commenced a valuable series of tide and meteorological observations, continued till August, 1793. In early life he was shipwrecked, and the crew being without food they drew lots to ascertain who should be put to death, to furnish a revolting and horrible meal to the survivors. The lot fell upon Hutchinson, but they were providentially saved by a ship which hove in sight. He ever afterwards observed this day as one of strict devotion. "Trans. Historical Society of Lancashire and Cheshire," vol. ix. pp. 240, 241.

1803, the first polished metal reflectors used in Scotland, were placed in Inch-Keith Lighthouse.

The reflector system has been called the English system, in contradistinction to the lens or French system. This is because we had numerous Lighthouses in which this fine apparatus had been perfected before the French, who were second in this field, had any systematic arrangement, which was indeed not until after 1825. In the early days of the present Lighthouses these reflectors were supposed to do their work so perfectly that but little could be gained by a change to the expensive and difficult system of lenses. Later inquiries have not entirely subverted this opinion.

"It has been generally assumed that the dioptric is preferable to the catoptric system; but while your Commissioners do not controvert this opinion, they have conclusive evidence that many of the catoptric lights in England are not only excellent in themselves, but *exceed* in efficiency the dioptric lights on its shores. The first part of Question 7, of Circular VIII., addressed to mariners, runs thus:—"What British light have you usually seen farthest off?" And out of the 579 witnesses who have answered this question, the greatest *distances* are mentioned with reference to the lights at Lundy Island, the Calf of Man, Tuskar, Flamborough Head, Beachy Head, and Cromer; and the greatest *numbers* of witnesses mention Flamborough Head, the Lizard, Lundy, Beachy Head, the Start, and the South Stack, all of which are catoptric revolving lights, with the exception of the Lizard, which is catoptric fixed, and the Lundy and Start, which are dioptric revolving."

The reflectors in use by the Trinity House are 21 inches in diameter for shore lights, and 4 inches of focal length, having a total reflecting surface of 518·6 square inches. They cost about £31 10s. The Scotch are of 24 inches aperture, and cost £43. Messrs. Wilkins are proposing them of 36 inches in diameter. They are most excellently made, and have lasted, unimpaired, 30 or 40 years.

The brilliancy of the ray from this reflector is considerably stronger in the direction of the axis, that is, when viewed directly in front, than it is for some distance on either side of that direction; and at great distances, in *fixed* lights, when you are in the direction *between* the axes of the adjoining reflectors, the light is frequently glimmering and feeble, but a small change in the position of the ship brings you again into the brighter beam of the reflector, one of which, it will be understood, is only in sight at a time. This is an important observation to the sailor, in distinguishing one fixed light from another, of different description of apparatus.

When a *revolving light* is required, a number of these reflectors are fixed to the sides of a triangular or quadrangular iron frame, and the whole caused to revolve in regular periods, by means of clockwork. The reflectors on each side of the revolving frame, from four to eight in number, are thus successively directed to every point of the horizon; and the combined result of their rays form a flash of greater or less duration, according to the rapidity of their revolution.


From the amount of divergence (13), the period during which such a light will remain visible is from 12 to 15 seconds, the light gradually increasing, and as gradually diminishing. And as the action of the reflector is only in the direction to which it is placed, the intervals between the flashes will be quite dark, for a shorter or longer period, according to the distance from which it is viewed, whether it is beyond that to which the unassisted flame will reach.

The light from a revolving catoptric or reflecting system is much brighter than from a fixed light on either principle, as you have the combined effect of several reflectors, each of which gives an equal amount of light, it is calculated, to 350 or 450 such lights without any reflectors.

In floating Lightvessels the light is always shown from parabolic reflectors. These are smaller than those used in Lighthouses, being 12 inches in diameter. For fixed lights, eight lamps and reflectors, each suspended on gimbals, or on ball and socket-joints, so that they always maintain their perpendicularity, notwithstanding the roll-

* Report of the Royal Commission, March, 1861, pp. 7, 8.

ing of the vessel, are arranged in an octagonal lantern, which goes round the mast, and is hauled up to the mast-head when on service, and is let down on the deck during the day, or while the lamps are trimming. Revolving lights for floating Lightvessels have four or eight lamps, and similar reflectors, and the lantern revolves around the mast. The adjoining diagram is a representation of one of Messrs. Wilkin's Revolving Light Lanterns. It is very similar to that of a fixed light, the clock-work moving it is placed between decks.

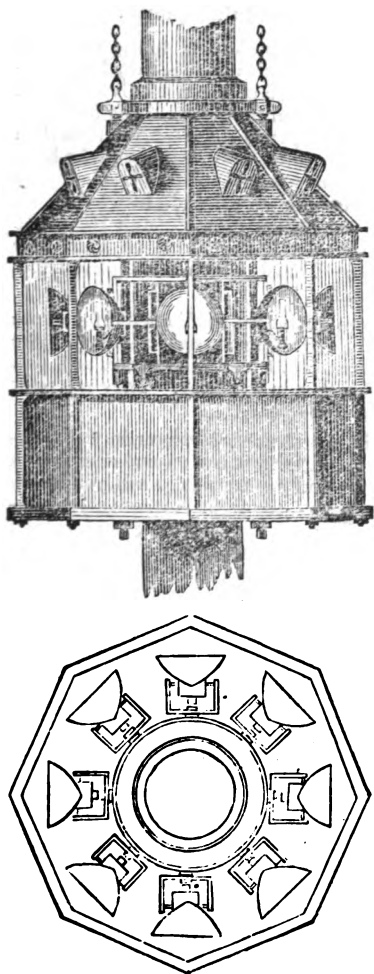

Only one English Lightvessel, that in the Tees, has a dioptric apparatus. Several of the Lightvessels are now made to show revolving *red* or bright lights where they were formerly fixed lights, as in the case of the Nore Lightship, it having been found that in many cases it was difficult to distinguish the fixed light of the Lightvessel from the mast-head lights of the ships at anchor near them.

The red revolving lights are now made very efficient. The red light is made by using a coloured chimney to the lamp; or, in some cases, a pane of red glass is placed upon the reflector. A green or blue light is sometimes used as a pier mark, or in other subordinate positions; but red is the only efficient colour. The French coloured lights are much paler than ours. The best red glass is coloured with chloride of gold, known in the middle ages as the purple of Cassius. It has only been rediscovered of late years. When the Bell Rock Lighthouse was completing, there was great difficulty in procuring the red panes for the coloured flash.

An apparatus for producing an *intermitting* light, of the only appearance to which such a term is applicable, is in use in three of the Scottish Lighthouses, the invention of Mr. Robert Stevenson. It is an arrangement by means of which the light is suddenly obscured by an eclipser, and as suddenly appears again at its full brilliancy. This feature distinguishes it completely from revolving lights, which come gradually to their greatest brightness, and as gradually decrease, and this either from the reflecting or refracting apparatus.

There is yet another sort of reflector in use in France for harbour lights, called the Bordier Marceat apparatus, from its inventor, or the sidereal lamp (*lanterne sidérale*). It is used with a single lamp, and consists of two circular reflectors about $13\frac{1}{4}$ inches diameter, whose figure is formed by the revolution of a

parabola around its focus in a horizontal plane; the centre of this is taken out to admit the lamp, which thus has all around it, above and below, a reflecting surface, which sends its upward and downward rays in a horizontal direction.

The lights in the ensuing list, which are upon the catoptric or reflecting system, are distinguished by this mark ●. Their magnitude, or order, is not indicated; the class of the light is to be inferred from its importance.

3.—THE DIOPTRIC OR LENS SYSTEM.

This system,—that in which the controlling apparatus is placed before the light,—is next to be considered.

There are several very early notices, which seem to shadow out this principle. One is given in Smeaton's account of the Eddystone, where a London optician proposed to grind the panes of the lantern to circular segments, so as to form a sphere of 15 feet in diameter. This was negatived, and we cannot learn what the particulars were, although an optician, it would be thought, would deal with refraction and economise the light.

The use of lenses in Lighthouses dates from early times. It is more than probable that Argand's invention soon directed attention to the best mode of concentrating the light. William Hutchinson relates an experiment tried at Liverpool with a hollow lens filled with brine, which, however, was broken by the heat of the lamp. It is certain that they were placed in one of the Portland Lighthouses between 1786 and 1790, by Thomas Rogers. These lenses were 21 inches in diameter, and $5\frac{1}{4}$ inches thick in the centre; the flame of the lamp was 3 inches in diameter; and behind it was placed a glass (spherical) reflector, 12 or 18 inches in diameter, and by a new method silvered over the convex side without quicksilver. These lenses were also adopted by Rogers in the Lighthouses at the Hill of Howth, and at Waterford. Similar, but smaller lenses, 16 or 18 inches in diameter, carefully worked, and which cost £50 each, were in use at the North Foreland. There were 15 of them placed there at the commencement of the present century by the Governors of Greenwich Hospital, where they remained till 1834, when the Trinity House replaced them by reflectors, which have again recently been removed for a beautiful new dioptric apparatus.

The lens apparatus now in use is peculiar. It is called, from its figure, the Annular or Polyzoal Lens.

The history of the polyzoal lens is simple. Like the parabolic reflector, it was originally designed for a burning instrument, by collecting the rays of the sun, and for no other purpose. For a very long period these instruments, of various forms, occupied a large share of the attention of the experimentalists of the last and preceding centuries. Modern progress has converted them into scientific toys.

The merit of the earliest suggestion is due to the celebrated Buffon, the French naturalist, who, in 1773, according to Condorcet, proposed, for a burning glass, to form it of three concentric circular pieces upon each other. If a lens were required of 24 inches in diameter, and 3 inches thick in the middle, then the central portion was to be of 8 inches diameter, and 1 inch thick, inserted into a circular zone; ground to the same focus, and 16 inches diameter; and this again into a similar zone of 24 inches. Buffon states that the rays would be twice as powerful passing through 1 inch, as they would through 3 inches thickness of glass.

The suggestion of Buffon was acted on by the Abbé Rochon, with some success, in 1780; but his operation consisted in grinding down a single piece of glass into concentric rings. A similar lens was made by Messrs. Cookson, of Newcastle-upon-Tyne, and tried by the Northern Lighthouse Board. This process is necessarily attended with an enormous amount of trouble and expense, and the result must be precarious.

The particulars of Buffon's invention appear in most of the English and Scotch Encyclopædias, published after 1796. In 1812 Sir David Brewster proposed a plan for a built lens in the Edinburgh Encyclopædia, vol. v. This was also intended for a burning instrument, and no mention is made at this time for its converse properties, that of distributing light, as adopted for Lighthouses. There is no need of controversy on this. Lighthouses, at this date, had not then attained the importance they now have; and the beautiful reflectors then in use, as in the Bell Rock, were considered to do their work perfectly. Besides this, the polyzoal lens is not adapted for *fixed lights*; the cylindric refractor for the purpose was not perfected till 1836.

It is to the late M. Augustin Fresnel that we owe the introduction of the lenticular system, and hence it is frequently called by his name. Its origin dates from


1819. During the progress of the great Trigonometrical Survey of France, under MM. Arago and Mathieu, powerful lights were used as signals; and one of these lenses, 3 feet in diameter, constructed by M. Soleil from the designs of Fresnel, was applied to a large lamp on Cape Grisnez, and other places, in the autumn of 1821. Major Colby, who was employed in the operations on our side, informed Mr. Robert Stevenson of the particulars, in Nov. 1821. On July 23, 1823, the splendid revolving apparatus of this system was first shown in the Cordouan Lighthouses.

In 1824, Mr. Robert Stevenson visited the French Lighthouses, &c., and reported on them to the Scottish Lighthouse Board. The first application of the system there was in the Isle of May Light, by Mr. Alan Stevenson, the talented son of the before-named eminent Lighthouse engineer, in October, 1825. Holland was the first to follow France in the use of the system. The Trinity House erected the first lenticular apparatus in the Start Lighthouse, 1836.

The Lighthouses of France were very few in number prior to Fresnel's invention; upon his success the French Government determined upon the establishment of the grand system adopted in 1825, and of the sole application of the lens in all cases of new lights. The case was different on our side. Many of the present lights existed long before the invention of Fresnel, and, having been erected as exigencies arose, there necessarily was not that exact order and regularity that might have been attained by a total change and remodelling at any period. That our system does not suffer by comparison with those of other countries, is a grand proof of the talent of our Trinity Board and other authorities, and of the skill of our engineers.

The lenticular apparatus may be thus described:—It consists of a central and powerful lamp, of course emitting luminous beams in every direction. Around this is placed an arrangement of glass, so formed as to *refract* these beams into parallel rays in the required directions.

The laws of refraction are well understood, and require but little explanation here. We shall just allude to it sufficiently to elucidate our subject. When a ray of light passes out of a rarer into a denser medium, or *vice versa*, it is refracted from its original direction, and assumes that which is induced principally by the density of the second medium. This is made familiar by the bent appearance of an oar, or a mooring when it dips beneath the water. The use of the glass lens is thus to bend the rays which fall on and emerge from its 2 surfaces. The action of the bull's-eyelantern, in sending forth the rays in one direction, will explain this principle. As the normal figure of the lens is that to which its powers are due, the polyzonal lens must be considered as such a complete lens with the unnecessary portions cut away.

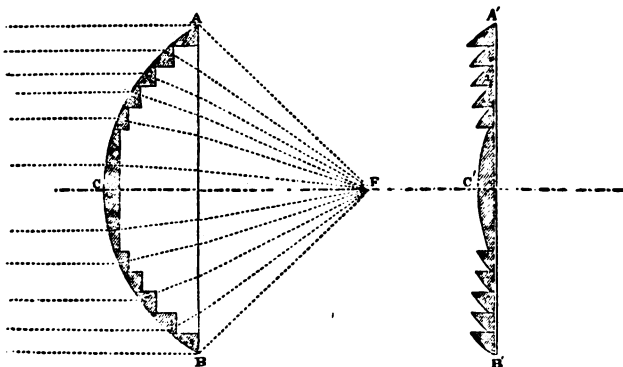


One great advantage in the decomposition of the original lens is that of diminishing its weight very considerably, and also the greater certainty of the more uniform density of the material from which it is made. There is also another

point in the construction: it affords the means for correcting the aberration for sphericity, a great point in the manufacture of lenses.

The principle of the polyzonal lens being thus explained, the method of applying these to control the luminous rays of a lamp is now to be shown. For this purpose they are built into a square figure, that is, for such lenses as are for revolving lights.

For a *revolving* light, eight of such lenses, which, for a light of the first order, have a focal length of 3 feet 0.25 inches, are formed into an octangular drum which surrounds the central lamp, placed in their common focus. This, then, is the principal portion of the controlling apparatus for a *revolving* light.

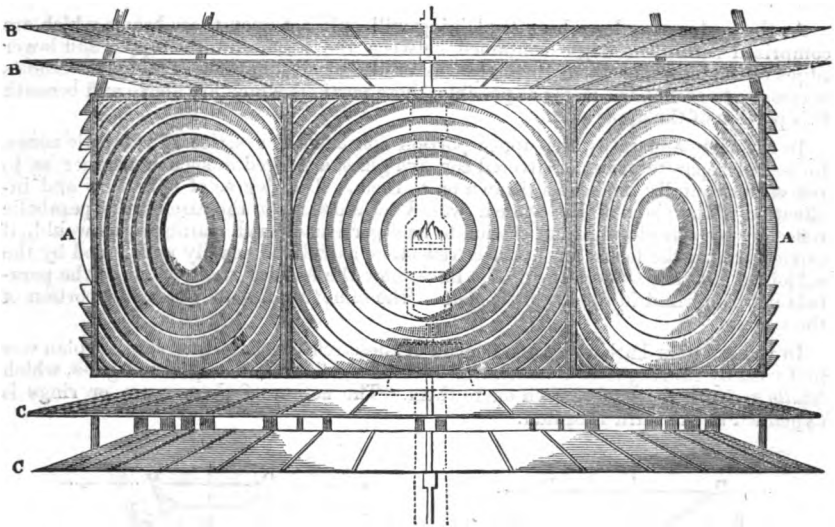

The central portion of a first order dioptric revolving light apparatus (the Bermuda light). A A represents the polyzonal lenses, of which there are eight, arranged around the central lamp. The diameter of the octangular prism formed by them is 6 ft. 0.5 in. B B are two of the eight upper series of reflecting zones. These are composed of separate silvered-glass mirrors, and each diminishing in diameter, forming a cupola rising to 5 ft. 6 in. above the flame. C C, two of the four lower series of zones, which are all of the same diameter. The action of these zones will be explained presently.

The lamp which this system is applied to, contains four concentric wicks, (of the respective diameters of .857, 1.69, 2.52, and 3.39 inches,) and the oil, by a peculiar construction, either by a mechanical contrivance of small pumps worked by clock-work, or of springs or weights, or else by the pressure of air upon the surface of the oil in the reservoir, is made to flow copiously over these wicks, otherwise the great heat evolved during its combustion would char the wicks. This lamp consumes a pint of sperm oil per hour; or, according to the computation of the French Commission des Phares, 570 gallons per year. This powerful apparatus being in the centre of the surrounding lenticular system, the ray impinging upon each lens is refracted into a series of parallel, or nearly parallel beams, whose section is the figure of the lens, in the case of the revolving light, or into a continuous zone or band of light around the horizon in the fixed light. M. A. Fresnel, in the construction of the Cordouan dioptric system, used a more complicated system than that above described. A similar arrangement also is in operation at the Skerryvore, and some other stations; and in these cases every available means is taken to economize the light.

For a *fixed* light, another adaptation of the principle is used. We must suppose


the section of the lens, A B (Diagram on p. 20), to revolve around the focal point, F, and in the same plane, which will produce a series of horizontal belts, having their vertical section similar to that of the lens in its circular form. The effect of this, applied to a central lamp, will be to produce a continuous belt of light in azimuth, instead of a series of beams parallel, or nearly parallel, to the axis of the circular lenses, as in the case of the revolving apparatus. In the focus of this belt, or drum of glass, is placed the lamp, as in the former case.

Originally this cylinder for a fixed light of the first order was made into a polygon of thirty-two sides; but in 1836, the Messrs. Cookson, of Newcastle-upon-Tyne, made one entire, which was the greatest step then achieved in the construction of these lenses.

As the systems we have been explaining will only act upon those beams which are comprized within the angle contained between the focus and the upper and lower edges of the lenses, or about three-eighths of the whole quantity of light, it becomes necessary to economize, as far as possible, those portions which are above and beneath this portion of the apparatus.


In the early apparatus, the upper portion consisted of a series of catoptric zones, formed of separate pieces of silvered concave glass, arranged in such a manner as to reflect horizontally the beams thrown on to them. The degree of curvature and inclination to the plane of the system was determined, as in the case of the parabolic reflector, by considering their section to be a portion of such parabolas as would, if carried around the focus, form perfect reflectors, as will be readily understood by the subjoined Diagram, where the dotted lines show the form of that portion of the parabola not comprized in the catoptric zone. The same applies to the lower portion of the system.

In the small, or harbour lights, instead of these reflecting mirrors, another plan was first used by M. Augustin Fresnel, that of catadioptric rings, composed of glass, which *totally reflected* the rays thrown on to them. The action of these zones or rings is explained in the third Diagram.



Catoptric Zones.

F, the focus of the system and the situation of the light; A A, principal lenses; B B, upper reflecting zones; C C, lower reflecting zones. The parabolic curves, of which the section of the zones is a portion, is continued round the focus in the dotted lines.

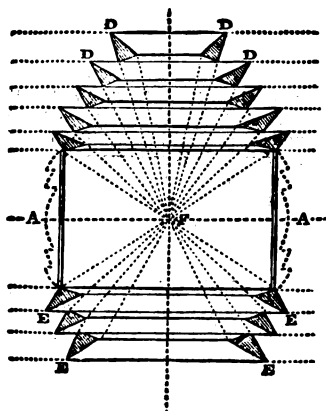

Catadioptric Zones.

F, the focus, and A A the principal lenses, as in the adjoining diagram; D D, the upper system of totally reflecting prismatic zones, and E E the lower portion of the system. The action of these prisms is explained in the next diagram.

The first example of this catadioptric apparatus was constructed by M. Tabouret,

who was connected with the French Commission des Ponts et Chaussées, a short time before the death of M. Augustin Fresnel.


One of the most important improvements which took place in pharology was the adaptation of this accessory on a much larger scale than had previously been supposed possible, by the suggestion of Mr. Alan Stevenson, who, in his construction of the Skerryvore Lighthouse, used every means to render this important edifice most complete in every respect. In conjunction with M. Leonor Fresnel and M. François, un., the constructors, this apparatus was added to the lower portion of the Skerryvore dioptric light, consisting of five glass zones, which replaced in the ordinary system four horizontal zones, each composed of thirty-two concave mirrors. In a fixed light apparatus of the first order, nineteen of these catadioptric zones replace eleven reflecting zones.

"Nothing can be more beautiful," says Mr. Alan Stevenson, "than an entire apparatus for a fixed light of the first order. It consists of a central belt of refractors, forming a hollow cylinder, 6 feet in diameter and 30 inches high; below it are six triangular rings of glass ranged in a cylindrical form, and above a crown of thirteen rings of glass, forming by their union a hollow cage composed of polished glass, 10 feet high and 6 feet in diameter. I know of no work of art more beautiful or creditable to the boldness, ardour, intelligence, and zeal of the artist."

The divergence of the polyzonal lens is much less than that of the parabolic reflector, being about $5^{\circ} 9'$, owing to the smaller angle subtended by the flame upon the inner surface of the lenses. From this cause, the flash in a revolving light is but of short duration, while that from revolving reflectors lasts much longer, from their greater powers of divergence. To compensate for this, the light from the lenticular apparatus is, within a certain distance, continuous; the upper and lower portions of the system giving a steady light.

FIXED AND FLASHING LIGHTS.—There is one character of light in the French (and other) systems which is peculiar, and requires special mention, as it does not appear to be properly understood by many, and is frequently an important distinction. This, the *feu fixe varié par une éclat* of Fresnel, has this appearance in a light whose period is four minutes: first, a bright fixed light, for above $3\frac{1}{2}$ minutes; then a short, but not total eclipse, for about 10 seconds; then a very bright flash, of much greater intensity than the preceding fixed light; then another short eclipse, and then the fixed light as before. In the larger apparatus the distinction between this and an ordinary revolving light is well marked by the intensity of the fixed light between the brighter flashes, and also especially by the short eclipses preceding and following the bright flash. In the smaller apparatus the bright flash is not so well marked; but the short eclipses will be a clear index to its character.

There are different modes of producing this effect. Fresnel's plan was to have an ordinary fixed light apparatus, around the outside of which two revolving panels of refractors passed in regular succession. These panels consisted of *vertical* lenses, similar to the *horizontal* central belt. They thus received on their inner surface all the light which issued from the central lamp through the fixed lens on the angle

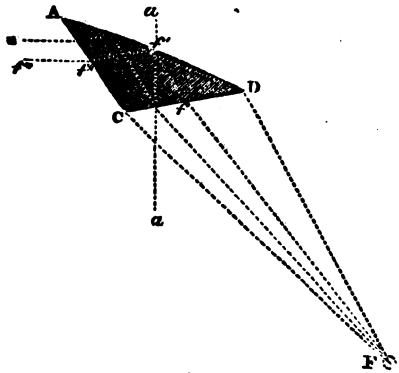


A D C will represent a section of this glass zone, which is so placed with regard to the focus, F, that a ray falling upon it at *f* will be at such an angle on D A, that instead of passing out, it will be *totally reflected* from that point of incidence, as *f''f'*, and will finally assume the direction, *f''f'*, of a right angle to the normal, *a a*, as required. This angle, in passing from glass into air, is about $41^{\circ} 49'$, and a greater angle of incidence gives a reflected ray. In the largest zone, the radius of the arc (the reflecting surface), D A, is equal to 28.46 feet, and the angle, D C A, is equal to $117^{\circ} 26' 42''$.

which they intercept, and which each refracts into *parallel* beams to the direction it faces as it revolves. Therefore, instead of the rays passing in all directions on that azimuth, a portion of them are collected and concentrated in one direction for the bright flash; and the angle between this bright beam and that emanating from the fixed portion of the apparatus is that which forms the eclipses. The upper and lower zones, of course, are those which maintain a constant light; so that the eclipses in this, as well as in most other lenticular lights, is not total within short distances.

Sometimes the flash is coloured *red*, as in the light on Chausey, Vièrge Island, Point d'Alpréché, &c.; and in a few cases *green*, as in some of the new Turkish lights, &c.

In another method of producing this effect, necessity for using two lenses is avoided; and,

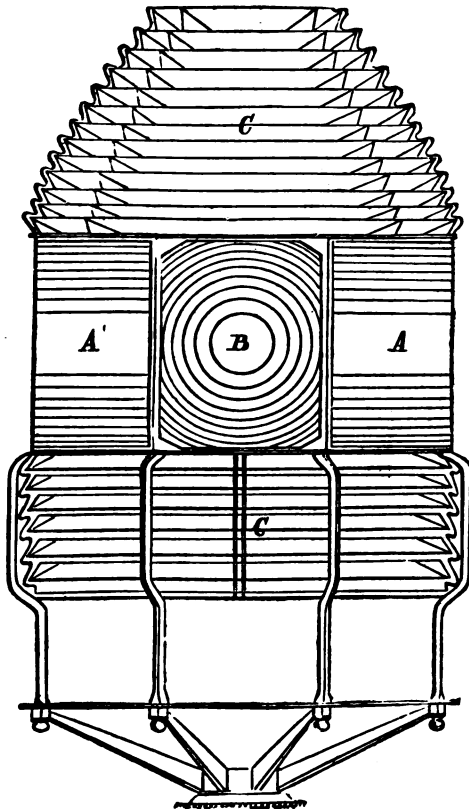

constructed by M. Letourneau, the consequently, the loss of light inevitable in the absorption of a portion in its passage through the glass. The adjoining diagram will explain it. In the central portion of the apparatus B is one of the polyzonal lenses, similar to those figured on page 21; on either side of this is a portion of a fixed light apparatus, shown by the horizontal belts A A. For a fixed light, of course, these horizontal belts are carried all round; and the light appears as a vertical stripe of the breadth of the flame from the top to the bottom of the belt. In the polyzonal lens the light appears to cover its whole surface, and is only visible when in front. The whole apparatus is made to revolve by machinery, and the appearance is as above described: first, the fixed light from the portions on either side; then a short eclipse due to the light being diverted by the great lens; then the full blaze of the lens for 8 or 10 seconds; then another eclipse, and so on.

This diagram will also explain another portion of the apparatus, of which a section is given on page 23. The upper and lower portions, C C, in this are the totally reflecting glass zones, which have now almost entirely replaced those figured on page 21, and their action is explained before. It is this part of the apparatus, as before mentioned, which is constantly visible within 10 or 12 miles in fine

weather, and is useful in fixing the position of the light in the intervals of the flashes.

It is considered by many, including the great Alan Stevenson, that the fixed and flashing light is not altogether a desirable variety, its appearance being too much like the revolving light; in fact, in our official lists, they were always set down as revolving lights till within the last few years.

In coast lights, when usually the light is not required all round the horizon, that is,

over the land in the rear, there would be a waste of the light from the great lamp, which, of course, suffices to illuminate the whole horizon. In the reflector light this is avoided, as a smaller number of lamps is used. But in the dioptric lights the light is economised by the use of spherical mirrors placed on that side. These spherical mirrors, usually of silvered copper, are formed to a curve, whose radius is equal to that of the focal lenses they are applied to (in first order lights, 3 feet), having the position of the flame as a centre. They thus reflect the rays back again through the flame upon the lenses on the opposite side. Flame, being perfectly transparent, there is no loss of power in this.

This method of economising light was practised, as aforesaid, by Thomas Rogers, about 1788; he used blown glass spherical segments made into mirrors. Mr. Alan Stevenson proposed it in 1834, and M.M. François and Letourneau have made them by grinding the glass to the focal curvature.

There are very many other considerations in the economy of Lighthouses that deserve notice, but which would unduly extend this brief description. The excellent works of Mr. A. Stevenson, and of his brother, Mr. T. Stevenson, will afford much instruction.

THE HOLOPHOTAL SYSTEM.

As far as they were applied, the catoptric and dioptric systems acted perfectly; but still there was some waste of light, caused in one direction by the divergence of the instruments, and, in another, by their construction. The consideration of this loss of power led to the next steps in the science of pharology; since that period, some new arrangements have been proposed, by which some of the disadvantages of the dioptric system have been partially avoided. M. Letourneau proposed lengthening the duration of the great flash of the dioptric lens, by dividing it into two portions, and setting each half at a slight angle outwards; this would produce the desired effect, but it must be at the expense of brilliancy. Several other minor improvements also have been suggested, but the main features of the system have remained unaltered.

There is some waste of light in both the systems. In the catoptric it is that angle comprised between the angle formed by the lips of the reflector and the flame and the horizontal ray which strikes the outer edge of the reflector. It is the angle $r P s$, in the upper part of the diagram on page 14. That portion of the light which passes upwards is, of course, lost for useful effect; the other portions may be considered as serviceable. In the year 1849, Mr. Thomas Stevenson, son of Robert, brother of Alan Stevenson, proposed some arrangements which obviate this loss, upon what is termed the *holophotal system*.*

The ordinary paraboloidal reflector is rendered holophotal as follows:—A small portion of the back of the reflector is cut off, behind the parameter, the line $B F D$, which passes through the focus (Diagram 14); for this is substituted a portion of a *spherical* mirror of the same focus. In front of the flame a lens with three diacatoptric rings is added. The action of the spherical reflector is to return all the rays impinged on it back through the flame, and thus on to the posterior sides of the lens and diacatoptric rings. Therefore, all the rays which emerge from the lens, &c., will be horizontal, and the remainder, those impinging on the paraboloid, will also be reflected in the same direction. Peterhead light (1859) is on this principle. The Horsburgh Lighthouse, in the strait of Singapore, is fitted with 9 such holophotal reflectors; three on each face of a revolving frame, each side of which, it is said, gives as much light as five reflectors of the ordinary kind. This was completed in 1851. Another one, on a large scale, is at Hoy Sound, Orkney. A similar apparatus, a red light, was placed at Wick, in Caithness, in 1851.

Fresnel's revolving light system, as at work in the Skerryvore and the Cordouan, with its beautiful but complicated upper system, is rendered holophotal by a very simple means. The zones above and below the main lenses act in the same way as

* "Holophotal;" from two Greek words, signifying "whole light."

the centre, that is, these zones, being made horizontal, are made of segments of circles concentric with the centre of the great lens beneath and above them; and, by the whole apparatus revolving, nearly the whole of the light is projected horizontally in the eight directions of the octagonal prism. Proceeding upon the assumption that the whole of the emitted rays from the central lamp may be made to assume the horizontal direction, Mr. T. Stevenson has made several most excellent arrangements, which, however, we cannot fully describe here. The simplest form is that of a hemispherical metallic reflector, in the focus of which is placed the lamp; before the lamp is a refracting polyzonal lens, of such a section that the whole of the direct rays from the lamp, and the reflected rays from the posterior reflector, are parallelized on their emergence. Carrying this principle to greater refinement, and as it was found that the totally reflecting glass prisms were effective compared with metallic reflections as 140 to 87, a hemispherical arrangement of glass is proposed, which, by refraction and total reflection, produces the same result as the metallic hemisphere in the former instance. The formulæ for the construction of this ingenious apparatus were calculated by Mr. William Swan, F.R.S.E. The glass refracting mirror has one advantage over a metallic mirror in its powers of radiation, as in an experiment the heat in the interior of the apparatus was so great as to cause the oil to boil: an inconvenience, however, which was afterwards obviated mechanically. Very numerous other applications of his principle are also proposed.*

The beautiful holophotal adaptations have been established at several important localities. The magnificent light at Whalsey Skerries, Shetland, constructed by Messrs. Chance, of Birmingham, is perhaps the most powerful apparatus yet in use. Lundy Island, St. Abbs Head (constructing), the Red Sea, &c., have examples of this extending system.

Mr. T. Stevenson has constructed a holophotal arrangement which he calls an azimuthal condensing light, by which the whole light is used down a narrow channel: there are examples at Oronsay and Kyle Akin (1857), west of Scotland. Another most ingenious appliance is that at Stornoway, Lewis Island, by which a Beacon on the dangerous Arnish Rock is made to show an *apparent* light, reflected by a peculiar apparatus from a light on the Lighthouse on the adjacent point.

As regards the history of the holophotal system, we may refer to Thomas Rogers's plan (1788), before mentioned. Sir David Brewster also proposed an arrangement of lenses, as a burning instrument, in 1812; and the same for Lighthouses, in 1823. Mr. Alex. Gordon, C.E., also constructed a combination of lens and reflector, which economised much of the stray light, in 1847. The carrying this system into full practice, by Mr. T. Stevenson, is as above related.

A first order lenticular apparatus is one of the most beautiful objects in the world. It is a combination of elements, nearly 12 feet high and 6 feet in diameter, constructed with the utmost skill and refinement, and involving in its structure some of the highest principles of applied science.

A *first* order light apparatus, as above said, is 12 feet high and 6 feet in diameter; and the cost of the lenses alone varies from £1,288 to £1,536; or, with the cost of all apparatus, and light-room or lantern, £2,488 to £2,984.

A *second* order of light apparatus is 4 feet 7 inches in diameter; the lens costs from £788 to £1,131, or altogether, £1,624 to £2,187.

A *third* order apparatus, diameter 3 feet 3½ inches, costs £378 to £704, or altogether, £882 to £1,456.

A *fourth* order, or *harbour* light, is 19½ inches in diameter; costs from £157 to £255 for the lenses, or £329 to £427 complete.

A *fifth* order harbour light, 14½ inches in diameter, costs £103 to £195, or £257 to £349 complete.

* See "Lighthouse Illumination; being a Description of the Holophotal System," &c. By Thomas Stephenson, F.R.S.E. London, 1859.

The *sixth* order, or smallest size of harbour, is $11\frac{1}{2}$ inches diameter; lens light costs about £70, or complete £216. *

In the early days of the lens lights we were entirely dependent on the French for their construction. The superior character of the St. Gobain and Premontre glass, and the appliances of MM. Soleil, François, Letourneau, Sautter, &c., kept them in possession of nearly all the construction of lenses in use. The only exceptions, in our country, were those made by Messrs. Cookson, of Newcastle-on-Tyne, who, about 1836, made some apparatus, as that of Hartlepool, &c. Later, however, the Messrs. Chance, of Birmingham, have largely entered on this important branch of manufacture, and many beautiful examples are the result of their enterprise.

M. Degrand, of the French Lighthouse Commission, has introduced another process for making the lenses, by forming them of thin sheets of moulded or *cast* glass. This is in use in the Beacon light of Walde Point, near Calais.

CHAPTER IV.

GENERAL REMARKS.

It is very important that the distinctive character of different Lighthouses, and especially of those near to each other, should be plainly marked, and easily recognized. It might be supposed that this was readily and well done, by the alternation of fixed and revolving, at different periods, flashing or double, and even treble lights; but very numerous accidents demonstrate that mistakes frequently occur. During fine and clear weather there is not any difficulty, with ordinary caution. It is the thick haze, snow and storms, driving scud, and all other embarrassments, which, while they tend to throw doubt on the ship's reckoning, also make it difficult to approach an unknown Lighthouse without running into danger. Therefore any distinction, by which one light can be instantaneously distinguished from another, is most useful. The difference in the aspect between the reflector and lens light is one of these, at the sailor's command.

At long distances (say above 10 miles) the flash from the revolving light from the reflector has a sensible disc, and will last a considerable time, 12 or 14 seconds if the revolution is 1 minute; that from the lens light will be whiter, more star-like, and will not last more than 7 or 8 seconds. Another distinction of the latter is, that the light is not totally extinguished between the flashes,—the upper and lower zones keeping constantly illuminated. This secondary light, at favourable times, is visible as far as the horizon of the place, and from 8 to 12 miles, according to the size of the apparatus, in ordinary weather. This is a marked distinction between the two systems, as the eclipse is total from the reflectors, even at short distances. But it must be remembered that the new holophotal system has also nearly total eclipses.

The distinction between the fixed lights, on either system, is not so well marked. The lens equally distributes the light, which is equally bright in all directions: on the other hand, the reflector light is brightest when immediately in front of the reflector, so that a vessel sailing past, when very distant, will find that the light at times gets fainter, till a short distance further brings her into the force of the next reflector.

Very much has been written upon the comparative merits and economy of the two systems. Perhaps the difference at times has been over-rated. At all events, it is

* These prices, which are common to nearly all manufacturers, are taken from the *Tarif* of Messrs. Chance, Brothers and Co., Birmingham (1860).

certain, that for fixed lights the advantages are all on the side of the lens, unless the arc illuminated be a small one.

The English reflector revolving lights, as before stated, are not considered inferior to their lens rivals. Many interesting comparisons and details will be found in the Parliamentary Report, the United States Report, and the works of Mr. A. Stevenson.

The *harbour and tide lights*, so numerous in the ensuing lists, have not been specially alluded to in the previous description. Where they partake of the catoptric or dioptric character, it will be understood from what has been said; but in many cases of pier, or small tide lights, they are simply the ordinary street gas lamp, with a coloured pane to distinguish it, or even the inferior hand-lamp.

In many cases, in our own country, these local lights are not worthy the position they occupy; in others, all improvements of construction and efficiency have been used. In most continental countries, as in France, Spain, &c., these local harbour and tide lights being all under the Government direction, they may all be included in the descriptions before given, as applied to the primary lights.

There is no regular system in the tide or harbour signals used in the United Kingdom: however desirable uniformity may be in this and other respects, the diversity of use is of less importance in practice, as the peculiar character of the signals are given for each place, and will be sufficient guide. More extended directions, in connexion with these signal lights, must be found in the special Sailing Directories, and the charts they elucidate.

The *distance* to which the principal lights are visible is generally limited by the horizon. There is no doubt but that they might be seen to very great distances, even 60, 80, or even 100 miles, if sufficient elevation could be gained to view them from. It is considered by many that 250 feet is the maximum height necessary or advisable, which will give an horizon 18 miles distant; and, by ascending the rigging, to 20 miles off. When a light is unduly elevated it is very liable to be obscured by clouds or fogs, and it is frequently a great detriment to those which are so. In the Tables, the height of the flame above the highest tide high-water level is given, so that it is the minimum range of the light; to this elevation 10 feet is added for the height of the deck of the ship above the sea. Besides the increased distance to which low water will cause the light to be seen, the effect of refraction will also sometimes increase their range.

The height of the tower, from base to summit, is frequently given, as it affords a means, by angular measurement by the sextant, of ascertaining the distance of the tower.

Many of the Lighthouses are handsome and commanding structures, and, generally, all modern erections; are made almost as available for day marks as their lights are for night. In many cases they are distinguished by some peculiarity, noticed in the lists, as mentioned on page 7.

When the light is dipping on the horizon it flickers greatly, especially in rough weather, an effect owing to the waves on the intervening horizon. The lights also appear *yellow* when in the neighbourhood of large towns, as Liverpool. This is owing to the smoke of the town. Observations on this point is recommended, as distant lights on land appear quite bright and white during and preceding rainy weather; while a yellow or reddish tinge indicate, almost certainly, a continuance or approach of fine weather.

It may readily be comprehended, that if the refinement of economising the light were carried to so great an extent without vertical divergence, the effect would be to send forth the light in such a thin disc that it would be invisible to a distant ship unless she were exactly on that part of the ocean which this thin disc of light touched some aberration is, therefore, absolutely necessary.

and such it continues. The Charter was dissolved in 1647, but was renewed by Charles II. on the Restoration, and the disposal of the funds was settled partly for charitable purposes. The Charter was surrendered to Charles II., and renewed by his successor in 1685; and the charitable uses of the funds of the Corporation were again settled. These funds were derived from various charges, such as pilotage, lastage, loadmanage, ballastage, &c.

The interest which the Trinity Corporation represented having, by the extension of commerce, grown into great magnitude, the Government interfered and altered some of their privileges at different periods, especially in 1854, when the Board of Trade partook of the supervision.

In *Scotland*, the Commissioners of Northern Lighthouses are the acting body, and were incorporated by the Act 38th Geo. III., c. 58. They have had the benefit of the special services of the family of Stevensons, often noticed previously.

In *Ireland*, the Ballast Board of Dublin acts in all Lighthouse matters. (See the 23rd Geo. III., c. 19.)

Besides these three public bodies there are very numerous local authorities, which deal with local lights. The principal among these are the Liverpool Board, the Trinity Houses of Newcastle, Hull, &c. The number of these separate bodies is very great; as, for the 402 Lighthouses in Great Britain, there are, at least, 174 different authorities to direct them.

The Colonial lights are chiefly under the control of the Board of Trade.

Like many other important interests, this has suffered from over legislation, as the Chairman of the Commission of 1861 says,—“It is difficult to discover the necessity for that cumbersome system which now exists, viz., *a single government* (the Board of Trade) for Lighthouses in the British possessions abroad; *a double government* for the Lighthouses under the Trinity House; *a triangular government* for the Scotch Lighthouses and for local lights in England; and *a quadrilateral government* for the Irish Lighthouses and for local lights in Scotland and Ireland;—a system which can scarcely be expected to find favour in the present day.”

In *France*, the Lighthouse service is under the ministry of Public Works, and a special Commission, called “Commission des Phares;” which body consists of naval officers, marine engineers, hydrographers, members of scientific bodies, and other gentlemen, distinguished for their scientific attainments in various professions, all of which have to do with branches of science connected with coast illumination. The general conduct of the service is under an officer called Directeur General des Phares, who is an engineer, and has other engineers under him.

In the *United States of America*, the lights are under one Central Board, constituted in 1852, and composed of a member of the Government, engineer officers, and officers of the army and navy, and civilians of high scientific attainments.

In *Sweden*, the lights are under the Admiralty, and managed by a director and officers who have military rank, and engineers.

In *Norway*, the service is under the Royal Marine Department.

In *Turkey*, it is under the Admiralty; and the system is now in course of development.

In *Hanover*, the service is under the Director-General of Waterworks.

In *Hamburg*, they are under the Committee for Harbours and Navigation.

In *Spain*, the system of administration is the same as in France; and the full development of the system is now in progress. The lights, &c., are under the department of Public Works, and under a permanent Commission composed of

engineers of superior rank of the Corps of Roads, &c., and naval officers; and the captains of ports are instructed to suggest improvements and report on the lights.

In *Denmark*, the service is under the Ministry of Marine, entrusted to one Light Engineer and two Buoy Inspectors.

In *Russia*, the superintendence is dependent from the Hydrographical Department.

In *Holland*, the management of Lights, Buoy, and Beacons rests with the Minister for the Marine, under whom are an Inspector-General and seven Inspectors.

In *Belgium*, the construction of Lighthouses is under the Minister of Public Works; but when built they are handed over to the general direction of the Navy, which is under the Minister for Foreign Affairs.

In *Austria*, the superintendence of all the Lighthouses, Buoy, and Beacons belongs to the Imperial Royal Admiralty. The Deputies of the Exchange, at Trieste, attend to Lighthouses, — their erection, management, collection of dues, &c.

In conclusion, an inspection of these most useful monitors to the sailor is recommended to him. He will then see that the beauty of the apparatus, the discipline, order, cleanliness and perfection of everything connected with them are not exceeded by their utility.

EXPLANATION OF THE TABLES.

NAME AND CHARACTER OF LIGHT—FIRST COLUMN.

The principal coast lights are given in capitals, as N. FORELAND. Secondary lights in smaller capitals, as SHOREHAM HARBOUR. Tide lights in italics, as *Ramsgate*. The character of the light follows its name.

GEOGRAPHICAL POSITION—SECOND COLUMN.

The latitudes and longitudes here given are presumed to be accurate, within less than 1', for all the coasts of the Atlantic Ocean and its Seas. In other parts of the world it may vary somewhat more; but there is no great discrepancy, such as would lead to serious consequences, by taking any one of them as a point of departure.

DESCRIPTION OF THE LIGHT, &c.—THIRD COLUMN.

In this, any peculiarity of the light, or period of a Tide light, is noticed; and also the direction of double lights. In many cases the bearing of two lights when in one will lead clear of a danger, as the S. Foreland in one, W. by N., clears S. end of the Goodwin, &c. Special directions will explain this.

DESCRIPTION OF APPARATUS—FOURTH COLUMN.

In this, the signs used to indicate the sort of light apparatus in use in each case:—

- signifies a catoptric, or reflector light. (See page 14, &c.)
- 1 a, 2, 3 d, &c., indicate dioptric, or lens lights, the figure showing the order or size, 1st, 2nd, 3rd, to 6th order. (See page 26.)
- a, a fixed lenticular light. (Page 22.)
- b, a revolving lenticular light. (Page 21.)
- c, a fixed and flashing light. (Page 23.)
- d, a holophotal light. (Page 25.)

These figures and letters will serve to explain the peculiarities of the Lenticular System, as in operation therein.

HEIGHT ABOVE HIGH WATER—FIFTH COLUMN.

This gives the height of the *flame* in feet above the highest tide level, consequently it is its minimum height, and is increased by the tidal range of the place. The height of the Lighthouse itself, from base to summit, is given sometimes in the third column.

VISIBLE IN MILES—SIXTH COLUMN.

This gives the minimum distance to which the light can be seen, in clear weather, from a height of 10 feet above the sea level. But in the case of the principal lights this but imperfectly represents their range, as they could be seen at any distance attainable by increased elevation. In the use of *coloured* lights this range is given according to their presumed power.

YEAR ESTABLISHED—SEVENTH COLUMN.

The date of the first exhibition of the light is usually given; but its character, &c., may have been frequently changed in the interval.

LIGHTHOUSES.

ENGLAND.

Thames Mouth.

Name and Character of Light.	Lat. N. Long. E. o ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
RIVER THAMES Northfleet		White light in fairway; red over anchorage in Gravesend Reach and Broadness.....	●	..	..	1859
Hope Point Fort		A single lamp for Colliers.....	..	..	..	1852
Mucking Flat, Pile Light House		Bright East of N.E. by E., red to W.; also red ray toward Blyth buoy, and red N. of fairway in Sea Reach.....	2a	40	11	1849
Chapman Head		Bright in fairway channel, red to N. A fog-bell	2a	40	11	1849
Southend Pier-head		Red fixed light.....	..	..	..	1840
Sheerness		Red gas-light on Garrison Pt. ..	..	32	5	1859
NORE LIGHT-VESS. One br. rev. lt. $\frac{1}{2}$ min.	51 29. o 48.	In 3 fathoms at East end of the Nore Sand	●	38	10	1734
GIRDLER LT.-VESSEL One br. rev. lt. $\frac{1}{2}$ min.	51 29. 1 7.	In 3 $\frac{1}{2}$ fathoms W. Girdler Sand at W. entrance of Princes Chan.	●	38	10	1848
PRINCES CHANN. LT. VES. One red rev. lt. 20 secs.		In 3 $\frac{1}{2}$ fms. N. side of Channel, between Girdler and Tongue Light-Vessels	●	38	10	1856
TONGUE LIGHT-VESSEL. Upp. br., low red, F. lts.	51 29. 1 19.	In 10 fathoms at E. Tongue Sand one red ball. Lights at unequal heights	●	38 14	10 ..	1848 ..
Herne Bay Pier		Fixed light at Pier-head	..	..	..	1857
Margate Pier One red fixed light	51 24. 1 23.	At West end of Pier, also a small light on Jarvis landing-place	●	85	10	1829
MOUSE LIGHT-VESSEL One bright fixed light	51 32. 1 o.	In 4 fathoms, at W. end of Sand	●	38	10	1838
MAPLIN PILE LIGHTHO. One red fixed light	51 35. 1 3.	Painted red, light not vis. over the sand; a bright ray to S. $\frac{1}{2}$ W.	2a	36	10	1838
SWIN MIDDLE LT.-Vess. One br. rev. lt. 1 min.	51 39. 1 7.	In 4 fathoms at West end of Sand	●	38	10	1837
GUNFLEET PILE LT. HO. One red rev. lt. 2 min.	51 45.8 1 20.	On S.E. side of Sand; keep $\frac{1}{2}$ mile off and do not pass to N.	●	41	9	1850
SUNK LIGHT-VESSEL One bright fixed light	51 46.7 1 28.	In 10 fathoms in fairway of East Swin.....	●	37	10	1802
KENTISH KNOCK LT.-VES. One br. rev.-lt., 1 min.	51 40.8 1 40.5	Has two red balls vertically. In 11 fms. on E. side of Sand ..	●	37	10	1840
GALLOPER LT.-VES. Two br. fixed lights	51 45. 1 56.	In 20 fms. on E. side of Sand; lights horizontal	●	36	10	1803

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
NORTH FORELAND One bright fixed light	51° 22.5 1° 26.8	White tower 78 ft. high. A strip of red lt. to E. end of Margate Sand	1a	184	19	1636
Ramsgate Tide Lights One red, two green lts.	51° 20. 1° 26.	While 10 feet. The low green lt. is changed to red with 10 feet. a red tide ball by day	4a	37	6	
GOODWIN LT.-VESS. Three br. fixed lights	51° 19. 1° 35.	Off the N. end of the Goodwin Sands, in 9 fathoms	●	28 42	10	1793
GULL STREAM LT.V. One br. rev. lt., 20 secs.	51° 17. 1° 30.	On the W. edge of the Goodwin Sands, in 8½ fathoms	●	14	7	1809
SO. SANDHD. LT.VES. One bright fixed light	51° 10. 1° 28.	Off the S. end of the Goodwin Sands, in 13 fathoms	●	38	10	1832
SOUTH FORELAND Two br. fixed lights	51° 8.4 1° 22.4	In one W. by N., 1,347 feet apart	1a ●	372 275	25 22	1793 1842
DOVER One green light Red Tide Lights Blue light on Admiralty Pier	51° 7. 1° 19.	N. Pier: one red lt. while 7 feet. S. Pier: one red lt. while 7 to 10 ft.; two red lts. while 10 to 13 feet. The green light only toward the entrance	● ..			1842 1852
Folkestone Tide Light	51° 5. 1° 11.	One fixed red light, while 10 feet	●	36	6	1810
VARNE LT.-VESSEL One red, quick revol. lt.	50° 56. 1° 18.	In 16 fathoms at W. end of the Shoal	●	36	10	1860
DUNGENESS One bright fixed light	50° 54.8 58.3	A red tower on the point. Fog bell	1a	92	14	1789
Rye Tide Lights Two bright fixed lts.	50° 57. 0° 44.	On N. side of the entrance while 10 ft.; in one N. by W. 640 feet apart		26 16	4 3	
HASTINGS One bright, one red lt.	50° 52. 0° 36.	In one, N.N.E., 508 feet apart, to direct the fishermen (September 29 and March 25)		60 30	7 4	
Eastbourne	50° 45. 0° 17.	A lamp in the fishing season	..	10	2	
BEACHY HEAD A br. rev. light, 2 min.	50° 44.2 0° 12.9	A white lighthouse, 47 feet high, on summit of Belletout Cliff ..	●	285	22	1828
NEWHAVEN A br. fixed lt. & Tide Lt.	50° 47. 0° 4.	On the W. pier. The tide lt. red between 10 and 13 feet; bright above 13 feet	● ..	28 17	8 7	
	Lat. N. Long. W.					
BRIGHTON CHAIN PIER.	50° 47. 0° 4.	One green fixed light	..	35	10	1824
SHOREHAM HARBOUR A br. fixed lt. and red Tide Light	50° 50. 0° 15.	On central pier, bright Tide light while 11 feet, but red at H. W.	4a ..	42 23	10	1825
Littlehampton	50° 48. 0° 32.	A fixed red light on E. pier	●	30	9	1848

Name and Character of Light.	Lat. N. Long. W. o ' /	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
OWERS LT.-VESSEL One bright fixed light	50 39.7 o 39.9	On the S.E. end of the Owers Shoal, in 19 fathoms	●	38	10	1788
BEMBRIDGE LT.-VESSEL Two bright fixed lights	50 41.7 1 1.7	Near the Nab Rock, off Bembridge Point, in 5 fathoms....	●	38 28	10 8	1812
ST. CATHERINE'S One brilliant fixed lt.	50 34.5 1 17.8	A handsome stone tower, 105 feet high	1a	178	18	1840
WARNER LIGHT-VESSEL One br. rev. lt. 1 min.	50 43.8 1 4.	In 13 fathoms, on the Eastern part of the Shoal.....	●	38	8	1854
RYDE PIER		A bright fixed light	5a	21	12	1852
SOUTHSEA CASTLE One red fixed light	50 46.6 1 5.2	A strong red light on Castle. Shows green from W. of the Spit Buoy.....	●	31	9	1822
SOUTHAMPTON PIER Two fixed red lights	50 53.7 1 24.4	In one, lead up the Channel. Also two red lts. at the Docks in one lead up	..	..	..	1841
CALSHOT LIGHT-VESSEL One bright revol. light 1 min.	50 48. 1 16.	Off Calshot Castle, in 3½ fathoms	●	32	9	1842
YARMOUTH CASTLE One fixed light		Red light in centre leads in; bright or green, outside	..	12	..	1857
NEEDLES OUTER ROCK One fixed light	50 39.7 1 34.5	Shows RED (except between W. and W.N.W.), when it shows WHITE. Shows WHITE also to N.E. by E. ¼ E. A faint lt. inside Warden Ledge Buoy. Fog bell.	1a	80	9	1859
HURST BEACH Two bright fixed lights	50 42.4 1 32.9	In one, N.E. by ¼ E., 755 feet apart. Another light in the low lighthouse shows only up the Solent	● ●	66 29	12 9	1812 1786
POOLE Two red lights	50 41. 1 58.	In one, N. ½ W.; 786 feet apart on N. side of entrance. Also four lights inside.....	● ..	37 16	6	1848
Swanage Pier		One fixed light intended	..	..	..	1861
WYEMOUTH One red fixed light	50 37. 2 26.	On the S. pier head	..	23	21	1853
PORTLAND High lt., br. and fixed Low lt., br. and fixed	50 31.3 2 27.3	White towers, 32 and 86 ft. high near the Bill. In one, N.N.W. ¼ W., 1609 feet apart.....	1a	222 145	19 16	1716 1789
PORTLAND BREAKWATER One fixed red light		On the end of the Stage.....	..	30	9	1851
SHAMBLES SHOAL LT. VES. One fixed light		On E. end of Shoal, in 15 fms.	●	38	10	1859
Lyme Regis Tide Lights One red, one green light	50 43.5 2 55.9	From half flood to half ebb. In one, N.W. ¼ N., 825 ft. apart		11 21	.. 4	1853

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
TRIGNMOUTH Two <i>red</i> fixed lights	50 33. 2 28.	One on a limestone tower on S.W. end of Denn; other on a house	●	31	61	1845
BRIXHAM One <i>red</i> fixed light	50 24. 3 30.	On an iron stand on the pier head	●	20	6	1839
Torquay Pier Head	50 27.5 3 31.	One fixed <i>red</i> light	..	15	5	1852
DARTMOUTH One <i>red</i> fixed light	50 20. 3 33.	W. side of entrance	●	80	10	1857
START POINT One brilliant revolving light, visible every minute	50 13.3 3 38.5	A white tower, 94 feet high. A fixed lt., 192 ft. high, is also vis. from tower, when it bears S. of W.S.W. A bell in fogs	1a	204	19	1836
PLYMOUTH BREAKWATER One bright and one <i>red</i> light	50 20.4 4 9.5	On W. end; bright to seaward, but <i>red</i> E. of N.E. $\frac{1}{2}$ E. from it. A lower br. lt. is seen when the channel is open. A bell during fogs	2a ..	63 48	9	1844
PLYMOUTH HARBOUR One bright fixed light	50 22. 4 7.	A tower, 20 feet high, on the W. Barbican pier head.....	●	29	6	1822
EDDYSTONE One brilliant fixed lt.	50 10.8 4 15.9	An admirable <i>red</i> and <i>white</i> stone tower, 89 ft. above foundation on the rock, which covers 14 ft. at high water. Bell in fogs	2a	72	13	1759
FALMOUTH One rev. lt. in 20 secs.	50 8.6 4 59.5	A white tower, 62 feet high, on St. Anthony's Point	●	72	12	1835
LIZARD Two brilliant fixed lts.	49 57.6 5 2.1	Two white towers, each 61 feet high, W. $\frac{3}{4}$ N. and E. $\frac{3}{4}$ S., 223 feet apart, on the Lizard Cliff	● ●	229 232	20 20	1751
WOLF ROCK One light, proposed	49 56.7 5 48.2	(Proposed, on the rock.)	..	..	..	1861
<i>Penzance Tide Light</i> A fixed <i>red</i> light, while 15 ft. inside; <i>green</i> while less	50 7. 5 31.	A white building, 22 feet high, on the S. pier head. By day, a ball while 15 feet.....	5a	33	9	1855
LONGSHIPS One brilliant fixed lt.	50 4.1 5 54.7	A white square tower, 51 feet high	●	79	14	1795
SEV. STONES LT. VES. Two bright fixed lights	50 32. 6 7.3	On the E. side of the rocks, in 40 fathoms. Two <i>red</i> balls	●	20 38	10	1841
SCILLY One br. revol. lt. every minute	49 53.5 6 20.7	A white tower, 74 feet high, on the summit of St. Agnes' Island	●	138	16	1680
BISHOP ROCK One fixed bright light	49 52.5 6 26.6	On the S.W. rock. A noble stone tower, 147 feet high....	1a	110	16	1858

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
<i>St. Ives Tide Light</i> One bright fixed light, while 10 feet		On the pier head. Lighted from 1st September to 30th April	●	23	7	1831
<i>Hayle Tide Lights</i> Two fixed bright lts.		N. 25° E. and S. 25° W., 207 ft. apart, while 12 feet water....	●	81 59	6	1840
GODREVY One flashing lt., 10 secs.	50 14. 5 24.	On the Island. A bell in fogs..	1c	120	15	1859
TREVOSE HEAD Two bright fixed lights	50 32.9 5 2.1	The lower light is 50 feet to sea- ward of the upper	1a 1a	204 129	20 17	1847
Bristol Channel.						
LUNDY ISLAND Upper lt., rev. in 2 min. Lower fixed light	50 10.0 4 40.3	In one tower, 96 feet high. Low light visible to W. between N.N.W. and W.S.W.	1b ●	540 470	31	1820
<i>Bideford Harbour.</i> Two bright fixed lts.	51 4. 4 12.	In one, S.E. $\frac{1}{2}$ S., lead over bar; from $\frac{1}{2}$ flood to $\frac{1}{2}$ ebb. A red ball by day	●	86 40	14 11	1820
ILFRACOMBE One red fixed light	51 13. 4 7.	From the Lantern Hill (Michael- mas to Lady-day)	●	100	15	
BURNHAM, or BRIDGEW. Upper light, intermit- ting Lower light, fixed	51 14.9 2 59.9	Upper tower white; lower with black streak, E. by S. $\frac{1}{2}$ S., 1,500 feet apart. Upper light bright, $3\frac{1}{2}$ min., obscured $\frac{1}{2}$ min.	●	91 23	16 9	1832
AVON One bright fixed light	51 30.0 2 42.2	White tower, 65 feet, on the E. side. A red ray to N.W. $\frac{1}{2}$ N.	2a	70	13	1840
ENGLISH AND WELSH GROUNDS LT.-VESSEL One br. rev. lt. 1 min.	51 26.5 2 58.	On S. side of Bristol Channel, in 5 fathoms; a red ball, gong, gun, &c.	●	38	10	1838
FLATHOLM One bright fixed light	51 22.5 3 7.	A white tower, 89 feet high, on the S. point	1a	156 ..	17 ..	1839 1839
USK RIVER One bright, one red lt.	51 32. 3 0.	W. side of entr., the red lt. 20 ft. below; red light also to N.E.	●	39	10	1821
CARDIFF	51 28. 3 10.	On the pier (intended)	●	..	..	1860
NASH POINT Two bright fixed lts.	51 24. 3 33.	White towers, 1,000 ft. apart, S.E. by E. $\frac{1}{2}$ E., & N.W. by W. $\frac{1}{2}$ W.	●	167 122	18 16	1832
SWANSEA HARBOUR One red fixed light	51 37. 3 56.	While 8 ft., black ball by day. Also two red or green lts. on new S. Docks	..	28	9	1803
MUMBLES One bright fixed light	51 34. 3 58.2	A white tower, 56 feet high, ad- joining the Fort	●	114	15	1798
HELWICK LIGHT-VESSEL One br. rev. lt. 1 min.	51 31. 4 24.	In 16 fathoms, off the W. end of Sand, a red ball, gong, gun, &c.	●	38	10	1846
Llanelly Two fixed lights	51 40. 4 10.4	One on S. end of Breakwater, one on Whiteford Point, from $\frac{1}{2}$ flood to $\frac{1}{2}$ ebb	● ..	36 ..	7 ..	1850 1854

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
<i>Pembrey Harbour</i> One fixed light	51 41. 4 15.	While 10 feet water	●	35	9	
<i>Saunders foot, S. Pier</i>		One red lt. or yell. ball while 8 ft.	..	15	..	
<i>Tenby Pier Head</i>		One red tide light, for steamers, &c.	..	14	3	1856
CALDY ISLAND One bright fixed light	51 37.9 4 41.	A white tower, 56 feet high, S. part of Id.	●	210	19	1829
ST. ANN'S POINT. Two bright fixed lights	51 40.9 5 10.5	Two white towers, 75 and 39 ft. high, 610 ft. apart, N. by W. $\frac{1}{2}$ W.	● 1a	192 159	10 17	1841
SMALLS One bright fixed light	51 43.2 5 40.1	Timber, painted red. A new granite tower, 141 ft. high, building, 1861, for a second light..	● 1a	70 125	13 16	1778 1861
Wales.						
S. BISHOP ROCK One br. rev. lt. 20 secs.	51 51. 5 25.	A white tower, 36 feet high	1b	144	18	1839
CARDIGAN BAY LT.-Vess. One rev. red lt., 30 secs.		Between South Bishop and Bardsey Id. lighthouses.....	●	40	9	1860
<i>Aberystwith</i>		Two fixed lights occasionally ..				
BARDSEY ISLAND One bright fixed light	52 45. 4 47.9	A square white tower, 99 feet high	1a	129	17	1821
CAERNARVON One red and one bright fixed light	53 8. 4 24.7	Red light on Llanddwyn Point; bright light on pier head	●	50	5	1845 1858
SOUTH STACK ROCK One br. rev. lt. 2 min.	53 18.4 4 41.9	White tower, 84 feet. During fogs a rev. light is shown at 40 feet. Bell, gun, &c.	●	201	19	1809
HOLYHEAD HARBOUR One bright fixed light	53 18.8 4 37.1	On the old pier head; a red light also to N.N.E.; a bell and gun in fogs. Also two temporary red lights on jetty	●	44	11	1820
— Breakwater Lt.-Ves.		One red lt. near E. end of works	●	20	4	1850
SKERRIES One bright fixed light	53 25.2 4 36.4	A white tower, 75 feet high, on the highest island	1a	117	15	1803
AMLWCH PORT	53 25. 4 20.	One br. light when practicable	●	26	9	1817
LYNUS or ELIAN PT. One intermitting light	53 25. 4 17.3	A white building, 36 feet high. Lt. vis. 8 secs.; eclipsed 2 secs.	●	128	16	1835
MENAI	53 18.9 4 2.3	One red fixed light on Trwyn-Du Point	1a	61	10	1837
AIR POINT One br. or red fixed lt.	53 21.4 3 19.2	A pile lighthouse; lt. is red only within Hoyle Sand; fog bell	●	42	9	1844
LIVERPOOL N.W.LT. SHIP Three br. fixed lights	53 27. 3 17.4	In 7½ fms. off the Horse and Helbre Channels; burns a blue lt. every 2 hours; a black ball. In fogs, a bell and gong alternately ..	●	36	10	1814

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
HOYLAKE Two br. fixed lights	53 23.7 3 10.7	In one, S.W. by S., 1,200 feet apart, near the Church	●	55 31	13 11	1763
BIDSTON One bright fixed light	53 24. 3 4.4	A stone tower, 68 feet high, on the hill	●	228	23	1771
LEASOWE One bright fixed light	53 24.8 3 7.5	On the shore, between the Mer- sey and Dee	●	94	14	1763
BLACK ROCK One rev. lt. 1 minute br. twice; red once	53 26.6 3 2.	A white tower, 94 ft. high. Also a fixed light, while 11 ft. down Rock Channel and up Mersey	●	61	14	1830
CROSBY LIGHT-VESSEL One yellow fixed light		In 44 feet off the N.E. elbow of the Burbo Bank; a red ball ..	●	29	8	1840
FORMBY LIGHT-VESSEL Two fixed lights	53 31.7 3 10.8	At the elbow of Crosby and Queen's Channels, in 25 feet	●	30 24	8	1834
CROSBY LIGHTHOUSE One red fixed light	53 32.3 3 3.9	Near the Point	●	95	12	1856
RIBBLE RIVER Upper, br.; lower, red lt.	53 44.6 3 1.1	In the same tower, on Stanner Point	4a ..	72 35	12 9	1848
<i>Lytham Harbour</i>	53 44.2 2 58.5	One fixed light	●	..	..	
<i>Fleetwood</i> Two bright fixed lights	53 55.6 3 0.4	N. and S., 850 feet apart; shown while 9 feet	● ..	90 30	13 9	1841
WYRE RIVER One bright fixed light	53 57.2 3 1.8	A pile lighthouse, on N.E. of N. Wharf Bank; fog bell	..	30	10	1840
<i>Lune River</i> Two bright fixed lights	53 59. 2 53.	On Cockerham Point and Plover Scar Rock, while 8 feet water	● ●	54 20	9	1847
CLARK WHARF SPIT One fixed red light	54 1.3 3 0.	On red piles. A ball by day; a green light while 8 ft. Fog bell	●	30	6	1854
POULTON PIER	54 4.3 2 52.5	One fixed bright light	6a	48	8	1851
WALNEY ISLAND One br. rev. lt. 1 min. One red fixed light	54 2.9 3 10.6	On the S. point. In one, N.W. by W. $\frac{3}{4}$ W., 340 yards apart. A red lt. also on Railway Viaduct	●	70	13	1790
ST. BEES HEAD One bright fixed light	54 30.8 3 38.	A white tower, 43 feet high	●	333	23	1821
WHITEHAVEN 1. One rev. lt., 2 min. 2. Two fixed lights	54 33.2 3 35.8	1. A white tower, 37 ft. high, on W. pier. 2. Red lt. on Old Quay while 9 feet. Blue lt. on N. pier	..	47	11	1823
<i>Harrington Tide Light</i> One fixed light	54 37. 3 34.	On the pier head, while 8 feet water. Red ball while 8 feet	●	44	11	1848
<i>Workington Tide Lights</i> Two fixed lights	54 39. 3 35.	On the ends of St. John's and Wooden piers, E. and W., 330 feet apart, while 8 feet water	..	53	11	1825

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
MARYPORT One br., one <i>tide light</i> One <i>green</i> , one <i>red light</i>	54 43. 3 30.3	Fixed lt. on Outer pier head. <i>Tide light</i> , while 8 ft., on Inner pier. <i>Red</i> lt. on Starboard side, and <i>green</i> lt. on North Tongue....	4a ..	51 ..	12 10	1796 1866
SOLWAY LIGHT-VESSEL One <i>red light</i>	54 48. 3 32.	In 4½ fms. in Robin Rigg Channel. Black ball; a bell in fogs	●	25	6	1841
LEE SCAR One bright fixed light	54 51.8 3 24.7	On piles on the rocks. A bell in fogs	..	25	6	1841
SKINBURNESS One <i>red light</i>	54 52.5 3 23.	A white wooden building, 32 ft. high, on Sillioth Point	..	40	9	1841
<i>Carlisle Port Tide Light</i>		A lamp on the pier head	..	..	..	1841
Isle of Man.						
POINT OF AYR A rev. lt., br. and <i>red</i> , 2 min.	54 24.9 4 22.	A stone tower, 90 feet high, ½ mile S.W. of the Point	●	103	15	1818
<i>Peel Harbour</i>		Bright lt. on E. side of entrance	..	21	8	1811
CALF OF MAN Two br. rev. lts., 2 min.	54 3. 4 50.	Two stone towers, 560 feet apart, N.E. ½ E., and S.W. ½ W. ..	● ..	375 282	25 23	1818
PORT ST. MARY		One bright light on pier head ..	●	25	9	1812
CASTLETOWN HARBOUR		One fixed lt. on New pier head	..	32	8	1849
DERRY HAVEN Two fixed lights	54 5. 4 36.	On Fort Island, and S.W. end of Breakwater		50 14	6 2	1850
DOUGLAS One bright fixed light	54 9. 4 28.	A brown stone tower, 65 feet high, on Douglas Head	..	104	15	1832
DOUGLAS HARBOUR		One fixed lt. on the N. pier head	..	34	6	1796
RAMSEY HARBOUR		One fixed <i>red</i> lt. on S. pier head	●	28	10	1845
BAHAMA BANK L.V. Two bright fixed lights	54 20. 4 12.	In 11 fathoms, on the S.E. part of the Bank	● ..	20 33	10	1848

Name and Character of Light.	Lat. N. Long. E. o ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
HARWICH Two fixed lts.; in one N.W. by N.	51 56.6 1 17.4	A lower <i>red</i> lt. in high tower vis. S. of entrance, becomes white in fairway (see Directions).	●	69 25	13 10	1818
DOVERCOURT Two lighthouses		Building on the extreme point, to supersede present Harwich lts.	..	..	..	1861
Landguard Fort		A <i>red</i> light outside, white within the entrance	6a	..	..	1848
CORK LIGHT-VESSEL One br. rev. lt. $\frac{1}{2}$ min.	51 56. 1 23.	In 4 fathoms, near the Cork Ledge	●	38	10	1840
SHIPWASH LT.-VESSEL One bright fixed light	52 1.5 1 38.	In $9\frac{1}{2}$ fathoms, off N.E. end of the Sand	●	38	10	1837
ORFORDNESS Two bright fixed lights	52 5.6 1 35.2	Towers <i>red</i> ; in one S.W. by W. and N.E. by E., 1439 yards apart. High light to South...	1a ●	83 63	14 13	1792
Pakefield	.. : .	<i>Red</i> light; only shows to S. $\frac{3}{4}$ E.	●	68	9	1832
LOWESTOFT Two bright fixed lights	52 29.2 1 45.5	Towers white; in one N. $\frac{1}{2}$ E. and S. $\frac{1}{4}$ W., 1013 yards apart. High light to North	● ●	119 45	16 11	1609
STANFORD LIGHT-VESSEL Two bright fixed lights	52 29. 1 47.2	Near Mid channel in 6 fathoms; lights horizontal; two <i>red</i> balls	●	23	9	1802
ST. NICHOLAS GAT LT.-V. One bright, one <i>red</i> lt.	52 35.5 1 47.	In 6 fms. at N. end of Kettle Bottom Sd.; one <i>red</i> ball; lts. at unequal heights	a ●	40 12	10 4	1827
Yarmouth or Gorleston One <i>red</i> fixed light	52 34.4 1 44.3	A <i>red</i> flag by day, and the light shown during the flood tide ..	●	..	2	1852
COCKLE LIGHT VESSEL One brt. rev. lt. 1 min.	52 41.5 1 47.	In $6\frac{1}{2}$ fathoms at E. side of N. entrance of Cockle Gat	●	36	10	1844
WINTERTON NESS One bright fixed light	52 43. 1 41.5	An octangular <i>red</i> tower 61 feet high	●	52	14	1790
NEWARP LIGHT-VESSEL Three br. fixed lights	52 45. 1 53.	Lts. triangular. In 19 fms. at N. end of Sand. Three <i>red</i> balls	●	38 28	10	1791
HASBOROUGH Two bright fixed lights	52 49. 1 32.	In one N.W. $\frac{1}{2}$ W. ($\frac{1}{2}$ mile apart) leading lts. for Hasboro' Gat	●	137 100	17 15	1791
HASBOROUGH LT.-VESSEL Two bright fixed lights	52 58. 1 36.	In 15 fathoms near N. end of Sand; lights horizontal.....	●	38	10	1832
LEMAN & OWER LT.-VES. Upper revol. 1 min., low fixed light	53 8.6 2 1.	In 16 fms. between the Sands; lts. at unequal heights; two <i>red</i> balls	●	38 27	10	1840
CROMER One br. revol. 1 min.	52 55.4 1 19.1	Near the Cliff, a white tower 59 feet high	●	274	23	1719 1833
HUNSTANTON One bright fixed light	52 56.9 0 29.8	The light is <i>red</i> to S.E. by E. $\frac{1}{4}$ E. over the Roaring Middle Sand	2a	109	16	1665

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
LYNN WELL LT.-VESSEL One quick revol. light	53 1.7 ° 25.	In 27 fathoms off the hook of the Long Sand	●	34	10	1828
DUDGEON LIGHT-VES. One bright fixed light	52 15. ° 56.	In 9 fathoms near S. side of the Shoal	●	38	10	1736
SPURN LIGHT-VESSEL One br. rev. lt. $\frac{1}{2}$ min.	53 34. ° 13.	In 9 fathoms off the Point.....	●	38	10	1820
SPURN POINT Two bright fixed lights	53 34.7 ° 7.2	In one N.W. $\frac{1}{2}$ N. (158 yards apart). The low light to N.W.	1a 4a	93 54	15 12	1776 1851
RIVER HUMBER						
Bull Sand Lt.-Vessel		One bright fixed lt. off Spurn Pt.	●	21	10	1832
	W. Lon.					
Stallingborough Ferry		One bright fixed lt. to W.S.W.	●	..	..	1849
Killingholm Three br. fixed lts.	53 39. ° 12.	Lights in one N.W. lead up the river, and when S. by W. lead down	●	68 36	11	1836 1852
Paull		One bright fixed light	●	36	7	1836
Hebbles Light Vessel One red fixed light	53 44. ° 16.	In 5 fms. on S. side of Channel, near Hull	●	16	5	1839
Bridlington One bright fixed light	54 5.2 ° 11.7	On the North Pier-head while 9 feet water.....	..	24	8	1852
FLAMBORO' HEAD One revol. light, 2 min. bright; bright and red alternately	54 6.9 ° 4.8	A white tower 87 feet high. Bear- ing N.N.E. clears N. end of Smithie.....	●	214	29	1806
Scarborough Tide Light One fixed light, red to seaward	54 17. ° 23.	While 10 feet water; on Vincent Pier. A ball by day.....	..	58	13	1806
HIGH WHITBY Two bright fixed lights	54 28.7 ° 34.2	In one S. by E. $\frac{3}{4}$ E. (258 yards apart). A red light from N. tower over the Scar	1a ea.	240	23	1858
WHITBY HARBOUR One green tide light One red or green light	54 30. ° 37.	Green tide light on W. Pier from 2 hours flood to 2 hours ebb. E. Pier light red to S. but green to N. of Rock buoy.....	● ●	83 54	13 10	1831 1855
TEES BAY						
BRAN SAND High br., low red lt.	54 38. ° 13.	Wooden towers shifted occasion- ally. In one lead over the bar	●	53 38	11 10	1839
Care Sand Lt.-Vess.		One fixed light. There are 8 small lights up the Tees	●	20	7	1836
SEATON High br., low red lt.	54 40. ° 12.	In one N.W. by W. (118 yards apart).	●	89 34	13	1839
HARTLEPOOL High bright, low red tide light	54 41.8 ° 10.4	On the Heugh. The red tide lt. from half flood to half ebb....	1a 4a	84 62	15 4	1847

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
Hartlepool Old Harbour		Red light on Pier, two red lights on Quay		..	..	1836
—— West Harbour		Green lt. on N. Pier, two red lts. in one lead in while 10 ft. water		..	..	1855
SEAHAM Upper bright fixed lt., low red rev. lt. $\frac{1}{4}$ min.		In one stone tower 58 feet high on Red Acre Point.....	5a 6	94 49	14 11	1843 1857
Seaham Harbour		Red tide light, when practicable	●	..	..	1846
SUNDERLAND One bright, one red lt. on N. Pier, one bright tide light on S. Pier	54 55.1 1 21.6	Tide light from $\frac{1}{2}$ flood to $\frac{1}{2}$ ebb, a green light below it shows danger	3a 5a	73 58	14 4	1802 1857
TYNEMOUTH One br. rev. lt. 1 min.	55 1.1 1 24.9	A square white tower 79 ft. high, near Priory Ruins in the Castle	●	154	18	1802
Tyne Tide Lights	55 0. 1 26.	At N. Shields, from $\frac{1}{2}$ flood to $\frac{1}{2}$ ebb; in one W. by N., 240 yards apart	●	123 77	16 13	1808
Blyth, two bright Tide Lts.		While 8 ft. water; in one N. by W. $\frac{1}{4}$ W.	●	11	48	1783
COQUET ISLAND One bright fixed light	55 22. 1 32.	A red ray toward Haxley Pt. buoy, and red over the Boulmer Rocks	1a	83	14	1841
Warkworth red Tide Lt.		While 10 ft. water. On S. Pier	..	..	1	1848
FARN ISLAND Upper light rev. $\frac{1}{2}$ min., lower fixed	55 36.9 1 58.9	Two white towers in one N. by W. $\frac{1}{4}$ W., 187 yards apart ..	●	87 45	15 12	1776
LONGSTONE One br. rev. lt. $\frac{1}{2}$ min.	55 39. 1 37.	Red tower on the Rock	●	75	14	1826
BERWICK ON TWEED Upper br., lower red lt.	55 45.9 1 58.9	Low red lt. while 10 feet on Bar. On the Pier-head	●	44 28	11 8	..

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
Eyemouth		One <i>red</i> fixed light	..	..	..	1857
ST. ABB'S HEAD One bright fixed light	55 55. 2 8.	Building (1860)	1a	..	..	1860
DUNBAR <i>Old Harbour</i> — <i>Victoria Harbour</i>	56 0. 2 30.7	One fixed br. light at each, from July to October	..	..	..	1857
INCHKEITH One br. rev. lt. 1 min.	56 2. 3 8.	A white tower, 45 feet high	2b	220	18	1804
FISHERROW One fixed light		On the pier head; all night, ex- cept in moonlight	●	20	5	1839
Leith <i>Red</i> light on E. pier <i>White</i> light on W. pier	55 59. 3 10.	A <i>green</i> lt. under the <i>white</i> one on W. pier while 8 ft.; the <i>green</i> changed to <i>red</i> when Dock gates are open	5a	28	10	1829
Newhaven		One bright light on the pier	..	20	5	
GRANTON		One <i>red</i> light on pier head	..	33	6	1845
GRANGEMOUTH One fixed light		At the entrance of the River Carron	●	33	10	1847
INVERKEITHING		Two <i>red</i> lights on W. Quay	..	..	..	1856
Burntisland <i>East Pier</i> — <i>Ferry Pier</i> A fixed light on each	56 4. 3 14.	Also a small <i>red</i> lt. at Newhalls, and a <i>white</i> one at Queensferry, for passage boats only	..	13 28	8 ..	1845 1853
KIRKCALDY One fixed light	56 7. 3 9.	On E. pier head. <i>Red</i> to seaward; <i>white</i> when Harbour is open..	..	29	8	
Buckhaven		A <i>white</i> light on E. pier head ..	a	17	9	1854
ST. MONAN One <i>red</i> , and one br. lt.	56 12.5 3 46.3	One on pier head; the other on a house	..	20	..	1855
PITTENWEEN Three fixed <i>red</i> lights	56 13. 2 43.5	Two on pier head, and one on a building. Not lighted between May 15 and July 15. In bad weather a br. gas lt., 50 feet high, vis. 7 miles, is shown while 6 feet		25 72	6 6	1853
ANSTRUTHER One <i>red</i> and one <i>green</i> lt.	56 13.3 2 41.8	N.E. $\frac{1}{2}$ N. and S.W. $\frac{1}{2}$ S. from each other. Aug. to April ..	..	20	4	1848
CELLARDYKE One fixed <i>red</i> light		On a house, in W. of Harbour; only while boats are out				
ISLE OF MAY Two brilliant fixed lts.	56 11.1 2 33.3	On the summit of the island, N.E. side; N.N.E. $\frac{1}{2}$ E., and S.S.W. $\frac{1}{2}$ W., 750 feet apart	1a ●	240 110	21 15	1816 1844
BELL ROCK One rev. light, bright and <i>red</i> alternately, every 2 minutes	56 26.1 2 23.1	A tower, 117 feet high; on the Bell Rock, at 10 feet below high water. A bell is sounded every half minute in fogs	●	90	14	1811
ST. ANDREW'S Two fixed lights	56 20. 2 47.	On the pier head, and a turret in Cathedral wall	● 5a	30 100	6 5	1825 1849

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
BUDDONNESS or TAY Two brilliant fixed lts.	56 28.1 2 44.9	The lts. in one, N.N.W. $\frac{3}{4}$ W., and S.S.E. $\frac{3}{4}$ E., 374 yards apart, lead into the Tay	●	71 45	10 8	1820
PORT ON CRAIG Two fixed lights	56 27. 2 49.	Leading lts. up the Tay. W.N.W. Northerly, and S.S.E. South- erly, 1,700 yards apart. A bell in fogs	●	80 35	16 11	1820 1845
NEWPORT Two fixed lights	56 26. 2 57.	On the W. Ferry pier, N.N.E. and S.S.W., 63 yards apart ..	●	10 16	7 8	
DUNDER HARBOUR Two fixed red lights		On Mid. and E. piers, N.W. $\frac{3}{4}$ W., and S.E. $\frac{3}{4}$ E., 130 yards apart	●	10 12	7	1827
ARBROATH One red fixed light	56 33. 2 35.	On the N. pier, when vessels enter. An occasional <i>bright</i> <i>flash</i> is a warning to keep off.	●	24	8	1826
MONTROSE Two fixed red lights	56 42. 2 27.	On the N. side of entrance, N.W. by W. $\frac{1}{2}$ W., and S.E. by E. $\frac{1}{2}$ E., 303 yds. apart	●	60 35	10 11	1818
STONEHAVEN One br., one red fixed lt.	56 58. 2 12.	W. by N. $\frac{1}{2}$ N., and E. by S. $\frac{1}{2}$ S.; on the inner side of Harbour	●	18 24	6	1839
GIRDLENESS Two bright fixed lights	57 8.2 2 3.	In one tower	1a ●	185 115	19 16	1833
<i>Aberdeen</i> One bright fixed light Two red (or green) fixed lights	57 8.5 2 4.1	On N. pier head, from half flood to high water. When entrance is safe the two lts. are red: when ships cannot enter, green		40 47 30	8 3	1842
BUCHANNESS One flashing lt., 5 secs.	57 28.2 1 46.1	A stone tower, on the Ness	●	130	16	1827
PETERHEAD One br., and one red lt.	57 30. 1 46.	White on elbow of W. Pier in S. Harbour; and red, on W. Pier, in N. Harbour	a a	24 26	10 10	1834 1849
FRASERBURGH Two fixed red lights	57 41.5 2 0.	On pier head, and Middle Pier; S.E. by E., and N.W. by W., 228 ft. apart, from July to April	..	36	5	1841
KINNAIRD HEAD One bright fixed light	57 42. 2 1.	A stone tower, 76 feet high, on the Head	1a	120	15	1851
MACDUFF One red fixed light	57 40. 2 30.	On the W. pier head	●	25	6	1829
BANFF Two white, one red, lts.	57 40. 2 31.	One white light on N. pier head, and one high white lt., with lower red lt. in the upper part of the New Harbour	..	28	8	1851
<i>Elgin and Lossiemouth</i>		One green light on S. pier head..	..	30	..	1858
COVESEA SKERRIES One rev. lt. 1 min.	57 43.2 3 20.3	On Craig Head. It is red from S. E. by E. $\frac{1}{2}$ E., to S.E. $\frac{1}{2}$ S. The rest is bright	1b	160	18	1846

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
Eyemouth		One <i>red</i> fixed light	..	..	..	1857
ST. ABB'S HEAD One bright fixed light	55 55. 2 8.	Building (1860)	1a	..	..	1860
DUNBAR <i>Old Harbour</i> — <i>Victoria Harbour</i>	56 0. 2 30.7	One fixed br. light at each, from July to October	..	..	..	1857
INCHKEITH One br. rev. lt. 1 min.	56 2. 3 8.	A white tower, 45 feet high	2b	220	18	1804
FISHERROW One fixed light		On the pier head; all night, ex- cept in moonlight	●	20	5	1839
<i>Leith</i> <i>Red</i> light on E. pier <i>White</i> light on W. pier	55 59. 3 10.	A <i>green</i> lt. under the <i>white</i> one on W. pier while 8 ft.; the <i>green</i> changed to <i>red</i> when Dock gates are open	5a	28	10	1829
<i>Newhaven</i>		One bright light on the pier	..	20	5	
GRANTON		One <i>red</i> light on pier head	..	33	6	1845
GRANGEMOUTH One fixed light		At the entrance of the River Carron	●	33	10	1847
INVERKEITHING		Two <i>red</i> lights on W. Quay	..	..	..	1856
<i>Burntisland East Pier</i> — <i>Ferry Pier</i> A fixed light on each	56 4. 3 14.	Also a small <i>red</i> lt. at Newhalls, and a <i>white</i> one at Queensferry, for passage boats only	..	13 28	8 ..	1845 1853
KIRKCALDY One fixed light	56 7. 3 9.	On E. pier head. <i>Red</i> to seaward; <i>white</i> when Harbour is open..	..	29	8	
Buckhaven		A <i>white</i> light on E. pier head ..	a	17	9	1854
ST. MONAN One <i>red</i> , and one br. lt.	56 12.5 3 46.3	One on pier head; the other on a house	..	20	..	1855
PITTENWEEN Three fixed <i>red</i> lights	56 13. 2 43.5	Two on pier head, and one on a building. Not lighted between May 15 and July 15. In bad weather a br. gas lt., 50 feet high, vis. 7 miles, is shown while 6 feet		25 72	6 6	1853
ANSTRUTHER One <i>red</i> and one <i>green</i> lt.	56 13.3 2 41.8	N.E. $\frac{1}{2}$ N. and S.W. $\frac{1}{2}$ S. from each other. Aug. to April ..	..	20	4	1848
CELLARDYKE One fixed <i>red</i> light		On a house, in W. of Harbour; only while boats are out				
ISLE OF MAY Two brilliant fixed lts.	56 11.1 2 33.3	On the summit of the island, N.E. side; N.N.E. $\frac{1}{2}$ E., and S.S.W. $\frac{1}{2}$ W., 750 feet apart	1a ●	240 110	21 15	1816 1844
BELL ROCK One rev. light, bright and <i>red</i> alternately, every 2 minutes	56 26.1 2 23.1	A tower, 117 feet high; on the Bell Rock, at 10 feet below high water. A bell is sounded every half minute in fogs	●	90	14	1811
ST. ANDREW'S Two fixed lights	56 20. 2 47.	On the pier head, and a turret in Cathedral wall	● 5a	30 100	6 5	1825 1849

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
BUDDONNESS or TAY Two brilliant fixed lts.	56 28.1 2 44.9	The lts. in one, N.N.W. $\frac{3}{4}$ W., and S.S.E. $\frac{3}{4}$ E., 374 yards apart, lead into the Tay	●	71 45	10 8	1820
PORT ON CRAIG Two fixed lights	56 27. 2 49.	Leading lts. up the Tay. W.N.W. Northerly, and S.S.E. South- erly, 1,700 yards apart. A bell in fogs	●	80 35	16 11	1820 1845
NEWPORT Two fixed lights	56 26. 2 57.	On the W. Ferry pier, N.N.E. and S.S.W., 63 yards apart ..	●	10 16	7 8	
DUNDEE HARBOUR Two fixed red lights		On Mid. and E. piers, N.W. $\frac{3}{4}$ W., and S.E. $\frac{3}{4}$ E., 130 yards apart	●	10 12	7	1827
ARBRATH One red fixed light	56 33. 2 35.	On the N. pier, when vessels enter. An occasional <i>bright</i> <i>flash</i> is a warning to keep off.	●	24	8	1826
MONTROSE Two fixed red lights	56 42. 2 27.	On the N. side of entrance, N.W. by W. $\frac{1}{4}$ W., and S.E. by E. $\frac{1}{4}$ E., 303 yds. apart	●	60 35	10 11	1818
STONEHAVEN One br., one red fixed lt.	56 58. 2 12.	W. by N. $\frac{1}{4}$ N., and E. by S. $\frac{1}{4}$ S.; on the inner side of Harbour	●	18 24	6	1839
GIRDLENESS Two bright fixed lights	57 8.2 2 3.	In one tower	1a ●	185 115	19 16	1833
Aberdeen One bright fixed light Two red (or green) fixed lights	57 8.5 2 4.1	On N. pier head, from half flood to high water. When entrance is safe the two lts. are red: when ships cannot enter, <i>green</i>		40 47 30	8 3	1842
BUCHANNESS One flashing lt., 5 secs.	57 28.2 1 46.1	A stone tower, on the Ness	●	130	16	1827
PETERHEAD One br., and one red lt.	57 30. 1 46.	White on elbow of W. Pier in S. Harbour; and red, on W. Pier, in N. Harbour.....	a a	24 26	10 10	1834 1849
FRASERBURGH Two fixed red lights	57 41.5 2 0.	On pier head, and Middle Pier; S.E. by E., and N.W. by W., 228 ft. apart, from July to April	..	36	5	1841
KINNAIRD HEAD One bright fixed light	57 42. 2 1.	A stone tower, 76 feet high, on the Head	1a	120	15	1851
MACDUFF One red fixed light	57 40. 2 30.	On the W. pier head	●	25	6	1829
BANFF Two white, one red, lts.	57 40. 2 31.	One white light on N. pier head, and one high white lt., with lower red lt. in the upper part of the New Harbour	..	28	8	1851
Elgin and Lossiemouth		One green light on S. pier head..	..	30	..	1858
COVESEA SKERRIES One rev. lt. 1 min.	57 43.2 3 20.3	On Craig Head. It is red from S. E. by E. $\frac{1}{4}$ E., to S.E. $\frac{1}{4}$ S. The rest is bright	1b	160	18	1846

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
IRON ROCK or SGEIR MAOILE	55 52.5 5 50.	Proposed, on the Rock	..	..	..	1860
ISLAY. Sd. { RHU VAL One fixed <i>red</i> or <i>white</i> light	55 56.1 6 7.5	N. Point of Islay Island	2a	147	15	1859
{ M'ARTHUR'S HEAD	55 45.8 6 2.8	Building	..	..	..	1860
RHYNNS OF ISLAY One flash. lt., 5 secs.	55 40.3 6 30.	Oversay Island, off S. W. Point of Islay.....	●	150	17	1825
Port Ellen One fixed bright light	55 36. 6 12.	On Carraig Fadda Point, W. entrance	..	45	11	1853
MULL OF CANTYRE One fixed bright light	55 19. 5 49.	S.W. Headland of Cantyre	●	297	22	1787
SANDA ISLAND One fixed <i>red</i> light	55 16.5 5 34.9	On the Ship Rock	1a	165	15	1850
DAVAR ISLAND One br. rev. lt., $\frac{1}{2}$ min.	55 25.7 5 32.2	Stone tower, 65 feet high, on E. part	2b	120	17	1854
Campbellton		On Old pier head. <i>Red</i> , when bearing N.W.	..	18	2	
Ardrishaig		A fixed <i>white</i> light on Pier head	..	25	4	1850
PLADDA Two fixed bright lts.	55 26.0 5 7.1	One 52 ft. above the other. On Id. off S.E. Pt. of Arran Id...	.. ●	130 77	17 14	1790
CLYDE RIVER						
CUMBRAE One fixed bright lt.	55 43.3 4 58.	W. side of Little Cumbrae Id...	●	115	15	1793
TOWARD One br. rev. lt., 1 m.	55 51.7 4 59.2	On the Point	●	55	11	1812
CLOCH One fixed bright lt.	55 56.6 4 52.6	On the Point	●	76	..	1797
GREENOCK Two <i>red</i> , and 1 <i>white</i> light	55 57. 4 45.	The <i>red</i> lts., 1 mile N.N.W. of Custom House, 140 yds. apart, W.S.W. $\frac{1}{2}$ W., and E.N.E. $\frac{1}{2}$ E. The <i>white</i> light in front of Custom House.....		40 26	.. 4	1834 1829
Port Glasgow		One fixed <i>red</i> light on W. Quay	..	18	3	
CARDROSS One fixed <i>red</i> light		On the Pillar Bank	..	22	4	1849
Bowling Bay		Small lt. at Firth of Clyde Canal	..	12	2	1849
Donald's Quay		A <i>red</i> light, 200 feet from end ..	..	26	..	1849
Broomielaw		A Bude light	..	..	..	1844
Auchenlech		A <i>white</i> lt., $\frac{3}{4}$ m. above Pt. Glasgow	..	..	..	
Garmoyle Light		A floating lt., 3 miles above Pt. Glasgow	..	..	..	
Dickies Light		A <i>white</i> lt., 1 mile above Dum- barton	..	..	..	

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
Ardrossan	55 38.4 4 49.5	One <i>red</i> light on Breakwater ..	a	25	5	1856
Saltcoats	55 37.9 4 47.4	Bright bull's eye in <i>red</i> glass plate, on Pier	..	26	6	1840
TROON HARBOUR One br. revol. and 1 fixed <i>red</i> light	55 33. 4 41.	Revolves 40 secs. bright, 20 secs. hidden. N.E. $\frac{1}{4}$ N., and S.W. $\frac{1}{4}$ S., 350 yards apart		35 35	9 6	1827 1848
AYR HARBOUR Two white, 1 <i>red tide</i> , fixed lights	55 28.3 4 38.4	A <i>red</i> and a br. lt. in ono build- ing. S.E. by E. $\frac{1}{4}$ E., and N.W. by W. $\frac{1}{4}$ W., 283 yards apart. <i>Red</i> light while 8 feet on Bar		12 35 53	4 10	1790 1826
LOCH RYAN One fixed bright light	54 57.7 5 2.0	On Cairn Ryan Point	4a	46	10	1847
CORSEWALL One <i>red</i> and <i>white</i> rev. 2 min.	55 0.5 5 9.5	A white tower, 110 ft. high, on W. side of entrance to Loch Ryan	●	112	15	1817
Port Patrick One fixed bright light	54 50.3 5 7.0	S.E. angle of Harbour	..	37	8	1856
MULL of GALLOWAY One intermitting br. lt.	54 38.1 4 51.3	On S. Point. Visible, 2 $\frac{1}{2}$ min.; invisible, $\frac{1}{2}$ min.	●	325	23	1830
LITTLE ROSS One flash. light, 5 secs.	54 46. 4 5.	On the Island	1c	175	18	1843
SOUTHERNESS One fixed bright light	54 52.4 3 35.5	On the Point	..	50	11	1805
Annan River One fixed <i>white</i> light	54 57.7 3 16.	On Annan Foot, from half flood to half ebb	..	..	..	1841

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height, above H. W.	Visible in Miles.	Year established.
FASTNET One rev. light, 2 min.	51 23.3 9 86.4	On the summit of the Rock	1b	148	18	1854
KINSALE One bright or red light, and one bright light	51 41.8 8 15.2	The lt. on S. Point of Old Head is red over the Horse Rock, and br. to seaward. Br. lt. on Ft. Charles, E. side of Harbour ..	1a ●	236 98	21 14	1853 1804
CORK HARBOUR, or QUEENSTOWN						
ROCHE POINT One red or br. lt.	51 47.6 8 15.2	Red to Seaward; br. towards the Harbour. (Revolv. in 1861?).	●	92	4	1817
SPIT BANK One red light	51 50.7 8 16.4	Off Queenstown, on piles, in 9 ft. water, on E. elbow of Bank ..	4a	32	8	1853
MEELOUGH SPIT One red light		On piles, 100 ft. from the Channel	a	25	3	
BALLYCOTTIN Flashing light, 10 secs.	51 49.5 7 59.	On the Outer Island	1c	195	18	1850
YOUGHAL One bright light	51 56.5 7 50.5	On W. side of entrance.....	3a	78	6	1852
MINEHEAD Intern. light, 1 min.	51 59.5 7 35.1	On S. side of Head. Br. 50 secs.; suddenly dark, 10 secs.	1a	285	21	1850
DUNGARVAN Red, green, and br. lt.	52 4.4 7 33.1	On Ballinacourty Pt. Red over Carrickapane Rock; green, over Rocks from Ballinacourty Pt.; and bright in other directions	3a	52	10	1858
WATERFORD HOOK TOWER One bright light	52 7.4 6 55.9	E. side of entrance. Fog bells	●	152	16	1859
DUNMORE PIER HEAD One red light	52 9. 6 59.5	W. side of entrance. It is bright N. of Pier.....	..	..	..	
DUNCANNON FORT Two fixed lights	52 13.2 6 56.	In one tower. The lower is a tide light	●	53	10	1803
DUNCANNON N. One fixed light		Half mile N.N.E. $\frac{1}{2}$ E. of the Fort	●	128	16	1838
SALTEES LT. VESS. Two fixed bright lights	52 2.4 6 38.2	In 32 fathoms, off Coningbeg Rock	●	38 28	10	1824
TUSKAR Red and br. rev. light	52 12.1 6 12.3	A flash of 10 secs. every 2 min.; bright, br. and red alternately	●	101	15	1815
East Coast.						
BLACKWATERBANK LT. VESS. One fixed light	52 29.5 6 7.	In 19 fathoms, on N.E. part of Bank	●	33	9	1860
ARKLOW LT. VESS. One br. rev. lt., 1 min.	52 42. 6 0.	In 22 fathoms, on S. end of Bank	●	39	10	1860
WICKLOW Two fixed br. lights	52 57.8 6 0.1	In one, N.W. by W. $\frac{1}{2}$ W., 180 yards apart	●	250 121	21 16	1860 1818

Name and Character of Light.	Lat. N. Long. W. o	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
DUBLIN BAY						
KISH LT. VESS. Three bright lights	53 19. 5 56.3	In 10 fms., off N. of Kish Bank. The lts. are set triangularly ..	●	38 20	10	1811
Kingstown E. Pier One rev. lt., $\frac{1}{2}$ min.	53 18. 6 9.	White and red light alternately. A fog bell.....	●	41	9	1822
Kingstown W. Pier One fixed red light			●	36	2	1845
POOLBEG Two bright lights	53 20.5 6 9.3	At Mouth of R. Liffy. Lower lt. from half flood to half ebb ..	●	68	12	1768
BAILEY One bright light	53 21.7 6 3.3	On S.E. point of Howth Penins. A fog bell.....	●	134	15	1813
Howth E. Pier One red light	53 24. 6 4.	On Pier Head	●	43	11	1818
BALBRIGGAN One bright light	53 36.8 6 11.	On Pier, S. of entrance	●	42	10	1769
ROCKABILL One br. and red flash. lt.	53 35.7 6 0.5	Flash every 12 secs.; bright sea- ward, red to Westward	1b	148	18	1860
DROGHEDA Three fixed br. lights	52 43. 6 15.	On Sandhills, S. of R. Boyne. Changeable, as sandbanks shift	●	..	6	1842
DUNDALK One flash. lt., 15 secs.	53 58.7 6 18.	Red towards W. side of Dundalk Bay. White to seaward	4b	33	9	1855
CARLINGFORD HAULBOWLINE ROCK Two bright lights	54 1. 6 5.	In same tower. Lower lt. from half flood to half ebb. Fog bell	●	101	15	1823
GREENORE POINT		One revolving light, 45 secs.	●	29	9	1830
DUNDRUM BAY One intermit. red light	54 13.1 5 40.	On St. John's Pt. Red 45 secs., dark 15 secs.	1b	62	12	1844 1860
Ardglass Harbour		One fixed red light	●	18	6	1851
SOUTH ROCK One rev. br. lt., $1\frac{1}{2}$ m.	54 23.9 5 25.1	A white tower, 60 fset high, on the Rock	●	52	12	1797
Donaghadee Pier Head One red or br. fixed lt.	54 38.6 5 32.	Red to seaward; bright towards Harbour and Belfast Bay	●	56	12	1826
COPELAND One fixed bright light	54 41.7 5 32.	A white tower, 52 feet high, on Small Copeland Island	●	131	16	1796
BELFAST BAY One red lt., and others	54 39. 5 53.	Red lt. on Hollywood Bank; green lt. also on the Bank; 3 more green lts. towards Belfast; and a red lt. S.W. of Stone Beacon	5a ●	27	5	1848
Larne Lough		One bright light on Farres Point	●	42	11	1839
MAIDENS Two fixed bright lts.	54 55.8 5 45.	Towers white, with red belt. In one, N.W. by W., 640 yds. apart	●	94 84	14 13	1828
RATHLIN One interm., 1 fixed lt.	55 18.2 6 10.7	Upper lt. intermt., br. 50 secs.; dark 10 secs. Lower lt. fixed. Red lt. over Carrickvannan Rock	1b	243 182	21	1856

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
FASTNET One rev. light, 2 min.	51 23.3 9 86.4	On the summit of the Rock	1b	148	18	1854
KINSALE One bright or <i>red</i> light, and one bright light	51 41.8 8 15.2	The lt. on S. Point of Old Head is <i>red</i> over the Horse Rock, and br. to seaward. Br. lt. on Ft. Charles, E. side of Harbour ..	1a ●	236 98	21 14	1853 1804
CORK HARBOUR, or QUEENSTOWN						
ROCHE POINT One <i>red</i> or br. lt.	51 47.6 8 15.2	<i>Red</i> to Seaward; br. towards the Harbour. (Revolv. in 1861?).	●	92	4	1817
SPIT BANK One <i>red</i> light	51 50.7 8 16.4	Off Queenstown, on piles, in 9 ft. water, on E. elbow of Bank ..	4a	32	8	1853
MEELOUGH SPIT One <i>red</i> light		On piles, 100 ft. from the Channel	a	25	3	
BALLYCOTTIN Flashing light, 10 secs.	51 49.5 7 59.	On the Outer Island	1c	195	18	1850
YOUGHAL One bright light	51 56.5 7 50.5	On W. side of entrance	3a	78	6	1852
MINEHEAD Interm. light, 1 min.	51 59.5 7 35.1	On S. side of Head. Br. 50 secs.; suddenly dark, 10 secs.	1a	285	21	1850
DUNGARVAN <i>Red, green, and br. lt.</i>	52 4.4 7 33.1	On Ballinacourty Pt. <i>Red</i> over Carrickapane Rock; <i>green</i> , over Rocks from Ballinacourty Pt.; and bright in other directions	3a	52	10	1858
WATERFORD Hook Tower One bright light	52 7.4 6 55.9	E. side of entrance. Fog bells	●	152	16	1859
DUNMORE PIER HEAD One <i>red</i> light	52 9. 6 59.5	W. side of entrance. It is bright N. of Pier	..	..	..	
DUNCANNON FORT Two fixed lights	52 13.2 6 56.	In one tower. The lower is a <i>tide light</i>	●	53	10	1803
DUNCANNON N. One fixed light		Half mile N.N.E. $\frac{3}{4}$ E. of the Fort	●	128	16	1838
SALTEES LT. VESS. Two fixed bright lights	52 2.4 6 38.2	In 32 fathoms, off Coningbeg Rock	●	38 28	10	1824
TUSKAR <i>Red</i> and br. rev. light	52 12.1 6 12.3	A flash of 10 secs. every 2 min.; bright, br. and <i>red</i> alternately	●	101	15	1815
East Coast.						
BLACKWATER BANK LT. VESS. One light	52 29.5 6 7.	In 19 fathoms, on N.E. part of Bank	●	33	9	1860
ARKLOW LT. VESS. One br. rev. lt., 1 min.	52 42. 6 0.	In 22 fathoms, on S. end of Bank	●	39	10	1860
WICKLOW Two fixed br. lights	52 57.8 6 0.1	In one, N.W. by W. $\frac{3}{4}$ W., 180 yards apart	●	250 121	21 16	1860 1818

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
CLEW BAY CLARE ISLAND	53 49.5 9 59.	One fixed bright light on N. Point	●	341	27	1806
INISHGORT ISLAND	53 49.6 9 40.2	One fixed bright light	●	36	10	1827
SLYNE HEAD One rev. <i>red</i> and bright light, 2 min., and 1 fixed bright light	53 23.9 10 14.	N. light rev., with one <i>red</i> and two br. faces; the rev. and fixed lts. in one N. $\frac{1}{2}$ E. and S. $\frac{1}{4}$ W., 142 yards apart	●	126 115	15 14	1836
GALWAY BAY EERAGH ISLAND One rev. bright light	53 8.9 9 51.5	On W. Point. Bright flash every 3 min.	1b	115	16	1857
INISHEIR One bright or <i>red</i> lt.	53 2.7 9 31.5	<i>Red</i> in direction of Finnis Rock	1a	110	15	
Mutton Island One fixed bright lt.	53 15.2 9 3.1	On centre of Island, off Galway	..	33	10	1817
SHANNON, RIVER LOOPHEAD One fixed bright lt.	52 13.6 9 55.9	500 yards from extremity of Head	1a	277	22	1853
KILCRADAN One bright or <i>red</i> lt.	52 34.8 9 42.6	On the Point. <i>Red</i> to seaward; bright to River	●	133	16	1824
Tarbut One bright fixed lt.	52 35.5 9 21.8	On the Rock	●	58	13	1834
Beeves One bright or <i>red</i> lt.	52 39. 9 1.3	Red to N. of Rock	3a	40	10	1854
TRALEE One bright or <i>red</i> light	52 16.3 9 53.2	On Little Samphire Id. <i>Red</i> lt. seaward fr. W.N.W. to N. $\frac{1}{4}$ E.	4a	56	9	1850
VALENTIA One fixed bright light	51 56. 10 19.3	On Cromwell's Fort	●	54	12	1841
SKELLIGS Two fixed bright lights	51 46.2 10 32.7	On highest Rock, $7\frac{1}{2}$ miles from shore. One lt. will be discon- tinued when Calf R. is lighted	●	372 175	25 18	1826
CALF ROCK One light	51 34.2 10 15.	Building (1861).	..	..	..	
BANTRY BAY One fixed bright light	51 39.2 9 44.8	E. entrance to Bearhaven	●	55	12	1847
CROOKHAVEN One bright or <i>red</i> light	51 28.6 9 42.6	On Rock Island Pt. <i>Red</i> across Rocks to Shuk Head	●	67	13	1860

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
WHITE SEA.						
JJGINSK One fixed bright light	65 12.2 36 51.	On the N. height of Island	..	140	17	1842
MOUDIUGA One fixed bright light	64 55.5 40 16.	On a sandy Hillock on the Id., at entrance of R. Dvina	..	140	16	
MORJOVETS One fixed bright light	66 45.7 42 30.	540 yards in shore of N.W. Point of Island	..	150	14	1842
ORLOV One fixed bright light	67 11.2 41 20.5	N.E. Point of C. Orlov, 1,200 yards from Beach	..	222	17	1842
NORWAY.						
			West Coast.			
Hekkingen, Malang Fiord	69 36. 17 50.5	N. side of Hekking Id. From Aug. 15 to May 1	4a	66	14	1859
ANDENES One fixed and flash. lt.	69 19.5 16 9.	From Aug. 15 to May 1. Flash every 3 min.	2d	143	20	1859
Klopen, or Gloppe One fixed bright light	67 53.5 13 4.5	Sörvaagen, S. of entrance. From Sept. 1 to April 14.....	6a	134	11	1857
LOFOTEN ISLANDS						
Svinö One fixed red light	68 3. 13 34.5	Near Balstad. September 1 to April 14	●	196	11	1857
HENNINGSVÆR One fixed & flash. lt.	68 8.5 14 14.5	Quitverden. Flash every 3 min. August 15 to May 1	●	113	16	1857
Kjeöen, or Kie I., S. Point One fixed bright light	68 13.2 14 37.	Svolvær. September 1 to April 14	●	54	4	1856
Sjaaholmen One fixed bright light	68 9.5 14 41.5	Skraaven's Harbour. Sept. 1 to April 14	..	31	4	1856
Stamsund One fixed bright light	68 7.2 13 53.	Tornholm, S. Point. Sept. 1 to April 14	..	56	7	1859
Hammerfest One fixed bright light	70 40.2 23 40.	Extremity of Fuglenæs Island. Aug. 25 to April 20	6a	30	11	1859
Vaag, or N. Hellig Vær One fixed bright light	67 26. 14 1.7	N.E. Point of Island. Aug. 15 to May 1	5a	45	12	1859
PRÆSTÖ, Folden Fiord One fixed bright light	64 43.4 10 46.1	On the Islet. August 1 to May 16	6a	36	12	1841
VILLA One fixed and flash. lt.	64 32.7 10 41.7	On the Island. A flash every 4 min. August 1 to May 16	2d	127	20	1859
Munk Holm One fixed bright lt.	63 27.2 10 24.8	On the Fortress. August 1 to May 16	6a	44	10	1840
Agdenäs One fixed bright lt.	63 38.2 9 49.5	On the Point. August 1 to May 16	..	116	9	1831
Terningen One fixed bright light	63 29.6 9 9.	On the Island. August 1 to May 16	5a	100	12	1849

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
CLEW BAY CLARE ISLAND	53 49.5 9 59.	One fixed bright light on N. Point	●	341	27	1806
INISHGORT ISLAND	53 49.6 9 40.2	One fixed bright light	●	36	10	1827
SLYNE HEAD One rev. <i>red</i> and bright light, 2 min., and 1 fixed bright light	53 23.9 10 14.	N. light rev., with one <i>red</i> and two br. faces; the rev. and fixed lts. in one N. $\frac{1}{2}$ E. and S. $\frac{1}{2}$ W., 142 yards apart	●	126 116	15 14	1836
GALWAY BAY EERAGH ISLAND One rev. bright light	53 8.9 9 51.5	On W. Point. Bright flash every 3 min.	1b	115	16	1857
INISHBIR One bright or <i>red</i> lt.	53 2.7 9 31.5	<i>Red</i> in direction of Finnis Rock	1a	110	15	
Mutton Island One fixed bright lt.	53 15.2 9 3.1	On centre of Island, off Galway	..	33	10	1817
SHANNON, RIVER LOOPHEAD One fixed bright lt.	52 13.6 9 55.9	500 yards from extremity of Head	1a	277	22	1853
KILCRADAN One bright or <i>red</i> lt.	52 34.8 9 42.6	On the Point. <i>Red</i> to seaward; bright to River	●	133	16	1824
Tarbut One bright fixed lt.	52 35.5 9 21.8	On the Rock	●	58	13	1834
Beeves One bright or <i>red</i> lt.	52 39. 9 1.3	Red to N. of Rock	3a	40	10	1854
TRALEE One bright or <i>red</i> light	52 16.3 9 53.2	On Little Samphire Id. <i>Red</i> lt. seaward fr. W.N.W. to N. $\frac{1}{2}$ E.	4a	56	9	1850
VALENTIA One fixed bright light	51 56. 10 19.3	On Cromwell's Fort	●	54	12	1841
SKELLIGS Two fixed bright lights	51 46.2 10 32.7	On highest Rock, $7\frac{1}{2}$ miles from shore. One lt. will be discon- tinued when Calf R. is lighted	●	372 175	25 18	1826
CALF ROCK One light	51 34.2 10 15.	Building (1861).	..	..	..	
BANTRY BAY One fixed bright light	51 39.2 9 44.8	E. entrance to Bearhaven	●	55	12	1847
CROOKHAVEN One bright or <i>red</i> light	51 28.6 9 42.6	On Rock Island Pt. <i>Red</i> across Rocks to Shuk Head	●	67	13	1860

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
WHITE SEA.						
JJIGINSK One fixed bright light	65 12.2 36 51.	On the N. height of Island	..	140	17	1842
MOUDIUGA One fixed bright light	64 55.5 40 16.	On a sandy Hillock on the Id., at entrance of R. Dvina	..	140	16	
MORJOVETS One fixed bright light	66 45.7 42 30.	540 yards in shore of N.W. Point of Island	..	150	14	1842
ORLOV One fixed bright light	67 11.2 41 20.5	N.E. Point of C. Orlov, 1,200 yards from Beach	..	222	17	1842
NORWAY.						
			West Coast.			
Hekkingen. Malang Fiord	69 36. 17 50.5	N. side of Hekking Id. From Aug. 15 to May 1	4a	66	14	1859
ANDENÆS One fixed and flash. lt.	69 19.5 16 9.	From Aug. 15 to May 1. Flash every 3 min.	2d	143	20	1859
Kløpen, or Gløppen One fixed bright light	67 53.5 13 4.5	Sørvaagen, S. of entrance. From Sept. 1 to April 14.....	6a	134	11	1857
LOFOTEN ISLANDS						
Svinø One fixed red light	68 3. 13 34.5	Near Balstad. September 1 to April 14	●	196	11	1857
HENNINGSVÆR One fixed & flash. lt.	68 8.5 14 14.5	Quitverden. Flash every 3 min. August 15 to May 1	●	113	16	1857
Kjeßen, or Kie I., S. Point One fixed bright light	68 13.2 14 37.	Svolvær. September 1 to April 14	●	54	4	1856
Sjaaholmen One fixed bright light	68 9.5 14 41.5	Skraaven's Harbour. Sept. 1 to April 14	..	31	4	1856
Stamsund One fixed bright light	68 7.2 13 53.	Tornholm, S. Point. Sept. 1 to April 14	..	56	7	1859
Hammerfest One fixed bright light	70 40.2 23 40.	Extremity of Fuglenæs Island. Aug. 25 to April 20	6a	30	11	1859
Vaag, or N. Hellig Vær One fixed bright light	67 26. 14 1.7	N.E. Point of Island. Aug. 15 to May 1	5a	45	12	1859
PRÆSTØ, Folden Fiord One fixed bright light	64 43.4 10 46.1	On the Islet. August 1 to May 16	6a	36	12	1841
VILLA One fixed and flash. lt.	64 32.7 10 41.7	On the Island. A flash every 4 min. August 1 to May 16	2d	127	20	1859
Munk Holm One fixed bright lt.	63 27.2 10 24.8	On the Fortress. August 1 to May 16	6a	44	10	1810
Agdenås One fixed bright lt.	63 38.2 9 49.5	On the Point. August 1 to May 16	..	116	9	1831
Tørningen One fixed bright light	63 29.6 9 9.	On the Island. August 1 to May 16	5a	100	12	1849

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
TRONDHJEM One fixed bright light	63 18.7 8 13.4	On the Ringholm Rock, half mile from E. Pt. of Eddo. Aug. 1 to May 16	5a	51	14	1849
Leervig One fixed bright light	63 6.5 7 42.	On N. side of Island. Aug. 1 to May 16	..	..	..	1833
CHRISTIANSUND One fixed bright light	63 7.3 7 38.2	On Stavnaes, N.E. Point of Averö. Aug. 1 to May 16	5a	65	12	1842
QVITHOLM One fixed and flash. lt.	63 2.2 7 12.5	On N.W. Pt. of Id. A flash of 12 secs. every minute. Aug. 1 to May 16	2d	134	19	1842
Walderhoug One fixed bright light	62 30.1 6 7.4	On S. Pt. of Walderö. Aug. 1 to May 16	..	41	4	1860
LEPSO REEF LT. VESSEL One fixed bright light	62 35.5 6 14.5	In 3 fms. on S.E. part of Reef. Aug. 1 to May 16	..	25	4	1858
HOGSTEN One fixed and flash. lt.	62 28. 6 1.5	Flash every 3 min. On S.E. of Godö Id., Bred Sound. Aug. 1 to May 16	4d	41	12	
RONDÖ One fixed bright light	62 25. 5 35.1	W. Pt. of Id., Bred Sd., Aug. 1 to May 16	..	161	22	1858
HELLESÖ ISLAND One fixed and flash. lt.	60 45. 4 43.1	Flash 12 secs. every min.; at 8 m. dist. dark between flashes	2d	154	19	1855
SKJELLANGER One fixed bright light	60 36.5 4 57.3	N.W. side of Holzenö Id. July 15 to May 16	5a	58	13	1853
BERGEN One fixed bright light	60 24. 5 18.7	On Nordnaes Point. Aug. 15 to April 30	..	41	4	1839
Leeröen Island One fixed bright light	60 14. 5 11.	W. side of Island. July 15 to May 16	..	57	4	1855
Piir Holm One fixed bright light	60 5.2 5 12.3	Bagholm Sound. July 15 to May 16	..	..	4	1849
Öxhammer One fixed bright light	59 59.2 5 14.	E. side of Selbö. July 15 to May 16	..	..	4	1863
SLOTTERÖ, SELBÖ FIORD. One fixed bright lt.	59 54.5 5 5.	On the Island. South entrance	2a	152	18	1859
Folgeröen One fixed bright light	59 48. 5 20.	On Island at Stoksund. July 15 to May 16	..	51	4	1855
Midtholmen One fixed bright light	59 42. 5 24.7	Mosterhavn. July 15 to May 16	..	39	4	1855
Langevaad One fixed bright light	59 37. 5 16.	Lille Blegan. E. side of Bommelö Id. July 15 to May 16	..	16	3	1855
Espevär One fixed bright light	59 35.1 5 10.1	S. entrance of Harbour. Oct. 1 to April 1	..	..	4	1849
Ryvarden One fixed bright light	59 31.7 5 14.7	On Point leading into Bommel Fiord. July 15 to May 16 ..	..	..	4	1849

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
Gitterö One fixed bright light	59 26. 5 8.5	Removed from Gletta. Vis. from N. to S.W. $\frac{1}{2}$ W., by the E. ..		..	4	1860
SÄRHOUG One fixed bright light	59 25.2 5 15.5	On Rock at N. entrance	5a	72	12	1848
Höievarde One fixed bright light	59 19.5 5 20.3	E. side of Karmö	..	65	6	1868
UDSIRE Two fixed bright lights	59 19.6 4 51.1	W. side of Id. N.W. and S.E. 220 yards apart	2a	255	21	1844
Bukke Sund One fixed bright light	59 13.2 5 29.	E. side of Bukken Island. Oct. 1 to April 1	..	..	4	1849
Fieldø Island		One fixed br. lt. Oct. 1 to April 1	..	..	4	1849
Skude Ness Havn		One fixed br. lt. Oct. 1 to April 1	..	..	4	1849
Skude Ness One fixed bright light	59 9.2 5 17.	S.E. Point of Karmö. Oct. 1 to April 1	..	77	6	1840
Tunge Ness One fixed bright light	59 5 5 36.7	October 1 to March 31	..	25	6	1840
HVIDINGSÖ One fixed and flash. lt.	59 4. 5 23.1	Fixed lt. 2m. 55 secs.; then short eclipse; then br. flash 10 to 15 secs.; then eclipse. Only flashes seen 16 m. dist. Revs. in 4 m.	2d	149	21	1853
LILLE FEISTEEN One fixed red light	58 49.5 5 30.7	On the Island	4a	68	12	1859
EGERÖ						
GRUNDSUND HOLM One fixed br. light	58 27.8 5 53.1	On N.W. Point	5a	43	11	1855
W. POINT OF ISLAND One fixed br. light	58 26. 5 52.2		1a	154	24	1854
VIBBERODDEN One fixed br. light	58 25.3 5 59.6	S.E. Point of Vibber Odde	5a	73	12	1855
VARNÄS One fixed bright light	58 10.6 6 37.3	S. Point of entrance to Lister Fiord	..	90	12	1836
LISTER Three fixed br. lights	58 6.5 6 34.2	Three white towers built in a triangle, on W. Pt. of Lister Land	2a	130	19	1853
NAZE OF NORWAY or LINDESNÆS One fixed & flash. lt.	57 59. 7 3.	White and red tower, 33 ft. high, on the Cape. Flash of 12 secs. every minute	1d	164	24	1853
ODDERÖ ISLAND One fixed red light	58 8.2 8 0.5	In Christiansand Fiord, on S.W. Point of Island	..	27	10	1832
OXÖ ISLAND One fixed bright light	58 4.4 8 3.6	Round white tower on S. of Id., entrance of Christiansand Fiord	2a	139	19	1853
ÄRENDALE One fixed bright light	58 26.3 8 47.4	Yellow building on Sandvig Pt., W. side of Channel	6a	43	11	1844

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
TORUNGEN IDS. Two fixed bright lights	58 24.1 8 47.7	On Outer Torungen, and Inner Torungen, N.N.E. 1,200 yds. apart	2a	134	20	1844
Stangholms Island One fixed <i>red</i> light	58 42.7 9 15.	Yellow building on E. Point ..	5a	34	10	1855
JOMFRULAND One fixed and flash. lt.	58 52.2 9 86.3	White tower, 86 ft. high, on a low Island. Flash every $\frac{1}{2}$ min. Dark between flashes at 8 m.	2d	134	20	1839
LANGÖTANGEN One fixed bright light	58 59.7 9 45.8	Yellow tower on S. Point of Langö Island	6a	41	11	1839
Frederiksværn One fixed <i>green</i> light	58 59.5 10 4.5	Staværnsö, S. Pt., E. side of Channel. July 15 to June 1	..	101	8	1855
CHRISTIANIA FIORD.						
FÆRDER One fixed bright lt.	59 2. 10 32.1	Red tower, 134 ft. high, with white belt, on Lit. Færder. Fog bell	1a	154	24	1857
TORGAUTEN ISLAND One fixed bright lt.	59 9.5 10 50.3	On S. Point	..	37	12	1859
FULEHUK ISLAND One fixed & flash. lt.	59 11. 10 36.7	White tower, 41 feet high. Flash every 3 minutes	4d	57	14	1850
Torgersö Island One fixed bright lt.	59 15.5 10 30.9	On N.W. Point. July 15 to June 1	..	10	3	1851
Moss Havn One fixed <i>red</i> light	59 26.4 10 39.8	E. side of Canal. October 1 to March 31	..	10	3	1857
BASTÖ ISLAND One fixed bright lt.	59 23.3 10 33.	Yellow building on N. E. Point	6a	38	12	1848
Röd Point One fixed bright lt.	59 31.9 10 26.3	E. side of entrance to Drams Fiord. July 15 to May 31 ..	..	35	6	1840
Filtvedt One fixed bright lt.	59 34.7 10 37.7	On W. shore. July 15 to May 31	..	24	6	1840
Steilene Island		One fixed light. July 31 to May 31	6a	22	6	1837
Heg Holm		One fixed light on N. Pt. July 15 to May 15	6a	23	4	1826

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
SWEDEN.						
KOSTER One fixed and flash. lt. One fixed bright light	58 14.2 11 0.	N. and S., 78 yards apart. Flash in 7 secs.	..	214	15	1850
HÄLLÖ One fixed and flash. lt.	58 20.5 11 13.	White tower, at entrance of Aby Fiord. 9 flashes in 6 min.	..	119	16	
THE KATTEGAT.						
MARSTRAND One rev. br. lt., 2 min.	57 53.5 11 35.	On Tower of Karlsten Fort	..	232	22	1836
WINGA, or VINGA ID. One fixed and flash. lt. One fixed bright light	57 38. 11 36.	N.E. $\frac{1}{2}$ N., and S.W. $\frac{1}{2}$ S., 138 yards apart. Rapid flashes ..	..	81	15	1854
BUSKÄR ISLET One bright or red light	57 38.3 11 40.	At a distance br., but red when near. Aug. 15 to April 15 ..	..	82	10	1841
BÖTTÖ One fixed bright light	57 39. 11 43.	On a house; in Winga Sound. Aug. 15 to April 15 ..	..	45	10	1841
NIDINGEN ROCK Two fixed bright lts.	57 18.5 11 53.5	Stone towers, E.N.E. and W. S.W., 53 yards apart. Fog bell in a steeple ..	..	66	12	1832
MORUP TÄNGE PT. One fixed bright light	56 55. 12 22.	White tower, 70 feet high, on the Point ..	..	95	15	1843
KULLEN One rev. bright light	56 18.2 12 27.	White tower, on hill-side. Br. 30 secs., dark $1\frac{1}{2}$ min.	..	238	20	1843
Helsingborg One fixed bright light	56 3. 12 42.	Stone tower, 23 feet high, on N. Pier Head ..	..	27	7	
Helsingör, or Elsinore One fixed bright light	56 2.1 12 37.5	On S. Pier ..	..	17	7	1830
NAKKE HEAD Two fixed bright lights	56 7.2 12 20.8	On N.E. Point of Siælland, W. N.W. & E.S.E., 438 yds. apart	..	147 98	12 8	1772
HIELM ISLAND One fixed and flash. lt.	56 8. 10 48.5	Flash every fourth min.	..	164	18	1856
SPOTSBIERG One fixed bright light	55 58.6 11 51.6	On E. side of entrance to Ise Fiord.	..	123	10	1845
HESSELÖ ISLAND One rev. br. lt., 1 min.	56 11.8 11 42.8	Strong lt., 11 secs.; weaker, 19 secs.; invisible, 11 secs.; then weak light, 19 secs.	..	87	14	1841
FORNESS One rev. br. lt., $\frac{1}{2}$ min.	56 26.7 10 57.5	$2\frac{1}{2}$ miles N.E. $\frac{1}{2}$ E. of Greenaa Haven ..	..	69	13	1839
ANHOLT LIGHT VESSEL One rev. br. lt., 25 secs.	56 45.7 11 50.8	In 16 fathoms, 1 mile E. of Knob Reefs. March to December ..	..	26	9	1842

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
ANHOLT ISLAND One rev. br. lt., 25 secs.	56 44.2 11 39.2	E. Point. A light is shown 57 ft. lower when Lt. Vessel is not in her station	..	122	14	1852
KØBBERGROUND LT. VES. Three fixed bright lts.	57 8.5 11 20.5	In 4 fms., S.E. by S., from Nyvager. Lights triangular....	..	41 29	8 ..	1853
Hals, N. Pier One fixed bright light	57 0. 10 19.	Entrance of Liim Fiord.....	..	32	10	1846
LÆSO CHAN. LT. VESSEL One fixed bright light	57 12.7 10 41.6	In 10 fathoms, E. of Dvale Ground.....	..	30	9	1852
TRINDELEN LT. VESSEL One fixed bright light	57 25.6 11 16.6	Red, with white cross; a red ball at the fore. Bell in fogs	●	31	9	1829
Frederikshavn One fixed bright light	57 26.2 10 32.9	On S. Pier Head.....	..	23	8	1134
HIRTSHOLM One rev. br. light, $\frac{1}{2}$ m.	57 29.2 10 27.4	White tower, quadrangular	..	43	10	1838
Aalbek		Two fishermen's lights	..	12	5	1846
SKAGEN, or SCAW One fixed bright light	57 44.1 10 37.9	Ice signals shown	1a	144	15	1564 1858

THE SOUND.

Landskrona One fixed bright light	55 52. 12 50.	N. side of Harbour.....	..	..	..	
KRONBORG One fixed bright light	56 2.4 12 37.6	On N.E. tower of Castle	..	110	15	1843
COPENHAGEN One fixed and flash. lt.	55 42.2 12 37.	Flash every 3 min., E. side of Trekroner Battery	4d	41	11	1858
DRAGØR, or DROGDEN, LT. VESSEL One fixed bright lt.	55 33.2 12 43.3	200 yds. S.W. by S. of Quartus Ground, in 4 $\frac{1}{2}$ fathoms. March 1 to December 31	..	25	9	1838
MALMO One fixed bright light	55 36.7 13 1.	Tower, on W. Pier Head	..	..	..	
FALSTERBO One fixed bright light	55 23.7 12 49.8	Stone tower, 68 feet high, within the Reef. Aug. 1 to May 15	..	78	13	1843
FALSTERBO LT. VESSEL Two fixed bright lts.	55 17. 12 48.	In 5 fathoms, at extreme Point of Reef	..	49	6	1844
Kjöge Pier Two fixed bright lts.	55 27.1 12 11.5		..	39 33	6	1842
STEVNS CAPE One rev. br. lt., $\frac{1}{2}$ min.	55 17.4 12 27.5	1,506 yards N.E. of Høierop Church	..	144	16	1818
MØEN ISLAND One fixed bright light	54 56.8 12 32.7	S.E. Point	..	82	12	1845
GIEDSER POINT One fixed bright light	54 33.8 11 58.	$\frac{1}{2}$ mile inland of S. Point of Falster Island	3a	66	12	1851

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
GREAT BELT.						
SEIRÖ One rev. br. lt., 2 min.	55 55.2 11 5.1	Tower, 52 feet high, on N.W. Point of Island	..	103	15	1852
REEF NESS One fixed bright light	55 44.6 10 53.4	On extreme Point	..	65	13	1844
Kallundborg One fixed bright light	55 41.2 11 5.8	On the Pier	..	25	9	1835
HALSKOV One fixed bright light	55 20.3 11 7.7	Near Korsør. A second light is shown occasionally. Aug. 1 to May 15	..	52	10	1727
KORSØR Two fixed bright lights	50 20.2 11 8.5	N. side of Harbour	4a	26 17	8	1846
SPRØGØ One rev. br. lt., 15 secs.	55 19.9 10 58.4	On highest part of Island	..	60	12	1750
KNUDS HEAD One fixed red light	55 17.4 10 51.3	May 15 to July 31	..	60	10	1750
SLIPSHAVN One fixed red light	55 17.1 10 49.7	On Slips Point Battery, Nyborg Fiord	..	20	8	1845
Nyborg Harbour Two fixed bright lights	55 18.8 10 48.	On Pier Head, when the Mail is expected	..	18 6	4	
AGERSØ One fixed red light	55 11.1 11 12.7	S. Point of Helleholm, Omø Sound	..	25	8	1846
VÆIRØ One rev. br. lt., $\frac{1}{2}$ min.	55 2.3 11 22.3	On N.E. Point of Island	..	51	10	1845
TAARS Two fixed bright lts.	54 52.7 11 2.3	On N.W. Point of Laaland; E. $\frac{1}{2}$ S., 663 yards apart	6a	32 18	8 5	1857
Svendborg One fixed bright light	55 3. 10 39.	On the Pier, October to March	..	14	6	1854
LITTLE BELT.						
AARHUUS One fixed bright light	56 9.3 10 13.5	On S. end of Mole. Red light also on N. Pier	..	34	10	1846
THUNÖ. One fixed bright light	55 57. 10 26.8	On Church Tower, S.E. of Island	..	100	11	1846
SAMSO ISLAND One fixed and flash. lt.	55 46.3 10 33.4	S.W. Point. Flash every third minute	3d	118	15	1853
Fredericia One fixed bright light	55 33.6 9 45.7	On N. Mole	..	28	4	1842
Middelfort		Lt. on Pier Head, on dark nights	..	..	..	
BAAGØ ISLAND One fixed bright light	55 17.7 9 48.	On S.W. Point	..	39	10	1842
Assens One fixed bright light	55 16.3 9 53.7	On Pier Head	..	20	5	1854

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
Aarø Island		A Lantern, on S. end, occasionally	..	..	..	
Aarø One fixed bright light	55 15.7 9 42.9	On S. Mole. November to May	..	26	6	1777
Apenrade One fixed red light	55 2.5 9 26.	On S. Mole. From Sept. 15 to April 1, till 1 a.m.	..	16	5	
ALS One fixed bright light	54 51.3 9 59.3	Keke Ness, S.E. Point of Alsen Island	..	78	12	1845
Eckenförde One fixed bright light	54 28.3 9 50.3	On Pier Head	..	..	..	
BULK One fixed bright light	54 27.4 10 11.9	W. Point of entrance to Kiel Bay	..	55	12	1815
FRIEDRICHSORT Two fixed bright lights	54 23.5 10 11.3	On Fortress, W. side of Kiel Bay. E.S.E., 250 yards apart	..	33	9	1815 1853
Düsternbrook One fixed red light	54 21. 10 9.	On iron tower, at the bathing place	..	16	6	1854
MARIEN One rev. br. lt., $\frac{1}{2}$ min.	54 29.6 11 14.5	N.E. Point of Femern Island ..	..	94	14	1832
FAKKEBIERG One fixed bright light	54 44.4 10 42.2	On a hill, 1 mile N. of S. Point of Langeland	..	128	14	1806
NEUSTADT One rev. br. lt., 2 min.	54 5.3 10 51.8	2 miles S.E. by E. of entrance to Neustadt, on Pelzer Point....	..	47	10	1842

SWEDEN.

Baltic, W. Shore.

Ystad Harbour One red and bright lt.	55 25.5 13 50.	Red light on W. Pier Head. N.E. by N., and S.W. by S., 48 yards apart	..	20 51	4 10	1847
ULKLIPPOR ROCKS One rev. br. lt., 2 min.	55 57. 15 43.	Stone tower, on the Rocks	..	50	11	1340
Grimakär One fixed bright light	56 39.3 16 23.3	On Pilot's house. Sept. 15 to April 15	..	41	6	1837
ÖLAND ISLAND						
S. POINT OF ISLAND. One fixed bright lt.	56 11.8 16 24.5	White stone tower, 116 ft. high, on the Point	..	133	17	1785
BIÖRNHABEN ROCK One fixed bright lt.	57 22. 17 6.5	Off N.W. Point of Island	..	103	12	1845
GOTTLAND						
HOBURG HILL One rev. br. lt., $1\frac{1}{2}$ m.	56 55. 18 8.4	S. W. Point of Island	..	166	16	1846
ÖSTERGARN ISLAND One fixed bright lt.	57 26.5 19 0.	Tower, 66 feet high	3a	101	14	1817 1849
FARÖ ISLAND One rev. br. lt., $1\frac{1}{2}$ m.	57 57.4 19 23.3	Tower, 80 feet high, on Holm Pt. Very brilliant for 20 secs.	..	100	14	

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
GOTTSKA SANDÖ ID. Two fixed bright lights	58 23.2 19 12.7	On N. part of Island. N. 5° W., and S. 5° E., 260 yards apart	3a	140	16	
LANDSORT ISLAND One rev. br. lt., 2 min.	58 44.5 17 52.7	Stone tower, 85 feet high, on S. Point of Island	..	144	18	1660 1840
KORSÖ ISLET One rev. br. lt., 4 min.	59 17.2 18 58.3	Alternate flashes and darkness..	..	151	17	1768
GRÖNSKÄR ROCK One fixed light	59 17.3 19 3.	Coal fire on tower, 58 feet high	..	111	15	1786
SÖDERARM One rev. br. light, 2 m.	59 45.4 19 28.	White tower, 66 feet high, on Tollskar. Intervals of darkness	..	99	14	1839
NÄSKUBBEN ROCK One fixed bright light	59 52.7 19 5.5	Off Björkö	..	21	9	1850
Grissel Hamn		Light occasionally on Beach ..	..	..	..	
SVARTKLUB ROCK One rev. bright light	60 10.3 18 50.	In the S. Quarken. White tower, 54 feet high, on the Rock	..	68	13	1819 1842
UNDERSTEN ROCK One fixed bright light	60 16.3 18 55.3	In the S. Quarken. Tower, with bands, 35 ft. high, on the Rock	..	78	12	1848
DIURSDEN One fixed bright light	60 22. 18 24.3	White tower, 52 ft. high, on W. Pt. of Gräsö Id., in Öre Grd. B.	..	65	12	1830
ÖRSKÄR ISLAND One rev. br. lt., 1 min.	60 31.5 18 22.2	White tower, 110 feet high, on the Island	..	118	16	1739

GULF OF BOTHENIA.

Eggreground	60 43.4 17 32.	Light, on roof of a house	..	62	9	1838
BIÖRN ROCK Two fixed bright lts.	60 37.7 17 59.5	One on tower, the other on Keeper's house	..	42	11	1859
BÖNAN One fixed bright light	60 43.9 17 18.7	Near the Custom House	..	62	6	1840
STOR JUNGFRUN One fixed bright light	61 9.9 17 21.	Tower, 56 feet high, on E. side of Island	..	86	14	1838 1853
BRÄMÖ ISLAND One fixed bright light	62 13.3 17 37.	N.E. Point of Island	2a	101	17	1859
HOLMÖ GADD One fixed bright light	63 35.8 20 47.5	Tower, on Holmö, S. Gadd Rocks. Strong light to S.S.W. $\frac{1}{2}$ W.	..	70	12	1828
UMEA One rev. br. lt., 2 min.	63 47.8 21 1.	In the N. Quarken; on Fjäder- äggå Great Rock	..	101	15	1851
BIURÖ One fixed bright light	64 29.2 21 35.7	On the Head	2a	171	18	1859
HAPARANDA AND TORNEA One fixed bright light	65 31.7 23 36.	On Malören Rock	..	78	10	1851
NORR-SKAREN One rev. br. lt., 1 min.	63 14.1 20 37.7	On W. Islet	..	103	12	1848
ÖSTRA FINNBRUND Lt. V. One fixed bright light	60 55.5 18 26.	$1\frac{1}{2}$ mile S.E. of shallowest part ..	..	..	10	1859
ENSKÄR ISLAND One fixed bright light	60 43. 21 1.	Tower, 120 feet high, on the Id., 9 miles N.W. of Lönartan, ...	..	152	14	
LAGSKÄR One fixed bright light	59 50.8 19 55.8	Tower, 82 feet high, on N. Point	●	101	14	1859

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
OUTO or UTÖ One fixed bright light	59 46. 21 22.2	Gray tower, 93 feet high, on middle of Island	●	130	13	
HANGÖ Onerevolvinglt. 1 min., flashes unequal	59 46. 22 57.2	Wooden tower red, 71 ft. high, on S. Point of Id., 3 miles S. $\frac{1}{2}$ W. of Hangö Head	●	101	12	
RENSKAR One fixed bright light	59 56.2 24 24.7	Granite tower, 58 ft. high on the Scar, 1 $\frac{1}{2}$ miles S. $\frac{1}{2}$ W. of Por- kala Point	..	172	15	
GLOSHOLM One rev. bright light	60 11.2 25 51.4	On Id. S. of Pellinge. Br. 20 secs., dark 40 secs. May 28 to July 13	..	120	12	1836
KALBADEN-GRUND LT. V. One fixed bright light	59 58.5 25 36.5	S. side. Ball at Mast Head....	..	..	..	1858
South Shore.						
NEVA LIGHT VESSEL One fixed bright light	59 55.3 30 10.6	Entrance of Ship Channel to Pe- tersburg. May 28 to July 13	..	57	6	1858
YELAGUIN LIGHT VESSEL One fixed bright light	59 58.3 30 1.5	Entrance of N. Channel to Pe- tersburg. May 28 to July 13	..	16	5	
Peterhof Two fixed bright lights	59 53.5 29 56.7	Two Pillars on end of Pier. May 28 to July 13	..	34	6	
Oranienbaum One fixed bright light	59 55.9 29 47.7	W. Pier. May 28 to July 13. Fog bell	..	45	6	
Friderikstadt One fixed bright light	59 58.2 29 48.4	Angle of Kronstadt Harbour. May 28 to July 13. Fog bell	..	38	6	
KRONSTADT Merchant's Gate One fixed br. light	59 58.9 29 46.6	Mole Head. May 28 to July 13	..	24	5	
One fixed red and one bright light		Bright lt. on S. Bastion of Ni- cholas Battery. Red light on Kronslott, W. Rampart. May 28 to July 13		58 23	12 8	1857
TOLBOUKIN One fixed bright light	60 2.6 29 33.8	White tower, 88 feet high, on an Islet, W. of Kronstadt Island. May 28 to July 13	..	95	11	1832
LONDON SHOALS LT. VES. Three bright fixed lts.	60 0. 29 31.	Set triangularly. May 28 to July 13		41 28	7 6	1858
NARVA One fixed bright light	59 28.1 28 3.7	White tower, 67 feet high, at S. Point of entrance to River. May 28 to July 13	..	70	9	
SESKÄR One fixed and flash. lt.	60 0.1 28 23.	Brighter flash every half minute, with short eclipses	2d	97	14	1858
SOMMARS One fixed bright light	60 12.2 27 39.8	On W. Hill of Island. May 28 to July 13	..	85	10	

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
HOGLAND Two fixed bright lights	60 5.7 26 58.4	On N. Point of Id., and on adjacent Hill. N. by E. $\frac{1}{2}$ E., and S. by W. $\frac{1}{2}$ W., 1,250 yards apart. May 28 to July 13 ..	..	388 37	22 6	
RÖDSKÄR One rev. br. lt., 1 min.	59 58.1 26 41.1	Black wooden building, 62 feet high, on Id. May 28 to July 13	..	74	9	
KALK-GROUND Lt. Ves. One fixed red light	59 42. 26 6.	May 28 to Oct. 15. Yellow flag, and red and white balls.....	..	..	..	1858
EKHOLM One fixed bright light	59 41.1 25 49.	Red stone tower, 72 ft. high, on N. Pt. of Id. May 28 to July 13	..	101	14	1851
KOKSKÄR One fixed bright light	59 41.7 25 1.5	Tower, 97 feet high, on the Rock	2a	100	15	1858
REVEL, or KATERINDAL						
PORT MILITAIRE Two red and 2 br. lts.		Bright light at E. Pass, end of Mole; red lt. at S. Pass; br. lt. at W. Pass, end of Mole; red lt. at S. Pass. All on the wall			3 3 3 3	1859
MOUNT LAKSBERG Two fixed bright lts.	59 26.3 24 49.2	One near Marine Barracks; the other behind Katerindal. S. by E. and N. by W., 1,167 yards apart. May 28 to July 13 ..		178 268	15 19	 1859
REVELSTEIN Lt. VESSEL Two fixed bright lts.	59 43.3 24 44.	N. side. May 28 to Nov. 1. Yellow flag; bell in fogs	..	..	..	1858
NARGEN One rev. br. lt., 1 min.	59 36.4 24 31.9	Gray tower, 124 ft. high, on N. of Id. Vis. 10 secs., dark 50 secs. May 28 to July 13	..	136	13	1828
SOUROP Two fixed bright lights	59 27.9 24 24.1	On N. Cliff of Cape, and 1 $\frac{1}{2}$ min. E. of Old Tower. In one, E. by N. $\frac{1}{2}$ N.		135 28	13 10	 1859
PAKER ORT One fixed bright light	59 30.5 24 2.	Stone tower, 75 feet high, on Cape. May 28 to July 13....	..	..	14	
ODENSHOLM One fixed bright light	59 18.3 23 22.2	Red tower, 81 feet high, on N.W. of Id. May 28 to July 13 ..	..	102	16	1852
DAGER ORT One fixed and flash. lt., 1 min.	58 55. 22 15.2	White tower, 110 feet high, on a hill, 5 miles inland of W. Point of Dagö Id. May 28 to July 13	1d	328	21	1860
GULF OF RIGA						
Pernau Two fixed lights	58 23. 24 30.	Two Lanterns, near S. entrance. May 28 to July 13	..	..	..	1853
RIGA Two fixed bright lts.	57 3.9 24 1.	In same tower, on Dvinaminde Fort, Mouth of Dvina. May 28 to July 13	..	95 90	11 6	1818
RUNÖ One fixed bright light	57 48.1 23 15.5	Yellow building, 102 ft. high, on S.E. of Id. May 28 to July 13	●	200	16	1860

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
DOME NESS LT. VESSEL One rev. bright light		933 yards from Reef. May 28 to July 13	..	..	..	1858
DOME NESS Two fixed bright lights	57 45.6 22 37.5	On extremity of Ness. S.S.W. $\frac{1}{2}$ W., 106 yards apart. May 28 to July 13	..	86 79	8 10	
FILSAND ISLAND One rev. br. lt., 3 min.	58 23. 21 49.9	On W. Point. Br. 2 min., dark 1 min. May 28 to July 13 ..	●	127	13	1824 1860
SWALFER ORT One rev. bright light	57 54.6 22 4.5	White tower, 114 ft. high, on S. Pt. of Osel Id. May 28 to July 13	●	120	12	1838 1860
LYSER ORT One fixed bright light	57 34.2 21 44.1	White tower, 120 ft. high, 1,100 yards in shore. May 28 to July 13	2a	127	13	1845 1860
MEMEL One fixed bright light	55 43.7 21 6.2	N.E. side of entrance. Aug. 1 to May 15	..	98	20	1818
BRÜSTER ORT One rev. br. lt., 4 min.	54 57.7 19 59.2	On the Cape	2b	143.	20	1841
PILLAU One fixed bright light	54 38.3 19 54.2	Round tower, 88 feet high, S.E. of town. Aug. 1 to May 15..	..	92	20	1841
DANZIG Two fixed bright lights	54 24.3 18 40.2	On Neufahrwasser Tower and E. Mole, N. & S., 1,647 yds. apart	..	75 61	14 10	1341 1839
HELA One rev. br. lt., $\frac{1}{2}$ min.	54 36.1 18 49.3	Four cables, N.E. $\frac{1}{2}$ E., from Point.....	..	120	16	1840
RIXHÖFT One fixed bright light	50 50. 18 20.7	N. Point of Prussian Pome- rania	..	220	22	1840
IERSHOFT One rev. br. lt., 2 min.	54 32.7 16 33.	Stone Building, 98 feet high, near the village. Bright, 70 secs.; dark, 60 secs.	..	160	18	1838
SWINEMÜNDE One fixed bright light One fixed red light	53 55. 14 17.6	Port of Stettin, Oder R. Br. lt. on E. side of Harb. 1 mile S. of red lt. on E. Mole Head ..	1a ..	211 39	21 10	1855 1857
GREIFSWALD One rev. br. and red lt., $1\frac{1}{2}$ min.	54 14.7 13 55.4	On N.E. part of Island	..	154	17	1840
ARKONA One fixed bright light	54 41. 13 26.2	On Wittow Peninsula	..	200	22	1828 1851
DARS POINT One rev. & 1 fixed br. lt.	54 28.9 12 31.	High light, revolves every min.	2b ..	108 41	16 12	1848
WARNEMÜNDE One fixed bright light	54 10.5 12 5.7	W. side of entrance. Aug. 1 to April 30. (<i>Tide signals.</i>)	..	58	12	1836
TRAVEMÜNDE Two fixed bright lights	53 59. 10 53.	N. Point of River, 1 mile below Travemünde	..	100 68	16 6	1827
BORNHOLM CHRISTIANSD., OR ERTHOLMS One rev. br. lt., 20 s.	55 19.3 15 11.6	On Round Tower of fortress....	..	94	14	1805
HAMMAR POINT One fixed bright lt.	55 17.4 14 47.3	On Steilbiorg, near N. Point of Island	..	279	14	1802
Rönne Harbour Two fixed bright lts.	55. 5.8 14 42.5	In the Harbour	..	52 29	8	1848

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
SKAGEN, or SCAW One fixed bright light	57 44.1 10 37.9	Ice signals shown. Red ball on the Old Lt. H. if the Læsø Lt. Vessel is not at her station ..	1a	144	15	1858
HANSTHOLM One rev. br. lt. $\frac{1}{2}$ min.	57 6.8 8 36.2	N.W. Point of Jutland	..	218	18	1843
AGGER CHAN. LT. VESSEL One fixed bright light	56 45.5 8 10.5	Within the Channel. Nov. 15 to March 20	6a	30	10	1860
SYLT Two fixed lights One fixed and flash. light	55 3.5 8 24.	Two fixed lts. (the Western <i>red- ish</i>) on List or N. end of Id. S.E. by E. $\frac{1}{2}$ E., 2,910 yards apart. The fixed lt. will flash every 4 m., in village of Kamp, and changes to <i>red</i> when over the Bar	4a	63 72 205	10 13 20	1852
Dagebüll Two fixed bright lts.	54 43.7 8 41.3	On the Dyke	..	..	5	1854
Föhr Island Two fixed bright lts.	54 41.5 8 34.3	Wyk Harbour. In one lead in ..	..	..	5	1852
AMRUM ISLAND. One rev. br. lt., $\frac{1}{2}$ min.	54 38.5 8 22.5	On the Island	..	140	14	1853
EIDER LT. VESSEL One fixed bright light	54 10.7 8 34.6	In $4\frac{1}{2}$ fms. at Mouth of River. Has two masts and flag	..	34	10	1805
River Elbe.						
I. Outer Light Vessel Three fixed br. lts.	54 0.1 8 18.2	In 11 fms. Three Masts; a light on each, and <i>red</i> flag at Main	..	..	3	
Loots Galliotte Lt. Ves. One fixed bright lt.		Pilot Vessel, $1\frac{1}{2}$ miles from Outer Vessel	..	..	..	
II. Middle Light Vessel Two fixed lights		Three Masts; blue and white flag at Main. $\frac{1}{2}$ m. from Pilot Vess.	..	31 18	3	1839
III. Inner Light Vessel		One fixed br. lt. Three Masts; <i>red</i> flag, with wh. square at M.	..	29	..	1857
NEUWERK Two fixed bright lts.	53 55. 8 30.	On Id. at entrance to River. S. by E. $\frac{1}{2}$ E., 685 yards apart ..		120 60	15 12	1814 1815
Kugel Baak One fixed bright light	53 53.5 8 41.7	Shows inside the Beacon, from N.W. $\frac{1}{2}$ N., and N.W.	..	..	..	1853
CUXHAVEN One fixed and flash. lt.	53 52.3 8 43.	Brick tower, 66 ft. high, W. side of entrance. It is a fixed lt. up the River	..	80	12	1853
Bösch One fixed bright light	53 53.7 9 15.	On E. side, when River is free from ice	..	..	..	
Storens One fixed <i>red</i> light	53 50. 9 24.3	N. Pier, at entrance of River Stor	..	32	6	1805
Glückstadt One fixed <i>red</i> light	53 47.1 9 24.5	On N. Pier	..	24	8	1846

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
Lühe Light Vessel		In 10 feet. Fixed bright light	..	..	..	
Schulau Light Vessel		In 2½ fathoms. Red light.....	..	..	..	
HELIGOLAND						
One fixed bright light	54 10.8 7 53.1	(British). A circular white tower, 60 feet high, on W. side	..	221	20	1811

HANOVER.**WESER RIVER.**

WESER LIGHT VESSEL	53 49.	At entrance in 8 fms. Two Masts	..	30	3	1818
One fixed bright lt.	8 8.3	and ball at the Fore				
HOHE WEG FLAT						
One fixed bright lt.	53 42.8	In one tower. Lower lt. from N.	2a	112	15	1856
One fixed red and br. light	8 14.9	by W. ¼ W., to E. by S.: it shows red to the Dwasgatt ..	44	44	7	1857
Bremerhaven		Bright light at 10 feet at new	..	..	10	
One br., one red lt.		Harb.; red lt. on old Port Mole				
Heppens		A small light near new Harbour	..	..	..	
WANGEROOG	53 47.4	E. of Island; tower white, 60	..	100	12	1856
One rev. br. lt., 2 min.	7 54.2	feet high; a beacon to E. by N.				
BORKUM ISLAND						
One fixed bright light	53 35.5 6 40.4	A red brick tower, 110 ft. high, at entrance of River Ems	2a	142	18	1817
EMS RIVER	53 20.3	On the Dyke of the Knock, at	6a	29	8	1856
One fixed bright light	7 3.	entrance				

NETHERLANDS.**ZUIDER ZEE.**

HARLINGEN	53 10.6	On Rampart.....	..	56	10	
One fixed bright lt.	5 25.					
STAVOREN	52 25.2	N.W. of side of Harbour	..	39	10	
One fixed bright lt.	5 21.6					
URK ISLAND	52 39.7	On the S.W. Point.....	4b	69	10	
One rev. br. lt. 2½ m.	5 35.8					
SCHOKLAND ISLAND	52 37.2	On S. Point of the Island	..	34	8	
One fixed bright lt.	5 46.7					
HOEK, near Amsterdam	52 22.3	At the angle of the River Y	..	51	10	
One fixed bright lt.	5 1.1					
MARKEN ISLAND		One fixed br. lt. on S.E. Point..	..	52	10	
GELDERSCHE HOEK	52 44.6	A stone tower on the Dyke	..	55	10	
One fixed bright lt.	5 17.2					
Wieringen	52 53.4	On W. of Id., N. and S., 448	..	39	6	
Two fixed bright lts.	4 56.3	yards apart	16	16	4	

There are also small Harbour lights in the Zuider Zee at Workum, Hindelopen, De Lemme, Blokzyl, Genemuiden, Kampen, Elburg, Harderwyk, Nykerk, Muiden, Edam, Hoorn, Enkhuizen, Medembik, &c.

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
SCHIERMONNIKOOG Two fixed bright lts.	53 28.8 6 10.	On the North side of the Id., S.E. by S., 1,102 yds. apart ..	15	147 139	16	1854
TERSCHELLING One rev. br. lt., 1 min.	53 21.7 5 13.1	On the Brandaris tower, near the W. end of Island	2b	177	20	
VLIELAND One fixed bright light	53 17.8 5 3.8	!.....	..	151	12	
NIEUWE DIEP One fixed bright light One fixed <i>red</i> light	52 58. 4 47.	On the Weirhoofd, N.E., 51 yds. apart		29 35	8 8	1843 1843
KYKDUIN One fixed bright light	52 57.1 4 43.5	On the Fort on the high white Sandhill	.. 1a	.. 161	.. 20	1822 1853
EGMOND-AAN-ZEE Two fixed bright lts.	52 37.2 4 37.6	S.S.E. $\frac{3}{4}$ E., 408 yds. apart. N. Lighthouse, called Van Speyk's Tower	3a	120 126	16 18	1834
Zandvoort One fixed light	52 22.5 4 31.5	N. of Village, a coal fire? for fishermen	..	56	4	
Noordwijk-aan-Zee One fixed bright light	52 14.6 4 25.9	For fishermen. On a scaffold ..	..	66	5	
Katwijk-aan-Zee		Light for fishing boats	..	82	6	
SCHEVENINGEN One fixed bright light	52 6.3 4 16.3	A stone tower, S. of town; half mile S.W. of Church	3a	95	16	1850
VOORNE ISLAND.						
Brielle Harbour		Fixed bright light on E. Mole ..	..	16	4	1858
Steenen Baak		One fixed bright light	..	..	..	
Oostvoorne One br. and one <i>red</i> fixed light	51 54.8 4 4.5	Half mile W. of Village; S.E. $\frac{1}{2}$ S., 457 yards apart	..	59	7 8	1857
HELLEVOETSLOUIS One fixed bright lt.	51 49.2 4 7.9	W. end of Harbour	●	46	8	1858
GOEREE ISLAND.						
Middelharnis		Fixed bright Harbour light	..	..	..	1857
GOEDEREDEE or GOEREE One fixed light	51 49.1 3 58.8	On Church tower. <i>Red</i> towards E.N.E. to N.E. by E.	2a	148	18	1856
Kwaden Hoek		One fixed bright light	..	..	..	1857
Steenen Baak		<i>Red</i> lt. to W., on N. side of Id.	..	98	10	1858
SCHOUWEN ISLAND.						
Ossenhoek		One fixed bright light	..	23	8	1859
BROUWERS HAVN. Two fixed br. lights	51 44.5 3 47.5	At Renesse, on N. side of Id., E.S.E. $\frac{1}{4}$ E., 800 yards apart	3a 4a	148 82	16 12	1848
Verklikker, or guide lt.		N.W. of Id., to show Anchorage	..	55	6	

Name and Character of Light.	Lat. N. Long. E.	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
SCHOUWEN One rev. bright lt.	51° 42.5 3 41.8	A fine tower, 166 ft. high, on W. end of Id. Bright 25 secs. every 1½ min.	1b	171	20	1744 1840
WALCHEREN ID.						
Sloe		Light S. of Middelburg Harbour	..	33	3	
VERRE One fixed bright lt.	51° 32.9 3 40.5	S. side of entrance	4a	38	10	1847
WEST CAPPEL One fixed bright lt.	51° 31.8 3 27.1	On old Church Tower	•	144	15	1818
FLUSHING One fixed bright lt.	51° 26.4 3 34.7	On Westhaven Bastion	..	49	10	
S. BEVELAND ID.						
BORSELEN	51° 25. 3 44.	One fixed bright light	4a	35	9	1847
Bathz One fixed bright lt.	51° 23.7 4 12.8	S.E. of Fort.	..	32	5	
Goes Harbour One fixed bright lt.	51° 32.8 3 55.8	On N. side of entrance	..	31	5	
TER NEUSE, AXEL ID. One fixed bright light	51° 20.5 3 50.	On W. Jetty	..	43	10	1845
THOLEN ISLAND.						
Gorishoek One fixed bright lt.	51° 31.6 4 4.8	N. of Ferry	..	35	4	
Stavenisse		Bright lt. at E. Angle of Haven	..	27	5	
ZIERIKZEE Two fixed bright lights	51° 37.9 3 55.4	One at S. Angle, near Zierikzee; the other on W. Haven Heads	..	31 43	4 6	
ZIJPE Two fixed bright lts.	51° 39.3 4 6.3	One on Outer Dyke of Stooft Polder; the other on Land side of Dyke	..	31 39	5	
Ooltgensplaat One fixed bright light	51° 40.9 4 22.2	End of Harbour Dam, River Volgerak	..	15	6	
WILLEMSTAD One fixed bright light	51° 41.8 4 26.7	In front of Bastion.	..	41	10	
Strijen-Sas One fixed bright light	51° 42.7 4 35.6	W. Heads of Outer Haven	..	48	6	
DORDSCH KIL One fixed bright light	51° 43.4 4 37.5	W. extremity of Dordt Channel	..	48	10	
Krab		In Old Maas. One bright light	..	31	2	
MAAS RIVER		Small Harbour lights at Schie- dam, Pernis, and Vlaardingen	..	..	..	

Name and Character of Light.	Lat. N. Long. E.	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
NORTH HINDER LT. VESSEL	51 36.7 2 34.6	In 14 fathoms, on the E. side ..	●	40	11	1858
One fixed br. light						
PAARDE MARKET LT. VES.	51 23.7 3 20.	S.W. part of Bank	●	..	..	1849
One fixed red light						
Heyst	51 20. 3 14.	N. of Town	..	48	8	1842
One fixed bright light						
Blankenberg	51 18.9 3 8.	In small Fort	..	44	6	1839
One fixed bright light						
OSTENDE	51 14.4 2 55.9	Tower, 170 feet high, 820 yards E. by N. of old light	1a	189	20	1860
One fixed bright lt.						
E. Pier		Red light, while 8 to 14 ft., and bright lt., while 14 ft., on Bar	..	25 40	6 7	1849
W. Pier		Green light all night	..	25	7	...
Nieuport Tide Light	51 8.4 2 43.	E. side of Port, from half flood to half ebb	..	32	6	1825
One fixed bright light						

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
DUNKERQUE One rev. br. lt. 1 min.	51 3. 2 22.	Brick tower, 180 ft. high, on Pier Head	1b	194	24	
DUNKERQUE PORT One bright and one <i>red</i> fixed light		Bright lt. on Heuguenar Tower; <i>red</i> light on W. Mole Head ..	5a ●	85 23	9 3	1845
GRAVELINES Three fixed br. lights	51 0.3 2 6.5	One lt. on Fort Philippe; 2 lts., 65 yds. apart, on S.W. Mole of Fort Philippe	3a ●	95 20	15 6	1843 1854
WALDE POINT One fixed and flash. lt.	50 59.7 1 55.1	Br. lt., with <i>red</i> flash every 20 secs.; no eclipse	..	34	10	1859
CALAIS One fixed and flash. lt.	50 57.7 1 51.1	Fixed lt., with flash every 4 min.; in tower, 167 ft. high, on Old Fortifications	1d	190	20	1848
CALAIS HARBOUR Two lts. and one <i>Tide</i> lt.		<i>Red</i> lt. on W. Jetty; <i>green</i> lt., in fair weather, on E. Jetty; and br. <i>tide</i> light on Fort Rouge while 8 feet	● 6a	16 33	2 9	1842
CAPE GRISNEZ One rev. br. lt., $\frac{1}{2}$ min.	50 52.2 1 35.1	Tower, 46 feet high, $\frac{1}{4}$ mile S. of Cape. Eclipses not total at 12m.	1b	194	22	1842
Boulogne Two fixed bright lts., and one fixed <i>red</i> lt.	50 43.9 1 35.1	Two br. lts. in one tower; higher lt. while 9 $\frac{1}{2}$ ft.; lower lt., from high water to 9 ft. ebb. <i>Red</i> lt. on N.E. Jetty while 9 $\frac{1}{2}$ feet ..	6a ●	43 33 46	9 4	1835
ALPRECK POINT One fixed and flash. lt.	50 41.9 1 33.7	A br. lt., with <i>red</i> flash every 2 min. Tower, 33 ft. high, 2 $\frac{1}{2}$ miles S.W. of Boulogne	4d	161	12	1842
ÉTAPLES or CANCHE RIVER Two fixed br. lts.	50 31.4 1 35.5	At Touquet, S. side of Mouth of River, in towers 171 ft. high, N.N.E. and S.S.W., 273 yards apart	1a	174	20	1852
Lornel Point		One fixed lt. on N. side of Mouth	●	52	6	
PT. HAUT-BANC OF BERCK One fixed bright light	50 24. 1 33.5	N. side of Mouth of l'Anthie River	4a	66	10	1836
SOMME RIVER. <i>Crotoy</i> One fixed bright lt.	50 12.9 1 37.3	On N. side of entrance. <i>Tide</i> <i>light</i> while 3 feet	●	..	4	1851
<i>Hourdel Point</i> One fixed bright lt.	50 12.9 1 33.9	On S. side of entrance. <i>Tide</i> <i>light</i> while 2 feet	●	..	4	1852
CAYEUX One fixed and flash. lt.	50 11.7 1 30.7	On S. side of entrance. Fixed light, with flash every 4 min.	3d	92	15	1835
<i>Cayeux</i> One fixed bright lt.		812 yards S.W. of Cayeux light, from 3 $\frac{1}{2}$ hours flood to 1 $\frac{1}{2}$ ebb.	●	..	..	1856
Treport One fixed bright light	50 3.9 1 22.1	<i>Tide</i> light on W. Mole, while 6 $\frac{1}{2}$ feet in the Channel	5a	36	10	

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
<i>Dieppe, W. Mole</i> One fixed bright lt.	49 56. 1 5.2	<i>Tide light</i> while 10½ feet	..	39	10	
<i>E. Mole</i> Three fixed br. lts.		On a Mast. Lowest lt. all night; highest light from 2½ hours be- fore to 2 hours after high water; middle lt. from 2 hours before until high water	●	23 31 27	4	
AILLY POINT One rev. br. lt. 1 min.	49 55.1 0 57.5	Tower, 66 ft. high, on the Point. Eclipses not total at 10 miles	1b	305	27	
ST. VALÉRY-EN-CAUX One br. 1 red fixed lt.	49 52.1 0 42.7	<i>Bright tide light</i> on W. Jetty while 8½ feet. <i>Red</i> lt. on E. Jetty	● ..	29 24	6 8	1857 1857
FÉCAMP One fixed bright light	49 46.1 0 22.3	On Fagnet Point, above the chalk cliff. Sometimes obscured by fog	1a	426	18	1836
Fécamp Harbour ...		Fixed and flash. <i>Red tide light</i> on N. Jetty while 10 ft. Fixed <i>red</i> light on S. end of Jetty	5a	39 29	10 3	
RIVER SEINE.						
LA HÈVE Two fixed bright lts.	49 30.7 0 4.3	Two towers, 66 ft. high, on the Cape, S.W. ½ S., 69 yds. apart	1a	397	20	
HAVRE One fixed bright lt.	49 29. 0 6.3	On N.W. Jetty. An Orange lt. also on S.E. Pier, vis. 1 mile; and a Lantern, with coloured glasses, on the Quay	5a	39	10	1843
HOC One fixed bright lt.	49 28.8 0 11.2	On Point, N. Bank of River Seine	5a	39	10	
Hode Point		One bright light on the Point ..	●	..	8	1847
Tancarville		One bright light on the Point ..	●	..	8	1847
Villequier		One br. lt. 1 m. W. of Vatteville Church	●	..	3	
Caudebecquet		One br. lt. ¾ m. E. of Caudebec Church	●	..	3	
Neuville		One br. lt. 1½ m. below Vatte- ville Church	●	..	3	
Vaquerie		One br. lt. 1½ m. above Aizier Church	●	..	3	
Aizier		One bright lt. near the Church	●	..	4	
Courval		One br. lt. 2½ m. above Quille- bœuf light	●	..	3	
Gros-Heurt		One br. light ½ m. above Point Quillebœuf	●	..	3	
QUILLERCEUF One fixed bright lt.	49 28.4 0 31.6	N. end of Quay, S. Bank	5a	33	10	
La Roque		One bright light on the Point ..	●	..	8	
Berville		One bright light N. of Church..	●	..	8	

Name and Character of Light.	Lat. N. Long. E. Long. W.	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
FATOUVILLE One fixed and flash. light	49 24.9 o 19.4	Tower, 105 feet high, on the Heights. Br. light, with <i>red</i> flash, every 3 minutes	1d	420	20	1860
HONFLEUR Two fixed br. lights	49 25.5 o 13.6	On Hospital Jetty, N.W. end of Tower; and <i>Tide light</i> on E. Jetty, while 6½ feet	3a 5a	82 29	15 6	1857 1843
TOUQUES RIVER Two fixed bright lights	49 21.7 o 4.5	W. side, 153 yds. apart. <i>Lower lt.</i> while 7 feet on Bar. In one lead in	● ●	33 20	6 6	
L'ORNE RIVER Two fixed bright lts. One fixed <i>red</i> light	Long. W. 49 16.6 o 15.6	Br. lts. on Church and Redoubt of Oyestreham, W. side of entr. <i>Red Tide lt.</i> on N. end of W. Jetty, 3 hours before and after high water	5a ● ●	92 39 ..	10 4 2	 1855
Courseulles One fixed bright light	49 20.3 o 27.5	On W. Jetty Head	●	30	6	1857
POINTE DE VER One fixed and flash. lt.	49 20.5 o 31.2	800 yards from the shore. Fixed light, with flash every 4 min.	3d	138	15	
PORT-EN-BESSIN Two fixed bright lights	49 21.1 o 45.6	N.E. by E. and S.W. by W., 79 yards apart. <i>High tide lt.</i> while 12 feet on Bar	5a 5a	131 92	8 6	1854
Grandcamp One fixed bright light	49 23.4 i 2.6	875 yards West of Church	●	26	3	1836
PORT D'ISIGNY Two fixed bright lights	49 19.3 i 6.7	N. by E. ½ E. and S. by W. ½ W., 306 yards apart	5a	46 23	10 8	1852
ST. MARCOUF One fixed bright light	49 29.9 i 8.9	On the Fort, E. of Sand-fly Island	5a	56	10	1840
MORSALINE One fixed bright light	49 34.3 i 19.4	On the Mound. Much higher than La Hougue light	5a	282	10	1836
LA HOUQUE One fixed bright light	49 34.3 i 16.4	At S. end of Fort	5a	36	10	1836
SAIRE POINT One fixed bright light	49 36.4 i 13.9	On Reville Redoubt	5a	36	10	1836
BARFLEUR One rev. br. lt. ¼ m., & Two fixed bright lts.	49 41.9 i 16.	Rev. lt. on the Cape. Bright lts. on S. side of entrance, S.W. by W. ½ W., and N.E. by E. ½ E., 309 yards apart	1b 6a 6a	236 23 43	22 8 9	1836
LEVI CAPS One fixed and flash. lt.	49 41.8 i 28.5	Tower, 103 feet high. Lt. br., with <i>red</i> flash every 3 min. ..	4d	115	12	1858
CHERBOURG						
Port de Commerce		<i>Red</i> light on E. Jetty	4a	33	3	1838
PELÉE ISLAND One fixed bright lt.	49 40.3 i 34.9	On Fort Impérial	5a	85	10	
LA DIGUE One fixed & flash. lt. One fixed <i>green</i> light One <i>red</i> light	49 40.1 i 37.2	Bright fixed, with flash every 3 min., on Central Fort. <i>Green</i> light on Eastern Head. Temporary <i>red</i> light on W. Head	5d ● ●	66 .. 39	10 2 10	1839 1853 1853

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
QUERQUEVILLE FORT One fixed bright lt.	49 40.3 1 49.1	On the Guard-house	5a	59	10	
CAPE DE LA HAGUE One fixed bright light	49 43.4 1 57.3	On the top of Gros du Raz Rock, half mile from Cape	1a	157	18	1837
CASKETS Three rev. br. lights, 20 secs.	49 43.4 2 22.5	(British). Placed triangularly on the highest Rock, E. $\frac{1}{4}$ N., 62 yards; S.W. $\frac{1}{4}$ W., 46 yards; and N.W. $\frac{1}{4}$ W., 24 yds. apart	●	113	15	1723 1855
HANOIS or HANO- VEAUX ROCKS One light building	49 25.8 2 43.3	(British). Building	..	..	..	1861
GUERNSEY One fixed bright light	49 27. 2 33.	(British). On St. Pierre, S. Pier Head	●	40	11	1832
JERSEY						
VERCLUT BREAKWATER One fixed bright lt.	49 13.3 2 1.2	(British). On the Outer end, in St. Catherine's Bay	5a	60	11	1857
ST. HELIER One fixed bright lt.; One fixed red lt.; and One fixed blue light	49 10.5 2 7.3	Bright light on Victoria or S. Pier; red light on Albert or N. Pier; blue light on Old N. Pier.....	● ● ..	31 15 17	6 3 3	1858 1859 1858
Gouray Pier Head		One fixed bright light	..	..	..	1857
Dielette One fixed br. and red lt.	49 33.1 1 51.7	On Jetty Head. Red lt. at head of Harbour. N.W. and S.E., 169 yards apart		23 75	5 9	1858
CAPE CARTERET One rev. br. lt., $\frac{1}{2}$ min.	49 22.4 1 48.5	Tower, 49 feet high, on Cape ..	2b	262	18	
Portbail Two fixed red lights	49 20. 1 43.	On Church Tower and Point Dune, S.W. $\frac{1}{4}$ S., 953 yds. apart	..	..	..	1859
Sénéquet	49 5.5 1 39.8	Building, 1861	..	..	..	
RÉGNEVILLE One fixed bright light	49 0.5 1 34.9	On Agon Point	5a	33	10	1856
CHAUSEY ISLANDS One fixed and flash. lt.	48 52.2 1 49.4	On S.E. Point. A br. lt., with red flash every 4 min.	3d	121	15	1847
GRANVILLE One fixed bright lt., & One fixed red light	48 50.1 1 36.9	Bright lt. on Granville Rock, or Cape Lihou. Red lt. on Mole Head, W. side of entrance ..	3a ●	154 26	15 3	1839
ST. MALO One fixed bright light	48 39. 2 1.7	On the new Mole des Noires ..	5a	33	10	1842
CAPE FREHEL One rev. br. lt., $\frac{1}{2}$ min.	48 41.1 2 19.2	Tower, 72 feet high, on the Cape	1b	259	22	
LÉGUÉ PORT One fixed bright light	48 32.2 2 43.2	On Point Aigle	5a	49	10	1857
ILES SAINT QUAY One fixed bright light	48 40. 2 48.6	On Harbour Island	5a	49	10	1850

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
BINIC PORT One fixed bright light	48 36.1 2 49.	On Penthièvre Mole	5a	36	10	1854
Portrieux One fixed <i>red</i> light	48 38.8 2 49.5	On end of Pier	●	29	3	1853
BRÉHAT ISLE Two fixed <i>red</i> lights	48 51.9 2 59.3	On Paon Rock and Rosedo Hill, W. $\frac{1}{4}$ S., and E. $\frac{1}{4}$ N., $\frac{1}{4}$ mile apart	5a	67 90	6 8	1860
HÉAUX DE BRÉHAT One fixed bright light	48 54.5 3 5.3	N.E. side of Rocks	1a	148	18	1835
SEPT ILES One fixed and flash. lt.	48 52.7 3 29.5	Tower, 52 feet high, on E. end of Ile aux Moines. Fixed, with flash every 3 min.	3d	184	15	1835
TRÉGUIER RIVER One fixed <i>red</i> lt., and One fixed bright light		Proposed (1861). <i>Red</i> lt. on Mill of St. Antoine, and br. lt. on Harbour Mill	..	..	..	
PERROS BAY Nantouar Bridge One fixed bright lt.	48 48.1 3 23.9	On S.E. shore of Bay	..	33	10	1860
Kerjean		Fixed br. light, 750 yds. S.E. of Nantouar Light	..	253	14	1860
Pigeon House		Bright light on S. shore of Bay	..	89	12	1860
Kerprigent One fixed bright lt.	48 46.7 3 28.4	Near the Mill, 3,133 yards S.W. of Pigeon House Light	..	259	14	1860
Ploumanac'h Port One fixed <i>red</i> light	48 50.3 3 29.1	On the Point	..	69	5	1860
MORLAIX ILE NOIRE One fixed & flash. lt.	48 40.4 3 52.6	Fixed light, with flash every 2 minutes	5d	46	10	
TOUR LA LANDE One fixed bright lt.	48 38.2 3 53.2	(There is also a small <i>red</i> lt. on the Château du Taureau for the anchorage.)	5a	285	12	
Jardin or Louet Id.		One fixed light building, 1861 ..	..	..	..	
ILE DE BAS One rev. br. lt., 1 min.	48 44.7 4 1.7	Tower, 131 feet high, on W. part	1b	233	24	1836
ILE VIERGE One fixed and flash. lt.	48 38.4 4 34.2	On E. Point. Br. fixed lt., with <i>red</i> flash every 4 min.	3d	108	15	1845
ABERVRACH 1. One bright and 1 <i>green</i> light; also 2. One <i>red</i> and 1 br. light	48 35.7 4 33.5	1. Br. lt. at Head of St. Antoine Creek, and <i>green</i> lt. on E. of Palme Beach. 2. <i>Red</i> lt. on Plouguerneau Steeple, and br. lt. on Ile Vrach, E. side of entrance	● ● 6a ●	49 29 226 59	4 3 10 4	1845 1845
OUessant, or USHANT One fixed bright lt.	48 28.5 5 3.5	N.E. Point of Id. A second lt. on S.W. Point is proposed (1861).	1a	272	18	
CONQUET PORT One fixed bright light	48 21.7 4 47.5	On Kermorvan Point	4a	72	12	1849

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
ST. MATHIEU One rev. br. lt. $\frac{1}{2}$ min.	48 19.8 4 46.4	Tower, 82 feet high on the Point	2b	177	18	1835
BREST						
MINOU POINT One fixed bright lt.	48 20.2 4 37.	Tower, 79 feet high, on the Point.....	3a	105	15	
PORTZU POINT One fixed and flash light	48 21.5 4 32.2	Tower, 108 feet high, 4 miles E. $\frac{1}{2}$ S. of Minou Light. Flash every 3 min.	2d	184	18	
Camaret Bay		Light building (1861) on E. Co.	..	..	..	
TOULINGUET POINT One fixed red light	48 16.8 4 37.9	S.W. side of entrance	4a	161	10	1849
DOUARNENEZ BAY One fixed bright light	48 6.2 4 21.5	On Tristan Ile.....	4a	114	10	1857
ILE DE SEIN One fixed and flash lt.	48 2.7 4 52.	N. Point of Id. Fixed lt., with flash every 4 min.	1d	148	20	1843
BEC DU RAZ One fixed bright light	48 2.4 4 44.	Tower, 49 feet high on the highest part	1a	259	18	1843
Audierne Port One fixed red lt., and One fixed bright light	48 0.6 4 32.5	Red lt. on Raoulic Point; br. lt. near Capuchin Garden; N.E. $\frac{1}{2}$ N., and S.W. $\frac{1}{2}$ S., 1,203 yards apart	● 5a	36 69	5 12	1856
PENMARCH POINT One rev. br. lt. 1 min.	47 47.9 4 22.4	On the Point, on the Church-of St. Pierre.....	1b	135	22	
Loc-tudy		Building (1861) on Pont l'Abbé	..	..	..	
ODET RIVER One fixed red light, and One bright light	47 52.3 4 6.8	On Coq Point, N. $\frac{3}{4}$ E., and S. $\frac{3}{4}$ W., 291 yds. apart. In one lead in	●	33 56	7 9	1848
PENFRET One fixed and flash. lt.	47 43.3 3 57.3	N. Point of Id. Fixed lt., with flash every 4 min.	3d	118	15	1838
CONCARNEAU Two fixed bright lights	47 52.2 3 55.2	On Croix Battery, and between Concarneau and Beuzec, in one, N.E. $\frac{1}{2}$ E., 2,052 yds. apart	6a	46 177	9 12	1849
Lanriec		Red lt. on E. of Concarneau Port	●	135	9	1857
Douelan Port		Two lts. building E. & W. of entr.	..	..	..	1861
ILE DE GROIX One fixed br. lt., and One fixed and flash. lt.	47 38.9 3 30.7	Fixed lt. on N.W. part; the other on Fort, on E. part. Br. lt., with red flash every 3 min. ..	1a 5d	194 171	18 10	
L'ORIENT 1. Two fixed br. lights 2. Two fixed br. lights	47 44.9 3 20.8	1. One lt. on Church Tower, the other at Lapeyrière, N. 83° E., 1,826 yards apart. 2. Two lts. in Port Louis, E. side, E. $\frac{1}{2}$ N., and W. $\frac{1}{2}$ S., 481 yards apart	6a 6a	62 39	12 10	1850 1850 1854
Etel River One fixed red light	47 38.7 3 12.9	At entrance of River	6a	20	3	1859

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above L. W.	Visible in Miles.	Year established.
BELLE ILE						
Sauzon Port One fixed <i>red</i> light	47 22.4 3 13.2	On the end of Mole	4a	28	..	1859
Palais Port One fixed br. light	47 20.9 3 9.3	Mole Head, S. side of entrance	6a	30	9	1836
GOULFAR BAY One rev. br. lt., 1 m.	47 18.7 3 13.5	Tower, 151 feet high, on S.W. of Island	1b	276	27	1836
HÆDIC ID. One fixed bright light	47 20.5 2 52.	Tower, 39 feet high, 600 yds. W. from E. Point of Island.....	5a	85	10	1836
QUIBERON BAY						
LA TEIGNOUSE One fixed and flash. light	47 27.4 3 2.8	On the Rock, S.E. of Quiberon Peninsula. Fixed light, with flash every 3 min.	4d	59	12	
Haliguen One fixed bright lt.	47 29.2 3 5.9	Tower, on N. Jetty	4a	40	9	1856
La Crac'h One <i>red</i> and 1 br. lt.	47 34.1 3 0.4	On left Bank of River, N. by E. and S. by W., 574 yds. apart	6a	29 69	9	1856
Navalo Port One fixed bright lt.	47 32.9 2 54.	On the S. Point of entrance to Morbihan	5a	72	10	1840
Penlan Point One fixed bright light	47 31. 2 30.2	On the Point	5a	52	10	
LE FOUR One rev. br. lt., $\frac{1}{2}$ min.	47 17.9 2 37.9	A round stone Tower on the Rock	2b	79	18	1822
Croisic Port Two fixed bright lts.	47 18. 2 30.9	Near the Church, N. and S., 50 yards apart	6a	13 33	6	1838
LOIRE RIVER						
Point l'Ève One fixed <i>red</i> light	47 14.5 2 16.1	Marks the channel to the town of St. Martin	6a	102	6	1856
AIGUILLON TOWER		One fixed bright light	3a	112	12	
COMMERCE TOWER		One fixed and flash. lt., flash 2 m.	3d	128	14	
St. Nazaire		One fixed br. light, on Mole Head	6a	26	8	1836
Paimboeuf Port One fixed bright lt.	47 17.4 2 2.	End of Mole	6a	26	8	1852
Pierre à l'Œil		One fixed light proposed (1861).	..	..	..	
St. Nicholas I.		<i>Red</i> light proposed (1861).	..	..	..	
Mindine Tower		One fixed light proposed (1861).	..	..	..	
Pornic Port One fixed bright light	47 6.6 2 7.	On Noveillard Point	6a	59	9	1846
PILIER ID. One fixed and flash. lt.	47 2.6 2 21.7	On N.W. Point. Flash every 4 min.	2d	105	18	
ILE D'YEU, near N. Point, One fixed bright lt.	46 43.1 2 23.	Tower, 108 feet high, on Mound. From N. Point 1,860 yards ..	1a	177	18	

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
BRETON PORT Three fixed br. lts.	46 43.6 2 21. .	One on Outer Jetty, N. side of entrance; one (proposed, 1861) on Point Corbeaux; and one at Head of Harbour	6a .. 5a	23 .. 49	8 .. 10	 1860
St. Gilles-sur-Vie One fixed red light	46 41.6 1 56.9	N. side of Jetty	5a	39	6	1852
LA CHAUME One fixed bright light	46 29.7 1 47.4	Tower, 85 feet high, on W. side of entrance to Olonne.....	4a	118	12	
Sables d'Olonne		Fixed br. lt., E. side of entrance	5a	23	8	
BARGES D'OLONNE		Flashing light, building (1861).	..	..	..	
Roche Bonne Lt. Vessel		Proposed (1861).....	..	..	..	
PERTUIS BRETON GROUIN DU COU POINT One fixed bright lt.	46 20.8 1 28.3	N., 32° E., 7 miles from the Tour des Baleines	5a	59	10	
AIGUILLON POINT One fixed bright lt.	46 16.3 1 12.8	Bearing S. by E., leads on to Mid. Channel	5a	33	10	
ILE DE RE BALEINES One rev. br. lt., $\frac{1}{2}$ m.	46 14.7 1 33.8	On N.W. Point. Flashes of unequal brilliancy	1b	164	22	1854
HAUT-BANC DU NORD One fixed br. lt.	46 15.8 1 35.20	On the Shoal	3a	72	15	1854
St. Martin Port One fixed bright lt.	46 12.4 1 21.9	On Demi-Bastion, E. of entrance	5a	52	6	
Port de la Flotte One fixed bright lt.	46 11.3 1 19.4	On the Mole	6a	30	9	1849
CHAUVEAU POINT One fixed bright lt.	46 8. 1 16.5	S.E. Point of Island	5a	72	14	1842
Rochelle Harbour One bright and one red fixed light	46 9.4 1 9.3	Upper br. lt. on E. Quay; lower lt. red, W. $\frac{3}{4}$ S., and E. $\frac{3}{4}$ N., 257 yards apart	5a	59 46	10 8	1852
ILE D'AIX One fixed bright light	46 0.6 1 10.8	On Fort at S. Point of Island ..	5a	56	10	
ILE D'OLÉRON CHASSIRON One fixed bright lt.	46 2.8 1 24.7	Tower, 141 feet high, N.W. Point of Island	1a	141	18	1836
La Pérotine One fixed bright lt.	45 58.2 1 13.9	End of Jetty	..	38	4	1859
Château Port Two fixed br. lts.	45 53. 1 11.2	Building, 1861. When in one will lead in	..	..	..	
RIVER GIRONDE CORDOUAN One rev. br. lt., 1 m.	45 35.2 1 10.5	A handsome structure on the Rock	1b	207	27	1727 1854

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
RIVER GIRONDE						
COUBRE POINT One fixed bright lt.	45 41.5 1 15.4	Tower, 100 feet high, on N. point of River, N. point of entrance	3a	121	5	1860
FALAISE AND TERRE NÈGRE One red & 1 br. lt.	45 38.9 1 6.9	Red light at Falaise, 600 yards from bright light on Terre Nègre Tower	5a 4a	46 118	7 12	1852 1842
Pontailiac One rev. red and br. light	45 38.2 1 3.7	Wooden Tower, 105 ft. high, on the Table land. Red and white alternately, for 20 secs.....	3b	177	15	1856
Royan		Bright light on Jetty	●	36	6	
St. George One fixed red light	45 36. 1 0.6	On East bank of River	..	44	7	1860
SUZAC One fixed red light	45 35.4 0 58.9	On the Sandhills at Suzac on East bank	..	121	12	1860
DE GRAVE One fixed bright lt.	45 34.3 1 3.4	On the Point	a	85	15	1828 1860
TALLAIS BANK LIGHT VESSEL	45 30.7 0 59.1	One fixed bright light, in four fathoms, on W. side	5a	33	9	1845
Tour de By Lt. Vessel One fixed bright lt.	45 27.6 0 45.3	On West Bank of River	5a	33	10	1860
Mapon Light Vessel	45 17.6 0 45.9	On West Bank of River	5a	33	10	1860
Ile de Patiras One fixed bright lt.	45 12.4 0 42.	On the North part of the Island	..	43	12	1860
Trompeloup		Fixed lt., on old Chapel, on W. Bank	..	..	15	1860
Richard		Fixed red lt., on W. side of River	4a	56	8	1845
Gaet		Fixed red light	..	..	..	
Pauillac	45 11.9 0 44.9	Two small lts, on landing-place	..	..	..	
Blaye		E. side of River. Light at land- ing-place	..	..	..	
Hourtin		Two lights, proposed (1861)	..	..	..	
ARCACHON BASIN One fixed bright light	44 38.7 1 15.1	On Ferret Cape, N. side of en- trance	1a	167	18	1840
CONTIS One rev. red and br. lt.	44 4. 1 20.	Proposed (1861)	..	..	..	
ANOUR RIVER One fixed bright light	43 31.8 1 31.5	On Jetty, S. side of entrance ..	..	38	6	1869
BIARRITZ One rev. br. lt. $\frac{1}{2}$ min.	43 29.6 1 33.6	Tower, 144 feet high, on Point St. Martin	1b	240	22	
SOCOA PORT One fixed bright light	43 23.7 1 41.1	W. Point of St. Jean de Luz Bay	5a	115	10	

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
FUENTERRABIA One fixed bright light	43 23.6 1 47.7	On Cape la Higuera, W. side of Bidasoa River	5a	285	7	1855
PASAJES PORT One fixed bright light	43 20.3 1 56.5	Cape la Plata, near W. entrance	4a	486	14	1855
SAN SEBASTIAN One fixed and flash. lt.	43 19.4 2 0.4	Mount Iguelde, W. side. Flash every 2 min.	3d	431	15	1855
MACHICHACO CAPE One fixed and flash. lt.	43 28. 2 49.4	Bright fixed light, with flash every 4 min.	1d	260	18	1852
BILBAO One fixed bright light	43 22.6 3 4.	Fort, on Point Galea, W. side of entrance	4a	380	10	1852
SANTONA	43 27.5 3 16.7	Building (1861)	..	..	..	
CASTRO URDIALES One fixed and flash. lt.	43 24.2 3 16.1	On Castle. Bright light, with red flash every 3 min.	5d	131	7	1853
SANTANDER MOURO ISLAND		One fixed bright light	5a	141	12	1860
CAPE MAYOR One rev. br. lt., 1 min.	43 30.3 3 47.1	1½ miles from Port entrance....	2b	298	24	1839
Llanes	43 27. 4 39.	Light building (1861)	..	..	..	
RIVADESELLA	43 31. 5 0.	Building (1861)	3a	..	..	
GIJON	43 35.3 5 38.	Near Sta. Catalina Hermitage..	4a	167	10	1855
PENAS CAPE One rev. br. lt. ½ min.	43 42.3 5 49.8	On the Cape.....	1b	338	21	1853
AVILES	43 38. 5 50.7	Building (1861)	..	..	..	
CUDILLERO One fixed bright light	43 36.2 6 9.1	Revallera Point	5a	94	10	1858
CAPE BUSTO One fixed and flash lt.	43 36.2 6 28.8	Bright, with red flash every 2 min.	3d	307	12	1855
ORRIO DE TAPIA ID. One fixed and flash. lt.	43 35.6 6 58.4	Fixed, with flash every 2 min...	3d	93	15	1855
PANCHA ISLAND One fixed bright light	43 34.7 7 4.2	Near Ribadeo	5a	79	9	1859
CAPE ESTACA One rev. br. lt., 1 min.	43 47.5 7 33.4		1b	307	20	1850
CAPE PRIOR One fixed bright light	43 33.7 8 19.9	On N. part of the Cape	3a	448	15	1854
CAPE PRIORINO One fixed and flash. lt.	43 27.8 8 20.5	Bright fixed, with red flash every 2 min.	4d	92	11	1854
CORUNNA One fixed and flash. lt.	43 23. 8 24.1	On Tower of Hercules. Fixed, with flash every 3 min.	3d	331	12	1847

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus.	Height above H. W.	Visible in Miles.	Year established.
CORUNNA, St. Antonio Cas.		Fixed light, building (1861)	6a	..	..	
CISARGAS ISLANDS One fixed and flash. lt.	43 21.8 8 50.2	On Isla Mayor, N. Peak. Fixed br. lt., with <i>red</i> flash every 4 m.	4d	358	11	1853
CAPE VILLANOS One fixed bright light	43 9.8 9 12.9	Camarinas	4a	225	10	1854
CAPE FINISTERRE One rev. br. lt., $\frac{1}{2}$ min.	42 52.6 9 15.4	S. Point of the Cape	1b	468	20	1853
CAPE CÉ One <i>red</i> fixed light	42 54.8 9 10.1	Octagonal Tower, 25 feet high, on the Cape	5a	82	8	1860
CAPE CORROBEDO One fixed bright light	42 34.6 9 4.8	On the Cape	3a	103	12	1853
SALVORA ISLAND One fixed and flash lt.	42 27.8 9 0.4	S. Point. Bright, with <i>red</i> flash every 2 min.	4d	82	10	1853
AROSA ISLAND One fixed bright light	42 34.1 8 52.	On the N.W., or Caballo Point	4a	38	18	1851
BAYONA or CIES ID. One rev. br. lt., 1 min.	42 12.4 8 54.1	Mount Faro, Middle Island	2b	595	20	1858
VIGO One fixed and flash. lt.	42 15.1 8 41.	On Castle of La Guia, $1\frac{1}{2}$ m. N.E. of Vigo. Flash every 3 min.	4d	102	10	1844

PORTUGAL.

PAVOA de Varzim		Fishing lts., 15 m. N. of Oporto	..	..	..	1857
OPORTO One rev. br. lt., 6 min.	41 9.1 8 37.2	At Nossa Senhora da Luz. (Bad light.)	●	220	20	1834
CAPE MONDEGO One fixed bright light	40 12. 8 55.2		●	330	20	1837
BERLENGAS One rev. br. lt., 3 min.	39 25. 9 31.2	Square tower, 100 feet high, on Great Berlenga Island	●	365	25	1848
CAPE CARVOEIRO One fixed bright light	39 21.1 9 24.3	Tower, 94 feet high, on highest part	●	182	15	1790
CAPE ROCA One rev. br. and <i>red</i> light, $1\frac{1}{2}$ min.	38 45.5 9 30.	Light <i>red</i> and white alternately. Round tower, 52 ft. high, $\frac{1}{2}$ mile N.E. of Cape	●	598	21	1772
RIVER TAGUS						
GUIA One fixed bright lt.	38 41. 9 27.2	Square tower, 96 feet high, at Nossa Senhora da Guia.	●	207	12	1771
SAN JULIAN One fixed bright lt.	38 39.7 9 20.	Square tower, 120 feet high, in the Fort	●	128	12	1848
BUGIO One rev. br. lt., $1\frac{1}{2}$ m.	38 39. 9 18.1	Tower of Lorenzo, 70 feet high	●	110	16	1775
Bolem One fixed <i>red</i> light	38 40.8 9 17.6	In Fort, near Castle	●	38	6	1847
CAPE ESPICHEL One fixed bright light	38 24.9 9 13.	Square tower, 100 feet high, on the Cape	1a	627	25	1848

M

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
Setuval, or St. Ubes One fixed bright light	38 31.1 8 53.	On Fort, at W. entrance of Har- bour	●	490	6	1775
CAPE ST. VINCENT One rev. br. lt., 2 min.	37 3. 9 0.	On the Convent	●	220	20	1846
CAPE SANTA MARIA One fixed bright light	36 56. 7 46.	On the Cape	●	109	15	1850

SPAIN.

South Coast.

GUADIANA RIVER Four fixed lights	37 11. 7 18.	Building, 1861, at Ayamonte. Two lts. at River Mouth; and two on Christiana or Higuerita Id., E. side of entrance	..	..	..	
-------------------------------------	-----------------	--	----	----	----	------

ODIEL RIVER

Huelva Two fixed br. lts.	37 13.4 6 51.6	On the Bar. In one lead over the Bar	●	..	3	1853
------------------------------	-------------------	---	---	----	---	------

Cartaya		Fixed lt. in River, building (1861)	3a	..	..	
---------	-------	-------------------------------------	----	----	----	------

GUADALQUIVIR R.

Chipiona		Temporary lt. on Church Tower	5a	72	8	1855
----------	-------	-------------------------------	----	----	---	------

Espiritu Santo		Fixed <i>red</i> light	..	..	..	1854
----------------	-------	------------------------------	----	----	----	------

Malandar Point One fixed bright lt.	36 46.3 6 21.9		..	36	6	1854
--	-------------------	-------	----	----	---	------

Salmedina Rocks	36 44. 6 27.	Fixed bright lt. building (1861)	..	..	..	
-----------------	-----------------	----------------------------------	----	----	----	------

Bonanza		Fixed bright light	..	52	7	1854
---------	-------	--------------------------	----	----	---	------

CADIZ One rev. lt., 1 min.	36 31.2 6 18.9	W. Tower of San Sebastian, 127 feet. Br. & <i>red</i> flash alternately	1b	146	20	1855
-------------------------------	-------------------	--	----	-----	----	------

CAPE TRAFALGAR	36 10. 6 1.	Building on the Cape (1861)	..	..	..	
----------------	----------------	----------------------------------	----	----	----	------

TARIFA One fixed bright light	36 0. 5 36.6	On the Island, S. of town	1a	132	20	1813 1855
----------------------------------	-----------------	---------------------------------	----	-----	----	--------------

Algeciras One fixed <i>green</i> light	36 7.3 5 26.1	Isla Verde, not shown from N. to W.	..	46	5	1850
---	------------------	---	----	----	---	------

GIBRALTAR

EUROPA POINT One fixed bright lt.	36 6. 5 21.	On Victoria Tower, 60 feet high	1a	150	15	1840
--------------------------------------	----------------	---------------------------------	----	-----	----	------

Old Mole, S.		<i>Green</i> to N.; br. to W.; <i>red</i> to S.	..	..	..	1857
--------------	-------	---	----	----	----	------

New Mole Head		<i>Red</i> light at end of works	..	..	..	
---------------	-------	--	----	----	----	------

Bagged Staff		<i>Green</i> light at landing place	..	..	..	
--------------	-------	--	----	----	----	------

Old Mole Head, N.		Fixed <i>red</i> light	..	..	..	1850
-------------------	-------	------------------------------	----	----	----	------

MAROCCO

CEUTA One rev. bright lt.	35 53.7 5 17.5	Tower, 88 ft. high, on Mosqueros Hill, Almina Point	1b	483	23	1855
------------------------------	-------------------	--	----	-----	----	------

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
GIBRALTAR						
EUROPA POINT One fixed bright lt.	36 6. 5 21.	Victoria Tower, 60 feet high ..	1a	150	15	1840
MALAGA One fixed and flash. lt.	36 43.5 4 25.6	Near E. Mole Head. <i>Red</i> flash every 2 min.	3d	125	15	1858
Adra Point	36 44. 3 21.	Building (1861)	6a	..	..	
ENTINAS POINT One fixed bright light	36 41.3 2 48.8	Building (1861)	3a	..	..	
Almeria Point	36 49.5 2 31.8	Building (1861)	6a	..	..	
CABO DE GATA	36 43. 2 12.	Building (1861)	..	..	..	
Aguilas Port One fixed bright light	36 23.5 1 39.4	W. part of Mount Aguilas, Punta Negra	6a	48	5	1860
TINOSO CAPE One fixed bright light	37 31.3 1 9.8	Tower building (1861)	1a	479	28	1859
CARTAGENA One fixed bright light	37 35.5 0 58.6	In Battery, on Point Podadera	4a	123	10	1856
PALOS CAPE	37 37.3 0 40.6	Building (1861) on the Height	1a	..	..	
Hormiga Grande	37 38.5 0 38.1	Building (1861) on the Islet....	5a	..	..	
PLANA, or TABARCA ISLAND One fixed and flash. lt.	38 10.2 0 26.6	$\frac{1}{2}$ mile from E. Point	3d	90	15	1854
Santa Pola One fixed bright light	38 12.5 0 30.1	On Talayola Tower, $\frac{1}{2}$ mile from Sea	6a	499	7	1858
Alicante One fixed <i>red</i> light	38 19.2 0 27.5	Temporary light on Rocks off Mole Head	..	26	2	1855
HUERTAS CAPE One fixed bright light	38 20.5 0 22.6		4a	123	10	1856
Villa-joyosa One fixed bright light	38 30. 0 11.6	On the Mole	6a	52	5	1859
Lat. N. Long. E.						
CAPE SAN ANTONIO One rev. br. lt., $\frac{1}{2}$ min.	38 48.5 0 12.4		2b	571	18	1855
Lat. N. Long. W.						
CULLERA CAPE One fixed bright light	39 12.3 0 13.5		3a	92	15	1858
Grao de Valencia One fixed bright light	39 28.3 0 20.	On the Mole	..	37	7	1856
El Cabanal One fixed bright light	39 28.8 0 20.	On Hermitage Tower	..	51	6	1855

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
OROPESA CAPE One fixed and flash. lt.	40 6.6 0 9.1	Flash every 3 min.	3d	74	15	1857
COLUMBRETES R. One fixed bright light	39 54. 0 44.4	N.E. part of Monte Colibre	1a	190	21	1859

BALEARIC IDS.

DRAGONERA ISLET One fixed and flash. lt.	39 35. 2 20.7	Majorca Island. Flash every 2 min.	3	1180	18	1852
--	------------------	--	---	------	----	------

MAJORCA ISLAND

CALA FIGUERA One fixed br. light	39 27.7 2 33.9	Yellow tower, 45 feet high, on the Cape. Palma Bay	5a	116	12	1860
Port Pi One rev. br. lt., 2 m.	39 33. 2 40.4	S. entrance. Palma Bay	..	132	8	
Palma Port One fixed blue light	39 34. 2 40.9	On the Mole	6a	37	4	
SOLLER PORT One fixed bright lt.	39 49.1 2 43.6	Grosa Point, W. entrance	4a	467	15	1858
C. FORMENTON	39 57.6 3 15.5	Building (1861)	2a	..	..	
Aucanada One fixed bright lt.	39 49.7 3 12.4	On the summit of the Islet in Alcudia Bay	6a	77	9	1861
CAPE PERA	39 42.7 3 9.9	Building (1861)	8a	..	..	

IVIZA ISLAND

CONEIRA ID. One rev. br. lt., 1 m.	38 59.8 1 16.5	On Cape Blanco	2b	289	20	1857
Cabrera Islands One fixed bright lt.	38 48.7 1 28.8	On Ahorcados Island	6a	75	7	1856
Betafoch Island	38 54. 1 29.	Building (1861)	6a	..	..	

FORMENTERA ID.

.....	Building (1861)	2a	..	..	
-------	-----------------------	----	----	----	------

MINORCA ISLAND

CABALLERIA CAPE One fixed bright lt.	40 5.7 4 9.4		2a	309	18	1857
Port Mahon One fixed bright lt.	39 52. 4 24.4	On Fort San Felipe	6a	74	7	1852
AYRE ISLAND One rev. br. lt., 1 m.	39 47.6 4 24.2	Yellow tower, 118 feet high, on S.E. part	2b	171	20	1860
DARTUCH One fixed & flash. lt.	39 54.6 3 52.2	S.W. Point. Flash every 3 m.	4d	70	16	1859

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
CAPE TORTOSA One fixed bright light	40 43. 0 56.9	At the Mouth of the Ebro R. Temporary building	..	34	11	1861
SALOU One fixed and flash lt. One fixed bright light	41 3.9 1 9.6	Fixed, near the Cape; flash every 4 min. Fixed lt. (temporary) on Mole, to be replaced with rev. lt.	3d ..	140 27	15 5	1858 1827
TARRAGONA One fixed bright light	41 6. 1 14.7	On the Mole	..	54	10	1832
LLOBREGAT RIVER One rev. br. lt., $\frac{1}{2}$ min.	41 19.3 2 8.9	N. side, on an old Fortress	2b	107	18	1852
Barcelona One fixed and flash lt. One green and br. lt.	41 22.3 2 11.2	Br. lt., with red flash every 4 m., on E. Mole Head. Green and br. lt., on Ledge of Stones off Pier Head	4d	43	9	1859
CALELLA One fixed and flash lt.	41 36.7 2 39.6	On the Height of Torreta. Flash every 2 min.	3d	166	18	1859
C. SAN SEBASTIAN One rev. br. lt., 1 min.	41 53.5 3 12.4	Near the Hermitage	1b	548	22	1857
CREUX CAPE One fixed & flash. br. lt.	42 18.7 3 19.3	$\frac{1}{2}$ mile in shore. Flash every 3 min.	3d	285	15	1853

FRANCE.

CAPE BÉARN One fixed bright light	42 31. 3 7.4	$\frac{1}{2}$ mile S. of Port Vendres	1a	751	22	1836
Port Vendres One fixed bright light	41 11.18 3 6.7	In Fort, W. side of entrance ..	•	98	10	
Port Nouvelle One fixed bright light	43 0.8 3 3.9	W. Jetty Head	•	33	10	
AGDE E. Jetty One fixed bright lt.	43 16.7 3 26.6	Entrance of Hérault River	•	30	6	
Fort Brescou One fixed bright lt.	43 15.5 3 29.9	On S.E. Bastion, $\frac{3}{4}$ miles S.E. of R. Hérault	•	59	10	
MONT AGDE One rev. br. lt., 1 m.	43 17.9 3 30.1	2 $\frac{1}{2}$ miles E. $\frac{1}{2}$ N. from R. Hé- rault	1b	413	27	1836
CETTE One fixed bright light Two fixed bright lights	43 23.8 3 42.1	Br. light on Fort St. Louis, on Mole Head, W. side of en- trance. 2 br. lights on S.W. Angle of Fort Richelieu, 840 yds. W.N.W. from former lt. (Will be altered.)	• •	175 270	15 4	1881
AIGUES MORTES One fixed and flash. lt. One fixed red light	43 32. 4 7.9	Flash lt., with flash every 4 m., on N. Mole of Channel. Red light on N.W. Mole Head ..	3d ..	66 ..	15 3	 1858
CAMARGUE, or FARA- MAN One fixed bright light	43 20.7 4 40.3	E. side of Mouth of Vieux Rhone	1a	125	18	

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
BOUC Two fixed bright lights	43 23.6 4 59.1	One on Mole Head, N. side of entrance; the other in Fort, S. side	●	52 98	10	
MARSEILLE						
Joliette Port One fixed <i>red</i> light	43 17.9 5 21.4	S. Point of Mole	●	82	8	1855
Fort St. Jean		Fixed br. lt., N. of entrance....	●	30	9	1837
Tete de More		Rev. br. lt. 3 min., S. of entrance	●	62	10	1837
PLANIER ROCK One rev. br. lt., $\frac{1}{2}$ min.	43 11.9 5 14.2		1b	131	20	1829
CASSIS One fixed bright light	43 12.8 5 31.9	Tower, 66 feet high, W. side of entrance	●	92	10	
CIOTAT Two fixed bright lights	43 10.3 5 36.6	On Berouard Mole Head, N. side of entrance, and on New Mole	● ..	39 52	10 6	 1858
Grand Nouveau Les Ambiez	43 4.8 5 46.3	Proposed (1861) on the Islet....	..	..	..	
SEPET CAPE One fixed and flash. lt.	43 4.1 5 56.6	On Rascas Point. Bright and <i>red</i> flash alternately every 3 min.	●	194	12	1851
TOULON ROAD One fixed bright light	43 6.2 5 55.5	On Grosse Tower	●	52	9	1859
GRAND RIBAUD ISLAND One fixed bright light	43 1.1 6 8.5	In W. passage to Hyères Road	●	112	10	1851
PORQUEROLLES ID. One fixed and flash. lt.	42 59. 6 12.3	On S. Point. Flash every 4 min.	1d	262	20	1837
LEVANT, or TITAN ISLAND One fixed bright light	43 2.8 6 30.5	A white tower, 39 feet high, on E. Point	3a	246	15	1837
CAMARAT CAPE One rev. br. lt., 1 min.	43 12. 6 40.4	Tower, 69 feet high	1b	426	27	1837
St. Tropez One fixed <i>red</i> light	43 16.4 6 38.1	On Jetty	..	36	5	1857
CANNES One fixed bright light	43 32.8 7 0.8	On the Mole	●	49	10	1854
ANTIBES One fixed bright light One rev. br. lt., 2 min.	43 33.8 7 7.9	Fixed lt., on Garoupe Peninsula, 1½ m. S. by W. $\frac{1}{2}$ W. of Antibes. Rev. light on S.E. Mole Head	1a ●	338 49	20 10	1837
NICE One fixed and flash. lt.	43 41.5 7 18.	On outer Mole. Br., with <i>red</i> flash every $\frac{1}{2}$ min. Not lighted when Harbour is unapproach- able	..	80	12	1855
VILLA FRANCA PT. One fixed & flash. light	43 40. 7 19.4	Flash every $\frac{1}{2}$ min.	..	223	18	

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
CORSICA.						
CAPE CORSE One rev. br. lt., $\frac{1}{2}$ min.	43 1.7 9 24.1	Tower, 72 feet high, on Giraglia Island	1b	269	22	1847
PORT ROSSA, or Rousse I. One fixed <i>red</i> light One fixed bright light	42 38.8 8 55.7	<i>Red</i> light on N.W. Point of Id. Bright light on Isola Rossa Jetty	●	180 38	6 5	1857 1858
CALVI One fixed bright light	42 35.2 8 43.3	Tower, 52 feet high, on Revellata Point.....	1a	289	20	1844
AJACCIO GULF One rev. br. lt., 4 min. One fixed bright lt., & One fixed <i>red</i> light	41 52.8 8 35.6 41 55. 8 44.4	Rev. (?) lt. on Sanguinaire Id.. Fixed light on Citadel. <i>Red</i> lt. on Mole Head	1b ● ..	322 62 20	20 10 5	1844 1851
<i>Bonifacio Port</i> One fixed bright light	41 23.3 9 8.6	Fixed light on Madonetta Point	●	98	10	1854
CAPE PERTUSATO One rev. br. lt., 1 min.	42 22.2 9 11.1	Tower, 52 feet high. Strait of Bonifacio	1b	325	27	1844
Récif Lavezzi, Bell Boat	41 19. 9 16.	Proposed (1861), with glasses to reflect neighbouring lights ..	..	..	..	
PORTO VECCHIO One fixed and flash. lt.	41 35.7 9 22.	On Chiappe Point. Flash every 4 min.	1d	217	20	1845
Alistro	43 15. 9 34.	Proposed (1861)	..	..	..	
BASTIA One fixed bright light	42 41.6 9 26.9	On the Mole Head	●	52	10	
Cape Caccia	40 33.4 8 5.	Building (1861)	..	..	..	
ASINARA ISLAND One fixed bright light	41 8. 8 17.8	On Caprara, or Scorno Cape, N. part of Island	1a	262	24	1859
PORT TORRES One fixed bright light	40 50.2 8 24.4	Asinara Gulf. E. Mole	..	49	10	1852
TESTA CAPE One fixed and flash. lt.	41 14.7 9 8.9	Bright fixed light, with <i>red</i> flash every 3 min.	3b	220	15	1845
RAZZOLI ISLAND One fixed bright light	41 18.5 9 20.5	N. Point in Bonifacio Strait....	2a	282	16	1845
Caprera Island	41 14.3 9 29.7	Proposed (1861) on Galera Point	..	..	..	
Cape Ferro	41 9. 9 32.6	Proposed (1861)	..	..	..	
CARBONARA One rev. br. lt., $\frac{1}{2}$ min.	39 5.3 9 32.6	Cavoli Island	1b	241	25	1858
ST. ELIAS CAPE One fixed and flash. lt.	39 11. 9 9.3	Bright light, with <i>red</i> flash every 2 min.	4d	239	14	1860
Cagliari Harbour Two fixed <i>red</i> lights	39 13.8 9 7.8	One on each side of entrance ..	..	26	4	1856

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
Maurizio Point One fixed bright light	43 52.6 8 1.7	End of Mole.....	..	20	3	1857
Oneglia Port One fixed br. or red lt.	43 53.1 8 0.8	On Mole, E. side.....	..	26	4	1858
DELLE MELE CAPE One fixed bright light	43 57.3 8 10.6		1a	307	20	1856
Vado Port One fixed bright light	44 16. 8 26.8	On San Lorenzo Fort	..	40	3	1857
Savona Port One fixed bright light	44 18.6 8 30.1	End of E. Mole	..	30	3	1857
GENOA						
Battery One rev. br. lt., $\frac{1}{2}$ m.	44 24.6 8 54.1	White square tower, at W. en- trance to Mole.....	..	370	24	1841
W. Mole Head		Fixed pale red light	..	42	6	1840
E. Mole Head		Fixed & flash lt., flash every 2 m.	..	94	10	1840
Porto Fino One fixed bright light	44 18.1 9 13.3	N. side of entrance	..	20	3	1857
Porto Venere One fixed bright light	44 2.7 9 50.2		..	20	3	1857
SPEZIA BAY One fixed bright light	44 2.1 9 53.5	S.W. part of Tino Island	..	384	24	1839
LEGHORN, or LIVORNO						
Mole Point One rev. br. and red lt., 40 secs.	43 32.8 10 17.7	S. part of Id. off Mole Pt. Br. and red alternately. Br. light in Marzocco Tower in stormy weather	..	154	19	
Breakwater, S. Head		Fixed red light	a	..	..	1857
Breakwater, N. end		Fixed green light.....	a	..	..	1857
Jetty		Fixed bright light on S.W. end N.B. The last 3 lts. not lighted when vessels cannot ap- proach; but br. light is then shown on Mole Head.	..	..	..	
Capraia Island One fixed bright light	43 2.9 9 51.1	On Ferrijone Cape	..	116	4	1857
ELBA ISLAND						
Port Ferrajo One fixed bright lt.	42 49. 10 20.3	On Stella Fort	..	200	6	
Port Longone One fixed bright lt.	42 45.5 10 24.7	On Focardo Fort.....	..	105	6	1845
PALMAJOLA ID. One rev. br. lt., $\frac{1}{2}$ min.	42 50.5 10 27.7	On centre of Island	2b	344	20	1844
Port Ercole One fixed bright light	42 23.7 11 12.7	Rocca Fort	..	..	6	1830

Name and Character of Light.	Lat. N. Long. E.	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
Pianosa Island	42° 33' 10 6.	Proposed (1861)	..	..	..	
Monte Circello		Proposed (1861)	..	..	..	
CIVITA VECCHIA One rev. br. lt., 4 secs.	42° 54' 11 44.1	Gray tower, 89 feet high, on S. end of Breakwater	2b	120	16	1840 1860
Fiumicino One rev. bright light	41° 45.8' 12 11.6	Tower, 89 feet high, at Mouth of R. Tiber	..	95	6	1825
Anzio, or Anzo One fixed bright light	41° 26.9' 12 42.3	On the Mole	..	56	4	1825
Port Nettuno One fixed bright light	41° 28.2' 12 43.8	Mole Head	..	65	9	
Badino One fixed bright light	41° 15.3' 13 12.	Extremity of Canal Portatore ..	..	16	6	
Terracina One fixed bright light	41° 16.9' 13 15.4	On the Mole	..	..	3	
GAETA						
ST. CATHERINE TOWER One rev. <i>red</i> & br. lt.	41° 12.4' 13 35.3	<i>Red</i> and bright, every 3 minutes	●	235	18	
St. Maria Tower		Fixed bright light, entrance of Port	●	86	8	1857
PONZA ISLAND Two fixed bright lights	40° 53.6' 12 58.1	On Rotunda della Madonna, S. side of Port; and on Jetty in Battery	..	200 38	10 5	1858 1857
San Angelo Point	40° 41.4' 13 53.3	Proposed (1861)	..	..	..	
BAY OF NAPLES						
ISCHIA ISLAND						
PT. CARUSO One fixed br. lt.	40° 45.4' 13 54.8	Proposed (1861)	1a	197	24	
Bagno Port One rev. br. and <i>red</i> lt., 2 min. One fixed <i>green</i> or <i>red</i> light	40° 44.8' 13 56.5	Rev. lt. at entrance of Port. Fixed lt., <i>green</i> to W., <i>red</i> to E.	5a	43	1 5	1856 1857
PROCIDA ISLAND One fixed bright lt.	40° 46.2' 14 0.9	On Chiupetto Point	4a	75	12	1847
CAPE MISENO One rev. br. lt., $\frac{1}{2}$ m.	40° 46.6' 14 5.3	Proposed (1861), on S. Point ..	4b	75	25	
Baia One fixed bright lt.	40° 48.8' 14 4.7	Iron, 33 feet high, on Tenaglia Fort	5a	46	6	1850
Futeolano, or Puz- zuoli One fixed <i>red</i> light	40° 49.3' 14 7.	On New Mole	..	26	3	1860

Name and Character of Light.	Lat. N. Long. E. °	Description, &c.	Description of Apparatus	Height above lt. W.	Visible in Miles.	Year established.
BAY OF NAPLES						
NISITA ISLAND One rev. br. lt., 2 m.	40 47.8 14 9.8	N. Point of Mole.....	4b	78	12	1841
NAPLES						
Mole Head		One fixed <i>red</i> light	..	52	6	1843
MOLE One rev. br. lt., 2 m.	40 50.3 14 15.6	Tower, 130 feet high, on the Elbow of the Mole	3b	158	20	1824 1843
Military Port One fixed & flash. lt.		Fixed, with flash every 3 min., S. $\frac{1}{2}$ E., 500 yds. from high lt.	6d	85	10	1852
CASTELLAMARE One rev. br. lt., 1 m.	40 41.6 14 28.1	On Mole Head	4b	106	15	
CAMPANELLA POINT One fixed bright lt.	40 34.3 14 19.2	Leads through the Bocca Piccola	4a	77	10	1846
CAPRI ISLAND One rev. br. lt., $\frac{1}{2}$ m.	40 32.1 14 12.	Proposed (1861) on Carena Point	..	..	..	
SICILY						
FARO One fixed and flash. lt.	38 15.8 15 41.5	On Pelorus Tower. Flash every 3 min.	.. 4d	.. 72	.. 13	— 1853
MESSINA						
Citadel Point One fixed & flash. lt.	38 11. 15 34.7	On E. part, in San Ranieri Tower. <i>Red</i> flash every 2 min.	.. 4d	.. 123	.. 12	— 1857
Salvatore Fort		Fixed <i>red</i> light	3a	85	2	1858
San Ranieri		Small br. lt., N. by W., from San Ranieri. To be replaced with flashing light	5a	23	3	
Catania One fixed bright light	37 29.2 15 5.1	On the Mole. Hardly distin- guishable from lts. in the town	5a	..	6	1848
CAPE SANTA CROCE One fixed bright light	37 15.3 15 15.		4a	91	14	1859
AUGUSTA One rev. br. lt. 3 min.	37 12.5 15 13.4	Avola Island	.. 4b	.. 90	.. 14	— 1858
MAGNISI One fixed <i>green</i> light	37 9.7 15 15.	Greco Point	5a	49	10	1859
SYRACUSA One fixed <i>red</i> light	37 3. 15 17.	In Castle, N. side of entrance ..	.. 6a	.. 86	.. 10	— 1858
MURRO DI PORCO One rev. br. lt. $\frac{1}{2}$ min.	37 0.2 15 19.	On the Cape.....	3b	108	15	1859
PASSERO ISLAND One fixed and flash. lt.	36 41.5 15 9.8	N.E. angle of Fort. Flash every 3 min.	4d	128	12	1854
CORRENTI ID. One fixed and flash lt.	36 38. 15 3.1	Building (1861) flash every 2 min.	1d	..	..	

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
SCARAMIA, or SECCA POINT One fixed bright light	36 46.3 14 30.6	On the Cape	3a	123	18	1839
GIRGENTI One fixed and flash. lt. One fixed red light	37 16.2 13 31.3	Fixed lt., with red flash every 2 min., in the Town. Fixed red light on Mole Head	3d 5a	166 26	8 6	1854
MONTE ROSELLO One fixed and flash. lt.	37 16.8 13 27.1	On the Point. Fixed, with red flash every 2 min.	3d	322	20	1859
CAPE GRANITOLA One fixed and flash. lt.	37 33.8 12 37.4	On Sorello Point, flash every 3 min.	2d	87	14	1853
MAUSALA One fixed and flash. lt.	37 48.1 12 28.1	On Mole, entrance of New Port. Flash every 3 min.	d	55	12	1849
FAVIGNANA ISLAND						
MARSALA POINT One fixed green light	37 55.8 12 21.3	S.E. Point of Island	5a	61	10	1859
SOTTILE, or MA- MONE One rev. br. lt., 1 m.	37 55.8 12 16.1	S. Point of Island	3b	141	20	1860
MARETIMO ISLAND		Fixed and flash. light building (1861) on Libeccio Point	1d	..	..	
LEVANZO One fixed bright light	38 3.5 12 21.4	On Cape Grosso	3a	282	18	1858
FORMICHE, E. ISLAND One fixed red light	38 0.8 12 26.	N.E. part of Tower	5a	85	10	1858
Palumbo Rock		Green light on end of Breakwater	5a	..	2	1860
TRAPANI One fixed and flash. lt.	38 1.9 12 30.1	Columbara Id., S. Point, on Mole Head. Flash every 3 min. ..	.. 5d	.. 136	.. 14	— 1855
ST. VITO CAPE One fixed & flash. light	38 13.2 12 45.	Red flash every 2 min. White tower, 143 feet high	3d	142	20	1859
CAPE GALLO One fixed bright light	38 14.1 13 24.1		4a	145	15	1854
PALERMO One fixed and flash. lt.	38 8.3 13 22.8	On Mole Head. Flash every 2 min.	.. 4d	.. 92	.. 12	— 1853
VULCANO ID. One fixed and flash. lt.	38 20. 14 55.	Rosario, or S.W. Point. Flash every 3 min.	4d	452	15	1853
MILAZZO One fixed bright light	38 16. 15 18.3	N. end of Peninsula	.. 4a	.. 285	.. 12	— 1853
St. Venere One fixed and flash. lt.	38 45. 16 11.5	Proposed (1861) between Pizzo and Bivona	4d	..	..	
Reggio One fixed bright light	38 6.7 15 38.7	Church of Santa Maria, Porto Salvo	..	75	5	1857
Taranto One fixed bright light	40 24.7 17 12.2	Cape St. Vito	..	64	7	1848
Gallipoli		Fixed br. light proposed (1861)	4a	..	..	

92 **MEDITERRANEAN. LIGHTHOUSES. MALTA ISLAND, &c.**

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
MALTA ISLAND.						
Marsa Musceit Harb.		2 fixed br. lts., vertical, on Tigne Point.....	..	71 46	4	1859
VALETTA HARB.	35 54-	Br. lt. in St. Elmo Castle. <i>Red</i>	..	167	15	1851
One fixed bright lt.	14 31.5	lights, vertical, on N.W. angle	..	80		
Two fixed <i>red</i> lts.		of Ricasoli Fort	..	55	4	1858
MARSA SIROCCO	35 49.5	On Dallahara Point	..	148	12	1853
One fixed <i>red</i> light	14 34-					
GOZO ISLAND	36 4-	Tower, 70 feet high, on N.W.	1b	400	24	1852
One rev. br. lt., 1 min.	14 10.	Pt., near Cape Giourdan				
Lampedusa Island	35 29.1	Cavallo Bianco Point.....	..	..	..	1855
One fixed bright light	12 36.1					

ADRIATIC SEA,
W. Shore.

BRINDISI	40 39.5	Fixed lt., with flash every 3 min.,	5d	72	13	1861
One fixed & flash. light	17 59.5	on Petagne Rocks. Fixed lt.	..	106	10	1844
One fixed bright light		on Castello Island				
CAPE GALLO	40 41.1	White tower, 82 feet high, on	3b	129	20	1861
One rev. br. lt., $\frac{1}{2}$ min.	17 56.3	Torre di Penne				
Monopoli	40 57.2	On end of Jetty	•	..	8	1858
One intermitting br. lt.	17 21.					
Mola	41 3.7	On the Pier	•	..	9	1858
One intermitting br. lt.	17 6.					
Bari	41 6.5	On W. Mole Head	5a	21	5	1859
One fixed <i>red</i> light	16 52.7					
St. Cataldo	41 9.	Proposed (1861) on the Point ..	..	..	..	
	16 53.					
MOLFETTA	41 12.5	On detached Mole. Flash every	•	64	14	1848
One fixed & flash. light	16 35.6	3 min.				
Barletta	41 19.4	On Breakwater	..	49	4	
One fixed bright light	16 16.9					
ANCONA	43 37.7	<i>Red</i> light on St. Clement Mole	6a	152	6	
One fixed <i>red</i> light, &c.	13 30.5	Head. Rev. lt. on Monte del	2b	406	21	1860
One rev. br. lt., 45 secs.		Cappuccini, $\frac{1}{2}$ mile E. of Port				
Sinigaglia	43 43.7	On E. Mole	..	59	6	
One fixed bright light	13 13.					
Fano	43 51.	On E. Mole	..	50	6	
One fixed bright light	13 1.					
Pesaro	43 55.	On E. Mole	..	50	9	
One fixed bright light	12 54.					
Minimo	44 5.	On E. Mole	..	69	6	
One fixed bright light	12 34.					

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
CESENATICO One rev. br. lt., 1 min. One fixed bright light	44 12. 12 26.	On E. Mole, standing N.E. and S.W.	..	30 55	12	
Cervia One fixed bright light	44 15. 12 22.	On the Mole	..	42	6	
Ravenna One fixed bright light	44 26. 12 18.	On the Mole	..	42	6	
VENICE						
Malamocco One fixed bright lt. One fixed red light	45 20.3 12 21.	Br. lt. (temporary) on Rocchetta Inner Mole; red lt. on Spignon Canal. N.W. by W., and S.E. by E., 1,380 yards apart	..	45	12 6	1860
Porto di Lido One fixed bright lt.	45 26. 12 30.	St. Erasmo. N. side of Channel	..	..	9	
PIAVE VECCHIA One fixed bright light	45 28.1 12 35.	On E. Point.....	..	148	14	1853
TRIESTE One intermitting br. lt.	45 38.8 13 46.	On Santa Teresa Mole. Flash of 8 secs. every $\frac{1}{4}$ min.....	3b	116	13	1858
BASSANTIA One fixed bright light	45 27.3 13 30.	On Salvore Point	..	110	24	1818
ROVIGNO One rev. red & br. lt.,	45 2.5 13 37.1	On Giovanni Rock. Alternately red and white light	3b	73	15	1854
POLA One rev. br. lt., $\frac{1}{2}$ min.	44 52.5 13 51.	Cape Compare	4b	42	10	1860
CAPE PROMONTORE One rev. bright light	44 45.3 13 53.7	On Porer Rock, 1 mile S.W. of Cape	..	111	15	1832
Fiume One fixed red light	45 18.7 14 25.5	Quarnero Gulf, Croatia. On Outer Mole	..	28	4	1859
BIANCA POINT One rev. br. lt., 3 min.	44 9.5 14 49.8	N.W. end of Grossa, or Lunga, Island	..	130	18	1849
ROSSO PORTO One fixed bright light	42 44. 16 52.	On Skrigeva Point, S. end of Lagosta Island.....	..	342	21	1851
CATTERO GULF One fixed bright light	42 23.5 18 32.3	Point D'Ostro	..	263	20	1854
Durazzo One fixed bright light	41 18.32 19 37.53	On the Mole.....	●	47	6	1856

IONIAN SEA.

CORFU ISLAND

TIGNOSO One fixed bright lt.	39 48.2 19 57.5	Tower, 55 feet high, on summit of Rock.....	..	100	14	1825
Corfu Harbour One fixed bright lt.	39 37.1 19 56.	In the Citadel	..	240	12	1822
Lefkhimo Lt. Vessel One fixed bright lt.	39 27.5 20 4.	On N. part of Shoal, in 5 fms. ...	..	40	8	1825

Name and Character of Light	Lat. N. Long. E. ° ' "	Description, &c	Description of Apparatus	Height above lt. w.	Visible In Miles.	Year established.
PAXO ISLAND						
LAKA POINT One fixed bright lt.	39 13. 20 9.	White tower, 121 feet high, on N. end of Island	..	369	22	1822
PORT GAYO One fixed bright lt.	39 11.5 20 12.3	White tower, 70 feet high, on Madonna Island	..	197	10	1825
Santa Maura One fixed bright light	38 50.5 20 42.9	On the Mole	..	54	9	1822
ITHACA ISLAND Two fixed br. lights	38 22.3 20 42.9	Port Vathy. On Andrea Point, E. side of entr.; & in Lazaretto	..	54 20	9 6	1822
CEPHALONIA ID.						
Port Argostoli One fixed bright lt.	38 11.2 20 28.5	On Hook Point	..	35	5	1822
GUARDIANA ROCK One fixed bright lt.	38 8. 20 26.5	White tower, 100 feet high	..	122	16	1822
MISSOLOGHI One fixed bright lt.	38 19.5 21 23.3	W. Point of entrance to Lake; 6 m. N.W. by W. $\frac{1}{2}$ W. from Bakari Point	..	..	10	1858
Patras One fixed <i>red</i> light	38 14.4 21 46.3	Column on Mole Head (light in- different?)	..	49	2	1848
ZANTE ISLAND One fixed br. lt., & One fixed <i>red</i> light	37 48.6 20 54.6	Br. light on Cape Krionero; <i>red</i> light on Mole Head	..	93 30	12 4	1822
STRIVALI IDS. One fixed bright lt.	37 15. 21 1.	On Convent in Stamphani Id ...	..	127	12	1829
Katakolo One fixed <i>red</i> light	37 39.2 21 20.8	A Wooden Frame on end of New Jetty	..	33	4	1861
ARCHIPELAGO.						
CERIGO ISLAND						
SPATHI CAPE One rev. br. lt., $\frac{1}{2}$ m.	36 22.8 22 57.5	$\frac{1}{2}$ mile from N. Point of Island..	●	363	24	1857
Kapali Bay One fixed bright lt.	36 8.5 23 0.3	E. side of Island	..	91	8	1858
Cape Monemvasia One fixed bright light	36 41.3 23 3.8	Lighted occasionally	..	..	..	1851
SPEZZIA ISLAND One fixed bright light	37 15.6 23 10.3	Near N.E. Point.....	..	93	10	1822
Egina One fixed bright light	37 44.5 23 25.7	S.E. elbow of N. Mole	..	17	4	1822
Cape Themistocles Two fixed lights	37 55.8 23 37.7	Vertical: upper light <i>red</i> and bright; lower light <i>red</i>	..	43 32	3	1859
Piræus of Athens Two fixed lights	37 56.2 23 38.3	<i>Red</i> lt. on N. Mole; br. lt. on S. Mole. 72 yards apart	..	20	3	1839

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
LIPSO ISLAND						
One fixed bright light	37 56.4 23 35.9	Grey stone tower, 46 feet high, on N.E. part	..	184	10	1854
NEGROPONT CANAL						
Berdoun Island	38 11.1 24 5.5	Proposed (1861), on C. Aia Ma- rina	..	..	..	
Bourzi Tower	38 22.7 23 40.	Proposed (1861)	..	..	..	
ZEA						
One flashing lt., 2 min.	37 39.5 24 19.7	St. Nikolas, N. point of en- trance	4c	108	12	1831 1860
SYRA						
One rev. br. lt., 1 min.	37 25.5 24 58.8	Rev. lt. on Gaidaro Id.; red lt. on E. Mole	..	105 14	20 ..	1859
One fixed red light						
ANDROS ISLAND						
One fixed & flash. lt.	37 57.5 24 42.5	C. Fassa, N.W. Point of Id., $\frac{1}{2}$ m. inland. Flash every 3 min. ...	1d	708	30	1859
Port Kastros						
One fixed bright light	38 22.6 26 9.3	Khios Id. On Mole Head	..	18	7	
Smyrna						
One fixed bright light	38 25. 27 3.5	Sanjak Kalessi	..	..	3	1848
MITYLENI ISLAND						
The Port						
Two fixed bright lts.	39 6. 26 34.7	On N. and S. entrances	..	..	6	1848
CAPE SIGRI						
One rev. br. lt. $\frac{1}{2}$ m.	39 12.8 25 49.9	Building (1861)	1b	164	24	
TENEDOS ISLAND						
One fixed bright light	39 50. 25 58.3	Building (1861) on Ponente Pt.	3a	98	14	
GADARO						
One fixed & flash. light	39 50.2 26 6.	Building (1861) on Islet. Red flash every $\frac{1}{2}$ min.	4d	66	12	
RHODES						
One fixed bright light	36 27. 28 16.2	On Mole Head	..	94	12	
CANDIA ID.						
CANEA						
One fixed bright lt.	35 38.8 24 1.3	On Mole Head	..	85	12	
Cape Drepano						
	35 28. 24 15.	Red light proposed (1861)	..	..	..	
Suda Island						
	35 29. 24 9.3	Green light proposed (1861)	..	..	..	
Rhithymna, or Rithymno						
	35 22. 24 28.5	Fixed bright light, on Mole	..	60	..	1850
Megalo Kastros						
One fixed bright lt.	35 21.3 25 8.3	In the Fort	..	47	..	

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
Koum Kaleh Two fixed <i>red</i> lights	40 0.3 26 12.4	On W. Battery, S. side of Dardanelles: vert., a few feet apart	..	50	4	1856
CAPE HELLAS One rev. br. lt. 1 min.	40 2.3 26 11.2	Tower, 33 feet high	2b	99	18	1856
Seddul Bahr		2 <i>green</i> lights, vertical, on a Pole	..	36	4	1856
KHEPHEZ, OR BARBER'S Pt. One fixed & flash. <i>red</i> lt.	40 5. 26 22.3	On ruined Battery. <i>Red</i> flash every $\frac{1}{2}$ min. Building (1861)	4d	46	12	1857
Kilid Bahr Two fixed <i>green</i> lights		Vertical; on Namaziah Fort ..	..	36 20	4	1858
Chanak Kalehsi Two fixed <i>red</i> lights	40 8.5 26 24.7	Vertical; on Battery, W. of town	..	66 46	4	1858
NAGARA POINT One fixed & flash. light	40 11.5 26 25.	On the Tower; <i>red</i> flash every 10 secs.	4d	39	10	1858
Bovali Kalessi Two fixed <i>green</i> lights	40 12.5 26 24.	Vertical; on Fortress	..	46 26	4	1858
Piskieri Cape Two fixed <i>red</i> lights	40 18. 26 35.	Vertical. (Proposed?)	..	66	4	
Galata Two fixed <i>green</i> lights	40 19.1 26 35.5	Vertical. $1\frac{1}{2}$ mile S. of Village	..	62 42	4	1858
Chardakh Two fixed <i>red</i> lights	40 23. 26 41.	Vertical. On low Point	..	59 39	4	1858
GALLIOLI One rev. br. lt., $\frac{1}{2}$ min.	40 24. 26 39.	W. Shore	●	108	18	1856
Fanous Point One fixed bright light	40 24. 26 44.3	E. Shore	..	..	..	
SEA OF MARMORA.						
Kutali Island One fixed bright light	40 33. 27 28.3	Building (1861) on N.W. part..	6a	66	8	
Palio Point Two fixed <i>red</i> lights	40 29.3 27 40.5	Building (1861)	..	59	4	
MARMORA ISLAND One fixed and flash. lt.	40 37.7 27 46.	On Fanar Id., off E. Point. <i>Red</i> flash every 2 min.	4d	132	12	1857
KHORAZ POINT One rev. br. lt., $\frac{1}{2}$ min.	40 42. 27 18.	Building (1861)	2b	98	18	
EREKLI POINT One fixed bright light	40 58.6 27 58.2		5a	49	10	
STEPHANO BURUN One fixed and flash. lt.	40 57.3 28 50.6	Tower, 65 feet high, 1 mile N.E. of Cape. Flash every 2 min.	3d	79	12	1857
FANAR BAY One fixed <i>red</i> br. light	40 58. 29 2.	On S. Point	4a	84	12	1856
CONSTANTINOPLE One fixed and flash. lt.	41 0.5 28 59.4	White tower, 147 feet high, on Seraglio Pt. Flash every min.	●	150	15	1858
Skutari Two fixed <i>red</i> lights	41 4. 29 0.7	Vertical; in Leander Tower....	..	79 59	4	1857

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
Tophana One fixed bright light	41 1.3 29 0.3	A small light on the Rock.....	..	..	..	1855
Defterdar Point		2 green lights proposed (1861) ..	..	..	..	
Roumili Hissar		2 green lights proposed (1861) ..	..	..	..	
Khandilli Point		2 red lights proposed (1861)	..	..	..	
Khanlijeh		2 red lights proposed (1861)	..	..	..	
Yeni Keui Lt. Vessel	..4...	3 green lights proposed (1861) ..	..	..	..	
Umur Banks Lt. Vessel One fixed bright light	41 9.3 29 4.7	W. part.....	..	49	4	1857
Therapia		2 green lts. proposed (1861) in Battery.....	..	..	..	
Jeron Point		2 red lts. proposed (1861) in Fort ..	..	..	..	

BLACK SEA.

ROUMILI One fixed bright light	41 14.2 29 7.	European side of Mouth of Bos- phorus	..	190	18	1830 1856
ANATOLIA One fixed and flash. lt.	41 12.8 29 10.2	Asiatic side of Mouth of Bos- phorus. Red flash and two br. flashes every 2 min.	..	294	20	1830 1856
KARA BURUN One flash. light, 10 secs.	41 19.3 28 41.	On the Cape	1c	302	22	1856
CAPE SHABLAH One fixed bright light	43 33.5 28 38.7	In Beacon Tower, 82 feet high..	..	120	10	1856
Kustenjeh One fixed bright light	44 10. 28 39.2	White tower, 45 feet high, on Cape	4a	68	9	1860
DANUBE RIVER One fixed bright light	45 9.4 29 40.5	White tower, 58 feet high, on S. side of Sulina, or Middle, entr.	..	65	15	1839 1856
FIDONISI One rev. br. lt., $\frac{1}{2}$ min.	45 15.6 30 12.7	White tower, 70 feet high, on summit of Island.....	..	195	18	1846 1856
Dniester River Two fixed br. lights	46 4.8 30 30.2	Mast, with three yards, with lights on the lowest, on Tsa- rigrad, or S. Pass	..	52	4	1817
ODESSA						
CAPE FONTANE One fixed bright lt.	46 22.6 30 46.9	White tower, 76 feet high, about 2 leagues S. of town	..	200	16	1834
Quarantine Mole Two fixed bright lts.	46 29.5 30 46.5	Vertical, on a Staff, on yellow building, 77 feet high.....	..	86 74	11 10	1834
Kinburn Light Vessel Two fixed bright lts.	46 35.5 31 30.4	Entrance of Dniaper Limani, 100 yds. from Kinburn Spit. Ver- tical lights	•	45 35	9	1834 1858

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
TENDRA ISLAND One rev. br. lt., 1 min.	46 19.4 31 31.5	13½ miles S., ½ W., from Kin- burn Fortress	●	84	15	1827
TARKAN CAPE One fixed bright light	45 20.8 32 30.	White tower, 113 feet high, on S.W. extremity	..	117	12	
Eupatoria		Building (1861)	..	..	..	
KHERSONESE One rev. br. lt., 2 min.	44 35. 33 22.7	White tower, 113 feet high, at entrance to Sebastopol	..	116	12	1846 1856
SEBASTOPOL Two fixed bright lights	44 37.2 33 35.3	One on high Cape, near Inker- man; the other at head of Harb., near Mount Mekenzieff; E. by S. and W. by N., 1½ m. apart	..	402 612	28 23	1847
AITODOR CAPE One fixed bright light	44 25.3 34 7.7	Tower, 88 feet high	..	343	21	
TAKLI One fixed pale light	45 6.6 36 27.2	Entrance to Kertch Straits	..	313	20	1847 1867
Trebizond		Building (1861)	..	..	..	
Bender Erekli One fixed bright light	41 18.1 31 26.	2½ miles N. of Cape Baba	..	656	8	1854
KILI CAPE One rev. br. lt., 1 min.	41 10. 29 38.2	Tower, 49 feet high	1b	221	25	1859

SEA OF AZOF.

YENI KALEH One fixed bright light	45 23.2 36 39.6	On Cape Fanar, N.W. entrance of Kertch Straits, 2½ miles from Fortress	..	342	21	1822
BERDIANSK One rev. br. lt., 1 min.	46 38.3 36 47.7	600 yards, E.N.E. ½ E., from end of Spit	..	85	10	
BIELOSARAI One fixed bright light	46 52.7 37 20.7	White tower, 79 ft. high, on Sandy Neck, 2,400 yards from end of Spit	..	74	10	1847 1856
Sazalnitzk Light Vessel Two fixed bright lts.	46 59.3 38 15.	Vertical; on S. side of Channel and of Spit. Removed, in winter, to Taganrog	..	34 22	7 6	1856
Golden Bank Lt. Vessel One fixed bright light	47 2.5 38 35.5	2 miles from Shoal, S.S.W. of Foursoff. Removed, in winter, to Taganrog	..	34	7	
Groteheskoi Light Vessel One fixed red light	47 2.7 38 46.4		..	..	..	
Petrouchina Light Vessel One fixed bright light	47 4.3 38 53.1		..	..	..	

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
------------------------------	------------------------------	------------------	-----------------------------	-----------------------	----------------------	----------------------

Alexandrette	36 35.5	Iakenderun Gulf, W. point of	..	..	..	1858
Two fixed bright lts.	36 16.	Road. For Mail Steamers ..				

Latakiyah	35 30.5	On the Castle, N. side	..	..	..	1842
One fixed bright light	35 46.					

EGYPT.

Port Said	31 16.	Wooden tower, on Beach	3a	66	9	1860
One fixed bright light	32 19.5					

NILE RIVER

Damietta Mouth	31 25.	Proposed (1861)	..	..	..	
	31 47.					

Rosetta Mouth	31 24.3	Proposed (1861)	..	..	..	
	30 28.					

ALEXANDRIA	31 11.1	White stone tower, Eunostos Pt.	..	180	20	1848
One fixed bright light	29 52.4					

TUNIS.

CAPE CARTHAGE	36 52.	Tunis Gulf	..	406	16	1840
One rev. br. lt., 1 min.	10 19.3					

Goletta	36 48.3	(Not lighted since 1852).	..	39	6	1850
One fixed bright light	10 18.7					

I CANI, AL KHELB, or DOG ROCKS	37 21.	White tower, 70 feet high, on highest Rock	2a	129	17	1860
One fixed bright light	10 4.6					

ALGIER.

PORT LA CALLE	36 54.	E. side of entrance	●	52	10	1844
One fixed bright light	8 26.2					

BONAH	36 54.5	On Lion Point, $\frac{1}{2}$ mile N.E. of	●	160	10	1841
One fixed bright light	7 46.3	Port				

HAMRAH, or CAPE DE GARDE	36 58.	Lighthouse, 43 feet high	2b	466	15	1841
One rev. br. lt., $\frac{1}{2}$ min.	7 47.2					

STORA GULF

Singes Island	36 54.3		●	118	8	
One fixed bright lt.	6 51.5					

Scrigina Island	36 56.3		●	180	10	
One fixed bright lt.	6 52.7					

Jijelli	36 50.	On second Rock from E.	●	49	8	1844
One fixed bright light	5 43.9					

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
Bougie One fixed bright light	36 45.5 5 5.3	On Fort Abd-el-Kader	●	128	3	
Bouac Fort		Red lt., 1 m. N.E. $\frac{1}{2}$ E. of Bougie	●	482	8	1854
CARBON CAPE One rev. br. lt., 1 min.	36 46.9 5 6.3	Tower, 35 feet high, on Cape ..	1b	722	27	1854
Dellis Point One fixed bright light	36 55.5 3 55.2		●	..	8	1844
ALGIER						
IT. DE LA MARINE One rev. br. lt., $\frac{1}{2}$ m.	36 47.3 3 4.3	White tower	2b	115	15	1834
N. Mole Head		Red light	●	36	3	1850
S. Mole Head		Green light	●	25	3	1854
SHERSHEL Two fixed bright lights	36 36.8 2 11.9	High light on Fort Joinville; the other on Pier	●	124 46	15 8	1843
Tenez One rev. bright light	36 32. 1 20.2	In front of town	●	131	8	1844
Mostaghanem One fixed bright light	35 55.1 0 5.4	On small tower, near Barracks	4a	121	10	1844 1859
Lat. N. Long. W.						
ARZEW Two fixed bright lights	35 51.6 0 17.2	In Fort on Point, and higher lt. on Islet.....	●	30 62	8 10	1841 1848
ORAN One rev. br. lt., $\frac{1}{2}$ min.	35 44.3 0 41.3	White tower on Fort Mers-el- Kébir	2b	118	15	
Honain, or Djama Gha- zaouat One fixed bright light	35 7. 1 52.3	E. Point of Bay	●	164	8	1848

MAROCO.

Melilla One fixed bright light	35 18. 2 57.	On Bastion, N.E. of Village....	..	..	5	
Al-Khuzemas, or Alhucemas One fixed bright light	35 13.4 3 53.	Torre Vigia	..	123	7	1852
CEUTA One rev. br. lt., 1 min.	35 53.9 5 17.5	Tower, 88 feet high, on Mosque- ros Hill, or Almina Point	1b	476	23	1855

Name and Character of Light.	Lat. N. Long. W. o /	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
Senegal One fixed bright light	16 0.8 16 31.	(French). Ile de St. Louis	..	..	6	
Gorée Island One fixed bright light	14 39.9 17 24.8	(French). In the Fort	..	..	6	
SIERRA LEONE One fixed bright light	8 30. 13 18.5	(British). White tower, 69 feet high, on the Cape. Green lt. at landing place	..	96	18	1849
MONROVIA One fixed bright light	6 19. 10 50.	(Liberian). Red tower, 40 feet high, on Cape Mesurado	..	240	15	1855
CAPE PALMAS One fixed bright light	4 22.1 7 44.3	(Liberian). Tower, 50 ft. high, on the Cape	..	110	13	
CAPE COAST CASTLE One fixed bright light	5 6.3 1 13.9	(British). White tower, 46 feet high, in Fort William	..	192	20	1847

ATLANTIC ISLANDS.

BERMUDAS. One rev. br. lt., 1 min.	32 15.1 64 51.6	A white iron tower, 106 ft. high, on Gibbs Hill, on S. side. Seen all round, except between S. 48° W., and S. 52° W.; and also S. 53° W. to S. 62° W. ..	●	362	24	1846
---------------------------------------	--------------------	--	---	-----	----	------

CANARY ISLES.

Santa Cruz One fixed bright light	28 28.6 16 14.9	(Spanish). Teneriffe Island; on Mole Head	..	36	5	1857
Anaga	27 35.2 16 5.7	Teneriffe Island. Proposed light on the Islet, 1860	..	..	..	
Grand Canary Island One fixed bright light	28 7.1 15 24.8	On the Mole, Palma town.....	..	..	..	1859

AZORES, or WEST-
ERN ISLANDS.

ST. MICHAEL Proposed fixed light	37 44. 24 41.2	(Portuguese). At Santa Clara Fort. Punto Delgada	..	..	..	
-------------------------------------	-------------------	---	----	----	----	------

Name and Character of Light.	Lat. S. Long. E. o /	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
TABLE BAY						
ROBBEN ISLAND	33 48. 18 22.7	Red light building, 1861, on highest part	1a	115	..	
MOUILLÉ POINT One fixed bright lt.	33 53.9 18 24.7	(To be altered to red light)	..	40	10	1844
GREEN POINT Two fixed bright lts.	33 54.1 18 24.1	Horizontal, in one tower	..	65	13	
CAPE OF GOOD HOPE One rev. br. lt., 1 min.	34 21.2 18 29.5	White tower, 30 feet high, on the Cape	1b	816	36	1860
SIMON'S BAY						
SOUTH ROMAN ROCK One rev. br. lt., $\frac{1}{2}$ m.	34 10.7 18 27.5	Building; to be lighted in 1861, to supersede the Light Vessel	3b	54	12	
S. Roman Rock Lt. V. One rev. br. lt., $3\frac{1}{2}$ m.	34 12. 18 27.5	200 yds. N. of Rock, in 19 fms. To be removed when lighthouse is lighted	..	37	10	1845
CAPE AGULHAS One fixed bright light	34 49.8 20 0.6	White and red striped tower, 100 feet high, on the Point ..	1a	128	18	1848
ALGOA BAY						
C. RECIFE One rev. br. lt., 1 m.	34 1.7 25 42.1	Tower, red and white, 80 feet high, on the Point	..	93	15	1850
Port Elizabeth		Fixed lt., building (to be lighted in 1861) on hill behind town	..	200	..	
BIRD ISLANDS Two fixed bright lts.	33 50.4 26 17.2	In one tower, on S. side	..	61 61	10	1852
BUFFALO RIVER One fixed bright light	33 0.7 27 58.7	East London. On Reef, S. side of entrance	..	45	11	1860
RÉUNION, or BOUR- BON ID.						
St. Denis Two fixed bright lights	20 51.5 55 30.2	12 feet apart vertically, on a Flagstaff on the Barachois ..	..	85	8	1846
BEL-AIR One fixed bright light	20 53.2 55 39.4	Tower, 66 feet high, on the Point	2a	151	18	1846
MAURITIUS ISLAND						
St. Louis One green and one red fixed light	20 9. 57 29.	Green light on Fort George, on Tonnelier Id. Red lt. on Mar- tello Tower, entr. of Gr. River	..	..	..	1856
CANNONIER POINT One fixed br. (& red) lt.	20 0.6 57 35.4	Appears red, when bearing N. of N.E. $\frac{1}{2}$ E.	..	38	10	1855
FLAT ISLAND One rev. br. lt., 1 min.	19 53.4 57 44.2	S.W. Angle	..	365	25	1855
ARABIA, S. Coast						
Aden Light Vessel One fixed bright lt.	12 47. 45 1.3	In 24 feet, S. side of Inner Harbour	..	35	7	1850

Name and Character of Light.	Lat. N. Long. E. o	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
RED SEA.						
PERIM ISLAND	12 38.	Building, 1861	..	..	..	
One rev. bright light	43 23.					
DÆDALUS SHOAL	24 55.	Building, 1861	2a	..	12	
One fixed bright light	35 50.					
JUBAL STRAIT	27 43.	On Ushruffee Reef	1b	..	18	1861
One rev. bright light	33 43.					
ZAFARINA POINT	29 5.1	Building, 1861	1a	..	13	
One fixed bright light	32 40.					
Suez Light Vessel	29 54.8	E. side of Harbour	..	..	6	1856
One fixed bright light	32 36.3					

INDIA,**W., and Malabar Co.**

KURRACHEE, or KARACHI	24 47.3	On Fort Manora Point, W. entrance of Indus River	..	120	16	1851
One fixed bright light	66 58.3					
MANDAVER	22 49.7	Entrance to Gulf of Kutch; on S.W. Bastion of Fort.	..	80	16	1853
One fixed bright light	69 20.4					
CAMBAY GULF						
PERIM ISLAND	21 35.	On a Mast	..	66	12	1851
One fixed bright lt.	72 20.					
Gogah	21 40.5	A small fixed light	..	..	..	1856
	72 16.5					
KOON BUNDER	22 17.	W. bank of Sabermutty River. Sept. 1 to June 15	..	48	10	1856
One fixed bright lt.	72 18.3					
DEOJUGAN, or TANKARIA	21 55.	N. Bank of Dhardur River	..	50	10	1856
One fixed br. light	72 30.5					
Bleagura Dandee	21 19.7		..	..	..	1856
One fixed br. light	72 35.					
TAZTEE	21 5.	N. shore of Mouth of River, on a Mast	..	61	10	1852
One fixed br. light	72 37.5					
BOMBAY						
COLABA LT. VESSEL	18 50.	In 7 fms., $4\frac{1}{2}$ miles S.S.W. from Colaba Pt. A blue light every hour, and false fire every $\frac{1}{2}$ hour	..	60	12	1842
One fixed br. light	72 47.5					
Shannon	18 53.5	$\frac{1}{2}$ mile S. of sunken Rock	..	..	..	
One fixed br. light	72 50.					
COLABA POINT	18 53.7	White tower, 89 feet high, on the Point	..	132	17	1847
One rev. br. lt., 2 m.	72 47.7					
Dolphin Rock		One fixed green light	..	20	2	1857
GOA	15 28.5	Flagstaff on Aguada Fort, on a Hill behind the town	..	280	12	
One rev. br. lt., 7 (P) m.	73 46.					

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
Coumta One fixed bright light	14 25. 72 22.5	Lantern on a Column.....	..	180	..	1855
MANGALORE One fixed bright light	12 51.5 74 49.4	Tower, 50 feet high	..	250	16	1851
CANNANORE One fixed bright light	11 51.3 75 21.7	Not shown during S.W. Mon- soon	..	110	12	1843
TELLICHERRY Two fixed bright lights	11 44.8 75 28.5	12 yards apart, vert. Not shown during S.W. Monsoon	..	40 104	12	1835 1846
CALICUT One fixed bright light	11 15.2 75 45.6	On a Column, 110 ft. high, near the Beach. Not shown during S.W. Monsoon	..	105	12	1847
COCHIN One fixed bright light	9 58.1 76 13.9	On a Staff.....	..	67	12	1839

CEYLON.

COLOMBO One fixed bright light	6 56. 79 50.2	In Clock Tower. (Removed from W. Bastion.)	..	132	16	1860
POINT DE GALLE One fixed bright light	6 1.4 80 11.2	On S. Bastion	..	100	12	1848
GREAT BASSAS LT.V.	6 11. 81 28.	Proposed, 1861	..	..	..	
TRINCOMALEE Flagstaff Point	8 33.7 81 14.7	Lantern, in Fort Frederick. (Will be discontinued when Foul Pt. and Round Id. lts. are lighted.)	..	206	7	1845
FOUL POINT One rev. br. lt., 1 m.		Building, 1861	2b	..	18	
ROUND ISLAND One fixed red light One fixed green light		Building, 1861, red lt. between S.W. and W. by S. $\frac{1}{2}$ S. Green light to lead into Harbour ..	4a	..	10	

Coromandel Coast.

TUTICORIN One fixed bright light	8 47.3 78 10.9	Obelisk, 37 ft. high, on Hare Id., $2\frac{1}{2}$ miles E. of Tuticorin	..	43	12	1845
PALK BAY One fixed bright light	9 17.5 79 12.6	Round tower, 41 ft. high, 1 m. E. of Paumben Pass	..	84	12	1845
NEGAPATAM One fixed bright light	10 44.8 79 50.2	Lowered to 88 feet during N.E. Monsoon	..	100	12	1846
Karikal One fixed bright light	10 55. 79 44.	On a Flagstaff.....	..	65	8	1853
PONDICHERRY One fixed bright light	11 55.7 79 49.9	In the Square	..	131	15	1836
MADRAS One fixed and flash. lt.	13 5.2 80 14.	Column, 125 ft. high, on Espla- nade N. of Fort. Flash every 2 min.	..	132	24	1844
Pulicat	13 25. 80 19.7	Building, 1861.....	..	..	..	

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
ARMEGON SHOAL One fixed bright light	13 52.8 80 12.	Village of Moona, or Moona- polium, 1 mile in shore	..	95	15	1853
MASULIPATAM One fixed bright light	15 58.9 81 9.5	2 miles N.W. of Point Divy....	..	90	12	1851
GODAVERY, or GOR- DEWARE, PT. One fixed bright lt.	16 49.1 82 18.4	White tower, 60 ft. high, $1\frac{1}{2}$ m. W. by N., on Hope Id., Corin- gah Bay	..	73	15	1817
SANTIPILLY One fixed bright light	18 3.5 83 36.6	On Conada Hill, $\frac{3}{4}$ mile in shore	..	150	14	1849
FALSE POINT One fixed bright light	20 20. 86 47.3	2 miles S.W. of Point.....	..	120	18	1838
PILOT RIDGE LT. VESSEL One fixed bright light	20 49.5 87 42.	Moored in 21 $\frac{1}{2}$ fms. during S.W. Monsoon. Blue lt. and a ma- roon alternately every $\frac{1}{2}$ hour	..	..	..	1851
HOOGLY RIVER LT. VES. One fixed bright light	21 4. 88 14.	From October to March in 7 $\frac{1}{2}$ fms. at entrance to E. channel, with maroon or torch every $\frac{3}{4}$ hour, and blue lt. every hour. From March 15 to Sept. 15 is removed to lat. 21° N., with blue lt. every $\frac{1}{2}$ hour, and ma- roon every $\frac{1}{4}$ hour	..	..	..	1843
HOOGLY RIVER LT. VES. One fixed bright light	21 26.3 88 6.7	In Gaspar Channel. Blue lts. and maroons alternately	..	..	..	
Mutlah River Lt. Vessel One fixed bright light	21 6. 88 48.	In 9 fms.; temporary. From Mar. 16 to Oct. 16, a rocket at 8 p.m., midnight, and 4 a.m.	..	30	7	1857
SAUGOR ISLAND One br. rev. lt., 20 secs.	21 38.7 88 5.	Iron tower, 82 feet high, on Mid- dleton Point.....	..	88	15	1852
COWCOLLY, or KEDGEREE One fixed bright light	21 50.3 87 57.1	2 miles S.W. of Point	..	62	15	1810
BAY OF BENGAL,			East Coast.			
KOOTUBDEAH ID. One fixed bright light	21 52.5 91 51.	Tower, 106 feet high, on W. part	..	120	18	1846
ARRACAN, or AKYAB, RIVER One fixed bright light	20 5.3 92 56.5	Tower, 50 feet high, on Great Savage Id., S. entrance	..	106	15	1844
BORONGO, W. ID. One fixed bright light	20 1. 92 56.	Summit of Table-land	..	..	..	1859
TERRIBLES	19 22. 93 16.	Proposed (1861) off Kyouk Phyou	..	..	..	
ALGUADA REEF	15 42. 94 13.	Proposed (1861) on Cape Ne- grais	..	..	..	

Name and Character of Light.	Lat. N. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
RANGOON Elephant Point	16 28. 96 23.	Proposed (1861)	..	..	..	
Light Vessel One fixed bright lt.	16 19. 96 20.5	In 3½ fathoms, at entrance. <i>Blue</i> light every hour	..	..	..	
AMHERST POINT One fixed bright light	16 5. 97 39.		..	..	10	
Double Isle	15 54. 97 39.5	Proposed (1861) on N. Point ..	..	..	..	
MALACCA STRAIT LIGHT VESSEL One fixed bright lt.	2 52.5 100 58.3	In 4 fms., on W. part of One Fathom Bank. (To be replaced with a pile Lighthouse)	..	..	12	1852
MALACCA One fixed bright light	2 12.5 102 15.2	On St. Paul Hill	..	180	16	349
RAFFLES One fixed bright light	1 8.3 103 44.6	White tower, 91 feet high, on Coney Islet, Straits of Singa- pore	..	105	12	1855
Singapore One fixed bright light	1 16.3 103 51.3	Flagstaff, on Government Hill	..	226	7	1855

EAST INDIAN ISLANDS.

HORSBURGH, or PEDRA BRANCA One rev. br. lt., 1 min.	1 20.3 104 25.1	White tower, 93 feet high, on summit of Rock	..	95	15	1851
---	--------------------	---	----	----	----	------

Lat. S.
Long. E.

JAVA

ANJER One fixed bright lt.	6 4.8 105 56.6	Straits of Sunda. On Point, 5 m. S.W. of the Port	..	96	16	1855
Anjer Two fixed bright lts.	6 3.2 105 57.	On each Pier, at the Village ..	..	35	4	1856
Batavia	6 8. 106 52.	Proposed (1861)	..	..	..	

BANKA STRAIT

Tober Ali	3 1. 106 28.	Proposed (1861) in the Fort ..	..	..	..	
Pulo Dahan Lt. Vessel	2 55. 106 11.	Proposed (1861) 4½ m. S. of Islet, in Stanton Channel	..	..	..	
KALIAN One fixed bright lt.	2 6. 105 19.	Building (1861) on the Point ..	2a	160	16	
Mintok	2 5.5 105 11.	Building (1861) on the end of Pier	..	..	..	

Name and Character of Light.	Lat. N. Long. E.	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
PHILIPPINE IDS.						
Zebu Port One fixed bright lt.	10 21.5 123 49.4	Dapdap Point, N.E. entrance..	..	49	4	1857
Romblon Island One fixed bright lt.	12 37.6 122 15.9	Sabang Point, N. entrance	..	..	..	1857
CORREGIDOR ID. One rev. br. lt., 1 m.	14 23.1 120 33.5	Manila Bay. On summit of Island	2b	639	20	1853
Caballo Island One fixed bright lt.	14 22.3 120 36.	Manila Bay	4a	345	9	1853
MANILA One fixed bright lt.	14 36.2 120 56.6	N. shore of Canal	..	51	10	1846

CHINA.

CANTON RIVER		Tworeed lts., on Dutch Folly Fort	..	..	..	1859
PRATAS SHOAL	20 42. 116 43.5	Proposed (1861)	..	..	..	
Swatow, or Shantau One fixed bright light	23 20. 116 43.7	Double Island. (Doubtful) ..	..	..	..	1858
TAETAN ISLAND.	24 24.5 118 9.3	Building (1861) on N.W. Id...	..	..	..	
Pescadores	23 33. 118 9.3	Fisher Inlet. (Occasional) ..	..	225	..	
Yang-tse-Kiang Lt. Ves. One fixed bright light	31 9.3 121 59.	In 4½ fms., S.W. end of Tungsha Banks. A gun	..	..	..	1855

KAMCHATKA.

AVATCHKA GULF						
DALNI One fixed br. light	52 52.8 158 47.	E. side of entrance	..	449	24	1851
BABUSHKIN PT. One fixed br. light	52 54.7 158 42.6	On second Point, W. side of entrance	..	294	19	
RAKOF One fixed br. light	52 57.5 158 43.6	½ mile S. of entrance to Rakovya Harbour	..	378	22	

W. AUSTRALIA.

	Lat. S. Long. E.					
ROTTNEST ISLAND. One rev. br. lt., 1 min.	32 0. 115 31.2	White tower, 64 feet high, on centre of Island	..	197	20	1850
SWAN RIVER One fixed bright light	32 3.2 115 45.1	Arthur Head	..	92	14	1851
KING GEORGE SOUND.						
BREAKSEA ID. One fixed br. light	35 4.3 118 3.3	1,200 yards, with E. end	..	384	24	1858
PRINCESS ROYAL HARB. One fixed bright lt.	35 2.6 117 55.2	Point King, N. entrance	3a	37	10	1858

Name and Character of Light.	Lat. S. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
BORDA, or FLINDERS CAPE One rev. br. & red lt., $\frac{1}{3}$ m.	35 45.3 136 38.	N.W. Point of Kangaroo Id. Alternately bright and red ..	●	510	30 15	1858.
ST. VINCENT GULF TROUBRIDGE SHOAL One intermit. br. lt.	37 5.8 137 12.	Centre of Id. Bright 24 secs., dark 36 secs.	2b	80	16	1856
PORT ADELAIDE Lt. V. Two fixed br. lights	34 47. 138 30.	In 5 fathoms, 1 mile S.W. of Bar	●	38 29	10	1849
Lefevre's Peninsula One fixed red light	34 50. 138 31.	End of Jetty. Pilot Station ..	..	..	3	1860
Glenelg Jetty One fixed red, & a br. lt.	34 59.5 138 33.	Outer Jetty. Lights vertical. For Mail Steamers	..	29 20	6	1859
STURT One rev. br. lt., $\frac{1}{3}$ min.	35 51.6 138 10.8	White tower, 75 feet high, on S.E. Point of Kangaroo Id. ...	●	295	24	1852
CAPE NORTHUM- BERLAND One rev. br., red, and green lt.; 1 min.	38 3. 140 37.7	Bright, red, and green, alter- nately	●	123	18 15 8	1859
C. BRIDGEWATER One fixed bright light	38 22. 141 19.	Building (1861).	..	..	..	
PORTLAND BAY One fixed red, & 1 green light	38 22. 141 39.	Red light on Observatory Hill; green light on Old Jetty	4a	116	13 4	1859
Port Fairy One fixed & flash. red lt.	38 24. 142 20.	S.E. part of Rabbit Island Br. (?) with red flash every 4 m.	4d	41	9	1859
WARRNAMBOOL, or LADY BAY One fixed br., & 1 red lt.	38 26. 142 32.	Br. lt. on centre of Middle Id. Red Harb. lt. at Head of Bay	4a ..	78 ..	13 ..	1859 1860
BASS STRAIT CAPE OTWAY One rev. br. lt., 1 m.	38 51. 143 33.	White tower, 52 feet high, on S.W. extremity	●	300	24	1848
KING ISLAND One fixed br. light	39 35. 143 57.	Proposed (1861), on N. Point, C. Wickham	●	300	24	
PORT PHILIP SHORTLAND BLUFF One fixed red, & One bright light	38 16.5 144 43.3	2 m. within entrance, S.W. by S. and N.E. by N., 223 yds. apart		109 80	16 10	1842 1854
Swan Spit One fixed red light		On Piles, in 15 feet, on S.W. end of Spit. Gong	..	..	8	1860
W. Channel Lt. Ves. Two fixed bright lts.		In 3 fathoms, at N.E. end of W. Channel. Fog bell	..	50	9	1854
Geelong Lt. Vessel One fixed bright lt.		In 2 fms., near Bird Rock, Corio Harb. 2 red lts., shown if Lt. Vessel breaks adrift	..	27	7	1857

Name and Character of Light.	Lat. S. Long. E. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
BASS STRAIT						
PORT PHILIP						
<i>Geelong Pier Head</i> ..		Fixed bright light	..	..	3	1857
MELBOURNE LT. VES. One rev. bright lt.	37 53. 144 55.3	In $4\frac{1}{2}$ fathoms, off Gellibrand Point	..	40	10	1859
Sandridge ..		Red light on Jetty; green lt. on Rwy. Pier	..	..	3	1857
Williamstown ..		Red light on old Jetty	..	..	3	1857
CAPE SCHANK						
One fixed & flash. lt.	38 30. 144 54.	On S. extremity. Flash every 2 min.	1d	238	23	1859
WILSON PROMON.						
One fixed bright lt.	39 8. 146 23.	On S.E. part	1a	342	24	1859
PORT ALBERT						
One fixed and flash. red light	38 46. 146 38.	E. part of Latrobe Island, Corner Inlet	4d	40	9	1859
DEAL ISLAND						
One rev. br. lt., $1\frac{1}{2}$ m.	39 29. 147 21.6	On summit of S.W. side (often hidden by fogs).	●	950	36	1846
CAPE HOWE						
One fixed bright lt.	37 35. 149 56.2	On Gabo Id., $5\frac{1}{2}$ miles S.W. of Cape. (A new tower building (1861) on S.E. Pt. of Id.). ..	1a	179	17	1856
JERVIS BAY						
One rev. br., red, and green light, $\frac{1}{2}$ min.	35 9.3 150 47.1	2 m. N. of Cape St. George. Br., red, and green alternately	1b	224	18	1860
PORT JACKSON						
S. HEAD						
One rev. br. lt., $1\frac{1}{2}$ m.	33 51.2 151 19.8	Macquarie Tower	●	344	21	1817
HORNBY						
One fixed bright lt.	33 50.7 151 18.7	Inner S. Head	●	90	14	1858
Sow & Pigs Shoal Lt. V.						
Two fixed bright lts.	33 50.1 151 19.	In 22 feet, on N.W. edge of Shoal. Lights vertical	..	26	6	1836
Fort Denison ..		Fixed red light on Tower	..	..	..	1858
NEWCASTLE, or PORT HUNTER						
One fixed bright light	32 55.3 151 48.8	Nobby Head	●	..	30	1858
MORETON BAY						
One rev. br. lt., 1 min.	27 2.3 153 28.6	White tower, 70 feet high, on N.E. Point of Moreton Id. ..	●	382	26	1857

Name and Character of Light.	Lat. S. Long. E.	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
------------------------------	---------------------	------------------	-----------------------------	-----------------------	----------------------	----------------------

TASMANIA.**BANKS STRAIT**

GOOSE ISLAND	40 18.7	Red and wh. tower, 74 ft. high.	1a	135	20	1846
One fixed bright lt.	147 48.	Chappel Id., near S. Point ..				
SWAN ISLAND	40 44.	Red and white tower, 74 feet	1b	110	14	1845
One rev. br. lt., 1 m.	148 9.	high, on N. Point				
DALRYMPLE PORT	41 3.4	Low Head, E. entrance to Tamar	●	142	15	
One rev. br. lt., 1½ m.	146 48.3	River				
D'ENTRECASTEAUX CHAN.	43 29.	Cape Bruni, S.W. Point	●	335	22	1838
One rev. br. lt., 1½ m.	147 8					
HOBARTON	43 3.	Red tower, 40 ft. high, on Iron	a	65	14	
One fixed bright light	147 33.	Pot Id., Mouth of R. Derwent				

NEW ZEALAND.

PORT NICHOLSON	41 22.	Cook Strait, N. Island. Pen-	2a	420	30	1859
One fixed bright light	174 51.2	carrow Head, Wellington ..				
Nelson Harbour	41 16.	Middle Island. Entrance of	..	..	..	1852
One fixed red light	173 17.5	Harbour				
OTAGO	45 47.	Middle Island. Tairoa Head..	..	244	10	1850
One fixed bright light	170 44.8					

BRITISH AMERICA. LIGHTHOUSES. NEWFOUNDLAND. 111

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
BELLE ISLE One fixed bright light	51 53. 55 22.3	White tower, 62 feet high, on S. Point of Id., Straits of Belle Isle. Gun in fogs	1a	470	28	1858
AMOUR POINT One fixed bright light	51 27.6 56 50.9	White tower, 109 feet high, on the Pt., S.E. side of Forteau Bay. Whistle or gun in fogs	2a	155	18	1858
OFFER WADHAM ISLAND One fixed bright light	49 36. 53 46.	Circular brick Tower, on the Island	a	96	12	1858
CAPE BONA VISTA One rev. lt., br. and red alternately, 2 min.	48 42. 53 8.	Tower, 36 feet high, striped red and white vertically, on Cape. (Lt. apparatus from Bell Rock, E. of Scotland.)	●	150	30	1843
GREEN ISLAND One fixed bright light	48 30.7 53 6.3	S. side of Catalina Harbour, in Trinity Bay	●	86	15	1857
BACALHAO, or BAC- CALIEU ID. One rev. br. lt., 20 s.	48 9. 52 48.7	On N. end of Island. Holo- photol apparatus	1b	380	30	1858
HARBOUR GRACE One fixed bright light Two fixed lts. on Beach beacon	47 42.7 53 9.3	One light on Id. at entrance, 4 miles from the town. 2 lts., 11 yds. apart, on Point of Beach Entrance	● ●	150 50	20 10	1836 1853
St. JOHN'S One fixed bright light	47 33.8 52 39.9	On Fort Amherst, S. entrance of Harbour. Gun in fog	4a	110	12	1852
CAPE SPEAR One rev. br. lt., 1 min.	47 30.9 52 36.7	Square tower, 38 ft. high, striped red and white horizontally, on Cape	●	275	30	1835
CAPE RACE One fixed bright light	46 39.2 53 2.6	Tower on Cape, with S.E. side striped red and white vertically	..	180	17	1856
CAPE PINE One rev. br. lt., $\frac{1}{2}$ min.	46 37.1 53 31.8	Round iron tower, 56 feet high, with red and white bands, on the Cape	●	314	30	1851
CAPE ST. MARY One rev. lt., br. and red alternately, 1 min.	46 49.4 54 9.5	Light building (1861)	1b	..	..	
GREAT BURIN ID. One rev. br. lt., 20 secs.	47 1.5 55 5.	On Dodding Head	2b	410	30	1858
ST. PIERRE ID. Two fixed bright lights	46 45.5 56 6.9	(French). One on Galantry Hd.; the other on Canon Point, St. Pierre Harb., from May to Decr.	2a ●	210 ..	18 3	
Gulf of St. Lawrence.						
ST. PAUL ID. One fixed br. lt., N. end One br. rev. lt. 1 min., on S.W. Point	47 13.8 60 8.3	Fixed lt., on a Rock; revol. light on S.W. Point. At the latter a fog bell and gun		144 140	20 20	1839 1831
MAGDALEN IDS.	47 50.9 61 9.2	Light on Bird Rocks, proposed (1861)		..	..	

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
CAPE ROZIER One fixed bright light	48 51.6 64 12.	White tower, 112 feet high, on the Cape	1a	136	20	1858
ANTICOSTI ID.						
HEATH POINT One fixed bright lt.	49 5.3 61 41.8	Grey conical tower, 90 ft. high; from April to December	●	110	15	1831
S.W. POINT One rev. br. lt., 1 m.	49 23.7 63 35.8	Conical grey tower, 75 feet high	●	100	15	1831
W. POINT One fixed bright lt.	49 52.5 64 32.	Round white tower, 109 feet high	2a	112	15	1858
POINT DE MONTS One fixed bright light	49 19.6 67 22.	Round white tower, 75 feet high, 1½ mile N.E. of Point	..	100	15	1830

River St. Lawrence.

FATHER POINT One fixed red light	48 31.4 68 27.4	Rimousky. From April 10 to December 10	..	43	10	1859
BICQUETTE ID. One rev. br. lt., 2 min.	48 25.2 68 53.5	On W. Point. Hour gun, during fogs and snow	..	112	15	1844
RED ISLET BANK One fixed red light	48 4.3 69 33.1	On S.W. Point	..	75	12	1848
GREEN ISLAND One fixed bright light	48 3.3 69 25.2	On N. Point. From April 15 to December 10	..	60	13	1809
St. TRVERSE Lt. Vess. Two fixed bright lts.	47 22.2 70 15.1	N.E. part of St. Rocque Shoals	..	..	9	1830
STONE PILLAR One rev. br. lt., 1½ min.	47 12.4 70 21.8	100 yards from S. Point of Ialet. From April 15 to December 15	..	68	13	1843

Note.—The Lights on the upper part of the River St. Lawrence, and those on the Great American Lakes are omitted, as not being of service to oversea vessels.

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
NEW BRUNSWICK.						
MISCOU ISLAND One fixed red light	48 1. 64 29.5	White tower, on Birch Point ..	..	79	12	1856
MIRAMACHI BAY One fixed bright lt.	47 4.5 64 47.6	White tower, on Escumenac Point	●	70	14	1841
Shediac One fixed light	46 14.6 64 31.5	A lantern, on Chene Wharf, in the Summer.....	..	15	6	1860
NOVA SCOTIA.						
PICTOU HARBOUR One fixed br. lt., and one red light	45 41.4 62 39.5	Tower, str. red and white, ver- tical. S. Point of entrance. Lower light red	●	65	11	1834
PICTOU ISLAND One fixed bright lt.	45 49.8 62 30.2	White tower, on E. Point.....	..	52	12	1853
CANSO GUT N. ENTRANCE One fixed bright lt.	45 41.7 61 28.9	White tower, on W. side, 120 yards in shore	●	110	18	1842
S. ENTRANCE Two fixed bright lts.	45 31.5 61 14.6	Tower white, with black dia- mond, on Eddy Point, 8 yds. apart	..	25	8	1851
Prince Edward Island.						
Bedeque Harbour One fixed bright light	46 23.5 63 47.5	A lantern, on Green's Wharf, when practicable	..	15	7	1856
Charlotte Town One fixed bright light	46 11.6 63 7.4	Blockhouse Pt., W. side of en- trance to Harbour	..	35	9	1856
HILLSBORO' BAY One fixed bright light	46 3.2 63 2.1	White brick tower, on Prim Pt., S.E. of Bay	●	68	13	1845
CARDIGAN BAY One fixed bright light	46 8.8 62 27.7	On Panmure Head, S. entrance of Georgetown Harbour	●	89	14	1853
Richmond Bay One fixed bright light	46 34.7 63 42.8	On Bill Hook, or Fishing Id., N. entrance	..	20	8	1856
Casumpeque One fixed bright light	46 48.4 62 2.1	White tower, on Sandy Island, on N. side	●	32	8	1856
Breton Island.						
PORT HOOD One fixed br. or red lt.	46 0. 61 31.6	White tower, S. entrance. Light red to N., and br. to S.	..	54	10	1854

Note.—The lighthouses of Nova Scotia and New Brunswick, where necessary, are painted with black or red stripes, &c., to distinguish the towers from the land; as, after the snow is gone off the land, the accumulations against the fences, which generally run at right angles to the coast, and which continue for some time after it has disappeared from the fields themselves, have exactly the appearance of a white tower, and frequently mislead even those acquainted with the coasts.

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
SEA WOLF, OR MARGARIE ISLAND One fixed bright lt.	46 21.5 61 15.5	White tower, on Summit, or Middle of Island.....	..	298	21	1854
SYDNEY One fixed bright light	46 16.2 60 7.3	Tower, red and white, vert. Flat Point, E. side of Spanish Bay	●	70	14	1832
FLINT ISLAND One revolving light	46 11. 59 45.8	Flash every 15 secs.	..	65	12	1856
SCATARI ID. One rev. bright light	46 2.2 59 40.3	White tower, on Trap Rock, N.E. Pt. Bright, 1 min.; dark, $\frac{1}{2}$ m.	●	90	15	1839
LOUISBURG One fixed bright light	45 54.6 59 57.2	Tower, wh., with bl. vert. stripe on S.E. Point of entrance	..	85	16	1842

NOVA SCOTIA.

Guysboro Harbour One fixed bright light	45 22.8 61 29.1	W. side of entrance; near Peart Point, Chedabuctoo Bay	●	30	8	1846
Arichat Harbour One fixed bright light	45 29. 61. 1.8	Tower, white, S. entrance; on Marache Pt., Madame Island	..	34	8	1851
CAPE CANSO Two fixed bright lts.	45 19.8 60 55.4	In one tower; str. red and white horiz.: on N. part of Cran- berry Island	●	75 40	15 9	1815
WHITE HEAD ID. Revolving lt., 20 secs.	45 12. 61 8.	White tower, on S.W. extremity	..	55	11	1853
BEAVER IDS. One rev. br. lt., 2 min.	44 49.6 62 20.2	Tower, white, with 2 black balls, on S.E. part of E. Beaver, or William Island	●	70	12	1846
HALIFAX						
Devil Island One fixed red light	44 34.8 63 27.9	Tower, red, with white belt, at E. entrance	..	45	8	1852
Sherbrook Tower One fixed bright light	44 36.6 63 31.9	Tower, white, with red roof, on Mauger Beach, E. side of entr.	..	58	10	1815
SAMBRO ID. One fixed bright light	44 26.2 63 33.6	White tower, on middle of Id.	..	115	20	1758
MALAGUASHI, or LU- NENBURG BAY One rev. light, 1 min. One fixed bright light	44 20. 64 7.	Tower, red. Upper lt. br. 45 secs., dark 15 secs.; 33 feet above lower light	●	90 56	14 8	1832
CAPE LE HEVE One rev. lt., $\frac{1}{2}$ min.	44 15.7 64 16.5	White tower, on S. side of Ironbound Island	..	70	13	1855
METWAY, or MEDWAY HEAD One fixed bright lt.	44 6. 64 34.	Tower, white, with black square, on W. side of entrance	..	44	10	1851
LIVERPOOL BAY						
COFFIN ISLAND One rev. br. lt., 2m.	44 3. 64 36.	Tower, striped red and white horizontally, on S. Point	..	80	16	1812
Fort Point One fixed bright lt.	44 3.7 64 39.	White tower, on Fort Point....	..	30	7	1855

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus.	Height above H. W.	Visible in Miles.	Year established.
RUGGED ISLAND HARB. One fixed bright light	43 36. 65 6.	White tower, on the Gull Rock	..	51	10	1853
SHELBURNE Two fixed bright lts.	43 37.5 65 16.5	Tower, striped bl. and wh. vertically, on Cape Roseway, Mac-nut Id. Lts. vert., 38 ft. apart	..	190 62	18 10	1858
PORT LATOUR One rev. lt., 4 secs.	43 26.9 65 28.7	Tower, white, with black ball, on Baccaro Point, E. side	..	49	12	1850
PUBLICO Harbours One fixed red light	43 35.7 65 47.	White tower, on Beach Point, S.E. side of entrance	..	28	8	1854
Bay of Fundy.						
SEAL ISLAND One fixed bright light	43 23.6 66 1.3	White tower, $\frac{1}{2}$ mile inland of S. Point	●	98	18	1890
YARMOUTH, or CAPE FOURCHU One rev. br. lt., $1\frac{1}{2}$ m.	43 47.5 66 9.8	Tower, striped red and white vertically, on S. Point of E. Cape	●	117	20	1889
BRYER ISLAND One fixed bright light	44 14.9 66 23.5	White tower, on W. Point	●	66	15	1832
PETER ISLAND Two fixed bright lights	44 15.5 66 20.9	White tower, S. entrance to Grand Passage. Lts. horizontal	..	40	10	1850
DIGBY, or ANNAPO- LIS	44 40.8 66 47.3	Tower, striped vertically, on S. Point of entrance	●	76	13	1817
Marshall Cove, or Port Williams One fix. br. (or green) lt.	44 56.8 65 16.	Appears green within four miles	..	..	5	1859
Margaretville One fixed br. (or red) lt.	45 3. 65 4.	Appears red within four miles ..	..	..	5	1859
BLACK ROCK POINT One fixed bright light	45 10.8 64 48.	White tower, on S. Shore	..	45	12	1848
HORTON One fixed bright light	45 6.3 64 2.	White tower, on the Bluff	..	95	20	1851
BASON OF MINES One fixed bright light	45 18.3 63 46.9	White tower, on Burnt Coat Head	..	75	13	1859
Parsborough One fixed bright light	45 23. 64 8.	White tower, on Partridge Id., on W. side of River	..	30	9	1852
APPLE RIVER Two fixed bright lts.	45 26. 64 50.	White tower, on Cape Capstan. Horizontal lights, 24 ft. apart	..	40	10	1848
GRINDSTONE ISLAND One fixed bright light	45 43.2 64 37.4	White tower, on W. part of Island	..	60	12	1859

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Viable in Miles.	Year established.
CAPE ENRAGÉ One fixed bright light	45 36. 64 46.7	Square white tower, on the Cape	●	151	15	1840
QUACO One rev. hr. lt., 20 secs.	45 19.6 65 31.9	Tower, red and white horizontal bands, on Rock off the Head	..	70	15	1848
ST. JOHN'S HARB.						
PARTRIDGE ISLAND One fixed bright lt.	45 14. 66 3.5	Tower, striped vertically red and white. Steam whistle every min. in fogs. Bell buoy near	●	119	20	1832
Beacon Tower One fixed bright light		Striped vertically, white and red	●	35	10	1828
LEPREAU Two fixed bright lights	45 3.8 66 27.1	Tower, striped horizontally, red and white lts. vert., 28 ft. apart	..	81 53	15	1831
CAMPOBELLO ID. One fixed bright light	44 57.7 66 53.9	Tower, white, with red cross, on N. Point	●	64	15	1829
PORT ST. ANDREW One fixed bright light	45 4.2 67 4.	N. Point of entrance	..	35	10	1833
GREAT MANAN ID. One fixed bright light	44 45.7 66 44.	Swallow's Tail, N.E. part, build- ing, 1861	..	148	17	
MACHIAS ISLANDS Two fixed bright lights	44 30. 67 5.5	On E. Id. Gun in fogs. Lts. E.S.E. and W.N.W., 55 yards apart	..	58 54	15	1832
GANNET ROCK One rev. light, 20 secs.	44 30.7 66 46.8	Tower, half blk. half wh., vertic., on S. part. Flash every 20 secs.	..	66	12	1831

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
WEST QUODDY HEAD One fixed bright lt.	44 49. 66 57.	Near East Port, S. side. Fog bell	3a	133	17	1808
LITTLE RIVER One fixed and flash lt.	44 39.4 67 10.6	On Island, at entrance. Flash every 1½ min.	5d	40	12	1855
Round Island		In Machias Bay. Proposed (1861) ..	..	..	..	
LIBBY ISLAND One fixed bright light	44 34.1 67 21.2	In Machias Bay. Grey tower, 35 feet high. Fog bell	4a	52	13	1856
MOOSE PEAK One rev. br. lt., 30 s.	44 28.9 67 31.7	White tower, 40 feet high, on Mistake Island	2b	65	14	1856
NASHES ISLAND One fixed & flash. red lt.	44 28.7 67 44.5	E. side of Pleasant River	4d	47	12	1858
NARRAGUAGUS One fixed bright light	44 29.4 67 49.5	Red tower, 29 feet high, on S.E. Point of Pond Island	5a	45	12	1856
PETIT MANAN One fixed and flash. lt.	44 22. 67 52.	Grey tower, 109 feet high, on S. end of Island	2d	125	17	1855
WINTER HARBOUR One fixed bright light	44 21.8 68 5.6	On S. Point of Mark Island. Frenchman Bay	5a	37	11	1856
MOUNT DESERT One fixed bright light	43 59.5 68 4.7	Grey tower, 60 feet high, on the Rock. Fog bell	3a	75	14	1857
BAKER'S ISLAND One fixed and flash. lt.	44 15.7 68 14.2	Off Mount Desert Id., Frenchman's Bay. Flash every 1½ m.	4d	105	17	1855
BEAR ISLAND One fixed bright light	44 19. 68 17.5	Cranberry Islands	5a	97	15	1856
BASS HARBOUR HEAD One fixed and flash. red light	44 16.5 68 23.6	E. side	..	56	13	1858
Spoon Island		Isle au Haut Bay. Building, 1861 ..	..	..	..	
PENOBSCOT BAY						
FLY, or GREEN ID. One fixed bright lt.	44 15.8 68 27.7	Edgemoggin Reach. On S.E. Point.....	4a	26	9	1856
SADDLEBACK LEDGE One fixed bright lt.	41 1.8 68 43.8	S.W. end of Isle au Haut Island	5a	51	13	1856
HERON NECK One fixed and flash. red light	44 2.2 68 51.	S. Point of Green Island	5d	92	10	1853
Widow Island		Proposed (1861)	..	..	..	
DEER ISLAND One fixed bright lt.	44 9.2 68 41.5	Mark Island, Isle au Haut Bay	4a	52	12	1857
EAGLE ISLAND One fixed bright lt.	44 13.2 68 45.	On Point of Island, Isle au Haut Bay	4a	106	16	1837
Pumpkin Island One fixed bright lt.	44 19. 68 45.	Guide to Buck Harbour	5a	27	9	1854

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
PENOBSCOT BAY						
MATINICUS ROCK Two fixed br. lts.	43 51.2 68 48.	N.N.W. and S.S.E., 60 yards apart. Fog bell	3a	85 90	15	1857
WHITEHEAD ISLAND One fixed bright lt.	44 0.3 69 6.	Fog bell	3a	70	13	1856
OWL'S HEAD One fixed bright lt.	44 6.2 69 1.	W. entrance. Fog bell	4a	100	16	1856
BROWN'S HEAD One fixed bright lt.	44 6.5 68 54.	S. Head of Fox Island	5a	39	12	1856
NEGRO ISLAND One fixed bright lt.	44 11.7 69 0.4	S. side of entrance to Camden Harbour	4a	52	12	1856
GRINDELS POINT One fixed bright lt.	44 16. 68 53.3	N. side of Gilkey Harbour, Long Island	5a	39	11	1856
DICE'S HEAD One fixed bright lt.	44 23.4 68 48.3	Near Castine, W. side of en- trance	4a	130	17	1858
FORT POINT One fixed bright lt.	44 28.3 68 48.7	Entrance of Penobscot River ..	4a	103	16	1857
TENANT HARBOUR One rev. br. lt., 1 min.	43 58.7 69 10.7	N.E. side of S. Island	5a	66	13	1857
MARSHALL'S POINT One fixed bright light	43 55.6 69 14.7	Entrance to Herring-gut Harb.	5a	31	10	1857
MANHEIGIN ISLAND One rev. br. lt., 1 min.	43 46.3 69 18.4	Fog bell, on Manana Island....	2a	175	19	1856
FRANKLIN ISLAND One fixed and flash. lt.	43 55. 69 23.3	N. end of Island, W. of entrance to St. George's River.....	4d	54	12	1855
PENMAQUID POINT One fixed bright light	43 50.4 69 28.5	S.W. entrance to Bristol Bay ..	4a	75	14	1857
BURNT ISLAND One fixed br. light	43 49. 69 37.1	W. side of Townsend Harbour..	4a	61	13	1858
HENDRICK'S HEAD One rev. br. lt., $\frac{1}{2}$ min.	43 51.2 69 40.5	E. side of Sheepscot River.....	4b	40	12	1851
POND ISLAND One fixed bright light	43 44.1 69 46.	W. entrance of Kennebec River. Fog bell	5a	54	13	1855
SEGUIN ISLAND One fixed bright light	43 42.4 69 45.2	Off Kennebec River. Fog bell	1a	180	20	1857
PORTLAND, or CASCO BAY						
C. ELIZABETH One rev. br. lt., 1 m. One fixed br. light	43 33.9 70 11.7	300 yards apart. Fog bell	2b ..	143 143	17	1858
PORTLAND HARBOUR One fixed br. light	43 37.4 70 12.6	On the Head, S. side. Fog bell	4a	81	14	1855
Breakwater		Red light on N.E. part	6a	23	8	1855
WOOD ISLAND One rev. red lt., 1 min.	43 27.4 70 19.4	Near Saco Harbour	4b	62	13	1858

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
GOAT ISLAND One fixed bright light	43 20. 70 28.2	N. side; Mouth of Cape Por- poise Harbour	5a	38	11	1833 1857
BOON ISLAND One fixed bright light	43 7.3 70 28.7	W. part; off York Harbour....	2a	133	17	1842 1854

NEW HAMPSHIRE.

WHALE'S BACK One fixed and flash lt.	43 3.5 70 42.1	N.E. side of Portsmouth Har- bour. Flash every $1\frac{1}{2}$ min. ..	4d	58	12	1829 1855
PORTSMOUTH One fixed bright light	43 4.2 70 42.8	S.W. side of Inner entrance of Harbour	4a	70	14	1804 1854
WHITE ISLAND One rev. br. lt., $\frac{1}{2}$ min.	42 58. 70 38.2	S.W. Id. of Isle of Shoals.....	2b	87	15	1821 1858

MASSACHUSETTS.

NEWBURY PORT Two fixed bright lts.	42 48.4 70 49.3	S. side of entrance to Port, Mer- rimack River, 167 yds. apart	5a	54 20	13 5	1809 1857
IPSWICH HARBOUR One fixed & flash lt., & One fixed bright light	42 41.1 70 46.2	Flash every $1\frac{1}{2}$ min. Lts. E. $\frac{1}{2}$ S., and W. $\frac{1}{2}$ N., 173 yds. apart	5d 6a	40 20	12	1837 1856
Wigwam Point One fixed bright light	42 39.7 70 41.2	E. of entrance to Annisquam Harbour	5a	50	12	1801 1857
Straitsmouth Harbour One fixed bright light	42 39.7 70 35.5	On Island, N. of Cape Ann	6a	33	11	1850 1857
CAPE ANN Two fixed bright lights	42 38.3 70 34.6	On Thatcher's Id., N. by E. $\frac{3}{4}$ E., & S. by W. $\frac{3}{4}$ W., 298 yds. apart		98 98	16 16	1841 1849
GLOUCESTER HARBOUR One fixed bright light	42 34.6 70 40.1	On the Point, E. side. Fog bell	4a	60	13	1837 1857
TEN POUND ISLAND One fixed bright light	42 36.1 70 40.2	Gloucester, or Cape Ann Har- bour	6a	49	12	1831 1856
BAKER'S ISLAND Two fixed bright lights	42 32.2 70 47.5	S. side of N.E. entrance to Salem Harb. 13 yds. apart. Fog bell	4a	87 64	15 13	1797 1857
MARBLEHEAD HARBOUR One fixed bright light	42 30.3 70 51.1	S. side of entrance	6a	43	12	1835 1856
Egg Rock One fixed red light	42 26. 70 54.1	Off Nahant	5a	87	8	1856
BOSTON BAY OUTER MINOTS LEDGE One fixed br. lt.	42 16.1 70 45.8	Grey granite tower, on Cohasset Rocks	2a	84	14	1860
BREWSTER ID. One flash. br. lt., $\frac{1}{2}$ m.	42 19.6 70 53.7	N. entrance of Harbour	2c	90	15	1784 1859
W. end of Spit		One fixed red light	6a	35	7	1856
LONG ISLAND HD. One fixed bright light	42 19.8 70 57.7	N.E. end of Island	4a	80	15	1819 1855

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
SCITUATE One fixed bright light	42 12.2 70 43.2	On Cedar Point, N. of entrance	4a	49	12	1812 1855
CAPE COD BAY						
PLYMOUTH Two fixed bright lts.	42 0.2 70 36.3	Gurnet Point, N. side of Harb. N.W. and S.E., 10 yds. apart	6a	93	15	1769 1856
RACE POINT One fixed & flash. lt.	42 3.7 70 14.8	N.W. Point of Cape Cod. Flash every 1½ min. Fog bell	4d	35	11	1816 1855
LONG POINT One fixed bright lt.	42 1.9 70 10.3	On Shoal, S.W. entrance to Provincetown Harbour	5a	28	11	1826 1856
Mayo's Beach One fixed bright lt.	41 55.8 70 2.2	Head of Wellfleet Bay	6a	26	6	1838 1856
BILLINGS GATE ISLAND One fixed bright lt.	41 51.6 70 4.9	N. side of entrance to Well- fleet	4a	40	12	1822 1858
SANDY NECK One fixed bright lt.	41 43.3 70 17.1	W. side of entrance to Barn- stable	4a	33	11	1836 1857
CAPE COD HIGH- LANDS One fixed bright light	42 2.3 70 3.9	Cape Truro	1a	195	20	1797 1857
NAUSET BEACH Three fixed bright lts.	41 51.6 69 57.3	At Eastham, E. of Cape Cod; N. and S., 50 yds. apart	6a	93	10	1837 1856
CHATHAM HARB. Two fixed bright lights	41 40.3 69 57.2	W. Side; N. and S., 23 yards apart	4a	70	14	1808 1857
MONOMOY POINT One fixed bright light	41 33.6 69 59.8	Cape Malabar, S. end of Cape Cod	4a	33	11	1823 1857
POLLOCK RIP LT. VESS.		One fixed br. lt., off Chatham ..	●	45	12	1849
SHOVELFUL LIGHT VESS. One fixed bright light	41 34. 69 57.6	2½ miles S.S.W. ¾ W., from Monomoy Point	●	40	11	1852
HANDKERCHIEF LT. VESS. One fixed bright light		In 5½ fms., 1½ min. from S. part of Shoal	●	40	10	1855
Bass River One fixed bright light	41 39.1 70 8.3	N. of Vineyard Sound	5a	40	8	1854
BISHOP AND CLERKS SHOAL One rev. br. lt., ½ m.	41 34.3 70 15.9	N. part. Fog bell	4b	59	14	1858
SUCCONNESSET SHOAL LT. VESSEL One fixed bright lt.		In 6 fms. Between Succonnesset and Eldridge Shoals. Fog bell and horn	●	40	10	1854
NANTUCKET One fixed bright light	41 23.4 70 3.	White tower, on N.E. Point of Island	3a	70	14	1769 1857
SANKATY HEAD One fixed and flash. light	41 17. 69 58.2	Tower, wh., red, wh., on E. part of Nantucket Island. Flash of 10 secs. every min.	2d	150	20	1849
SOUTH SHOAL LT. VESSEL Two fixed bright lts.	40 56.5 69 52.5	In 14 fms. 2 miles S. of Shoal. Fog bell, horn, and gun	●	44	12	1856

Name and Character of Light.	Lat. N. Long. W. o	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
VINEYARD SOUND						
GAYHEAD One flash. br. light.	41 20.9 70 50.4	W. Point, Martha's Vineyard Sound. Flash every 10 secs.	1c	170	20	1856
Hyannis Harbour One fixed bright lt.	41 38. 70 18.6	Inside the Harbour	6a	36	8	1856
Tuckanuck Shoal Lt. Vessel One fixed bright lt.	41 20.7 70 17.1	In 8 fms. On Cross Rip, N.W. of Nantucket. Fog bell, and horn	●	39	7	1828 1856
Nantucket Cliff Two fixed bright lts.		On the Beach, N.W. of Harb., N.W. and S.E., 100 yds. apart	..	8 10	4	1838 1856
BRANT One fixed bright lt.	41 17.4 70 5.8	Red tower, on the Point	4a	46	11	1794 1856
Nantucket Harbour One fixed bright lt.	41 16.4 70 5.	From a window, on S.E. side ..	..	24	5	1820 1856
CAPE POGE One fixed bright lt.	41 25.2 70 27.3	N.E. Point of Martha's Vine- yard Sound	4a	55	13	1801 1857
EDGARTOWN One fixed bright lt.	41 23.4 70 30.4	W. side of entrance to Har- bour	4a	37	12	1828 1856
HOLMES HOLE One fixed bright lt.	41 28.9 70 36.4	W. Chop of Harbour	4a	60	13	1817 1857
NOBSCUE POINT One fixed br. light	41 30.9 70 40.5	E.S.E. of entrance to Wood's Hole Harbour	5a	80	13	1828 1856
TARPAULIN COVE One fixed br. light	41 28.1 70 45.7	W. side.....	5a	80	13	1817 1856
VINEYARD SOUND LT. VESSEL Two fixed br. lts.	41 22. 70 57.6	In 13½ fathoms, near Sow and Pigs Rocks	●	34 23	9	1847 1855
BUZZARD'S BAY						
CUTTYHUNK One fixed bright lt.	41 24.8 70 57.3	S.W. Point of Island	5a	42	12	1823 1857
DUMPLING ROCK One fixed bright lt.	41 32.3 70 55.5	Off Round Hill	5a	42	12	1828 1857
CLARK'S POINT One fixed bright lt.	41 35.5 70 54.3	W. side of entrance to New Bed- ford Harbour	5a	57	12	1800 1856
Palmer's Island One fixed bright lt.	41 37.6 70 54.8	N.E. end, in New Bedford	5a	32	9	1849 1856
NED'S POINT One fixed br. light	41 39. 70 48.	N. side of Mattapoisett Har- bour	6a	43	11	1849 1856
BIRD ISLAND One rev. br. lt., 1½ m.	41 40.1 70 43.3	E. side of entrance to Sippican Harbour	5b	35	10	1819 1857
WING'S NECK One fixed bright lt.		Head of Buzzard's Bay, in Sand- wich	5a	44	10	1849 1856
Point of Rocks		Building (1861) on W. side of entrance to Westport Harb...	..	..	..	

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
RHODE ISLAND.						
BRENTON'S REEF LIGHT VESSEL Two fixed bright lts.		In 13 fms., E. side of entrance to Newport	●	50 40	12	1853
BEAVER TAIL One fixed bright light	41 26.9 71 24.3	S. Pt. of Connecticut Id., en- trance to Newport Harbour ..	3a	96	15	1793 1856
LIME ROCK One fixed bright light		S. side of Newport Harbour....	6a	30	11	1854
NARRAGANSETT BAY						
GOAT ISLAND One fixed bright lt.	41 29.6 71 19.9	On Breakwater, Newport Har- bour	4a	33	11	1823 1857
DUTCH ISLAND One fixed bright lt.	41 29.8 71 24.5	S. end	4a	56	14	1826 1857
POPLAR POINT One fixed bright lt.	41 34.2 71 26.5	Near Wickford	5a	51	12	1831 1855
PRUDENCE ISLAND One fixed bright lt.	41 36.4 71 18.3	East side, on Sandy Point.....	5a	30	10	1852
Bristol Ferry One fixed bright lt.	41 38.7 71 15.	N. side of entrance to Mount Hope Bay	6a	35	10	1855
WARWICK One fixed bright lt.	41 40. 71 22.9	S. end of Neck	4a	54	14	1826 1856
NAYAT POINT One fixed bright lt.	41 43.5 71 20.5	Entrance to Providence River ..	4a	31	12	1828 1856
POINT JUDITH One rev. lt., 15 secs.	41 21.5 71 29.2	S. extremity of Narragansett Shore	4a	67	14	1810 1857
BLOCK ISLAND One fixed bright light	41 13.4 71 34.8	N. Point of entrance to Long Island Sound	4a	65	14	1829 1857
WATCH HILL One fixed bright light	41 18.2 71 51.8	3 miles S.E. of Stonington	4a	62	14	1808 1857
CONNECTICUT.						
LONG ISLAND SOUND						
STONINGTON One fixed bright lt.	41 19.6 71 54.6	E. side of entrance	6a	50	12	1823 1855
EEL GRASS LT. VESSEL One fixed bright lt.	41 18.4 71 57.3	On the Shoal	●	32	10	1835 1857
MORGAN POINT One fixed bright lt.	41 18.9 71 59.7	N. side of Fisher's Island Sound	6a	44	11	1831 1855
N. DUMPLING ISLAND One fixed red light	41 16. 72 3.6	Fisher's Island Sound. Fog bell	6a	70	12	1868 1855
NEW LONDON One fixed bright lt.	41 19. 72 5.7	W. side of entrance to River Thames. Fog whistle	4a	86	14	1800 1857
BARTLET'S REEF LT. Vs. Two fixed bright lts.	41 16. 72 11.6	On Reef, off New London.....	●	28 35	10	1846 1857

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
LONG ISLAND SOUND						
LITTLE GULL ID. One fixed bright lt.	41 12.3 72 6.7	S. side of Long Island Sound. Fog bell	3a	74	13	1806 1857
Gardiner's Island		Fixed bright light, on N. Point	6a	29	6	1855
PLUM ISLAND One rev. br. lt., $\frac{1}{2}$ m.	41 10.4 72 13.6	W. end; N.E. extremity of Long Island	4a	63	12	1827 1856
Cedar Island One fixed bright lt.	41 2.4 72 15.9	Sag Harbour, Long Island	6a	34	10	1839 1855
SAYBROOK POINT One fixed bright lt.	41 16.3 72 21.5	W. side of Mouth of Connecticut River	4a	80	13	1803 1857
Calves' Island One fixed bright lt.		2 miles below Essex Town, E. side	6a	..	3	1856
Brockways Reach		Fixed br. lt., 2m. above Essex Tn.	6a	..	3	1856
Devil's Wharf		Fixed br. lt., 4m. above Essex Tn.	6a	..	3	1856
CORNFIELD PT. LT. VES. One fixed bright lt.	41 13.5 72 23.4	In $7\frac{1}{2}$ fms., on middle of S. side of Long Sand Shoal	●	40	10	1856
HORTON'S POINT One fixed bright lt.	41 5. 72 27.3	On the Point	3a	110	18	1857
FAULKNER ID. One fixed & flash. lt.	41 12.7 72 39.5	Off Guilford Harbour. Flash every $1\frac{1}{2}$ min.	4d	98	15	1801 1856
NEW HAVEN HAR. One fixed bright lt.	41 15.9 72 54.5	On Five Mile Point, E. side of entrance	4a	93	15	1805 1855
STRATFORD POINT One rev. br. lt., $\frac{1}{2}$ m.	41 9.1 73 6.5	W. entrance to River.....	4b	53	12	1821 1857
STRATFORD PT. LT. VES. Two fixed bright lts.	41 4. 73 4.6	In 11 fms., on Middle Ground ..	●	32 40	10	1837 1855
Bridgeport One fixed red light	41 10.5 73 11.7	2 miles S.W. by W. of town....	6a	23	6	1851 1854
OLD FIELD POINT One fixed bright lt.	40 58.6 73 7.4	S. side of Long Island Sound ..	4a	67	13	1823 1855
BLACK ROCK HARB. One fixed bright lt.	41 8.5 73 13.2	On Fairweather Island	5a	52	12	1808 1854
EATON'S NECK One fixed bright lt.	40 57.2 73 24.3	E. side of entrance to Huntington Bay	3a	138	17	1798 1857
LLOYD'S HARBOUR One fixed bright lt.	40 54.8 73 26.2	N. side	5a	48	10	1857
NORWALK ISLAND One rev. red and br. lt., $1\frac{1}{2}$ min.	41 2.9 73 25.4	W. end; at W. entrance of Nor- walk River	4b	40	11	1826 1857
GREAT CAPTAIN ID. One fixed bright lt.	40 58.9 73 37.7	Near Greenwich Point	4a	62	12	1829 1858
EXECUTION ROCKS One fixed bright lt.	40 52. 73 44.5	Off Sands Point. Fog bell	4a	54	12	1848 1856

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H.W.	Visible in Miles.	Year established.
LONG ISLAND SOUND						
SANDS POINT One rev. br. lt., $\frac{1}{2}$ m.	40 51.9 73 44.1	E. entrance to Cow Bay	4b	53	15	1809 1856
THROG'S NECK One fixed bright lt.	40 48.3 73 47.6	S.E. Point; at N.W. of entrance to East River	6a	66	10	1826 1855
NEW YORK AND NEW JERSEY						
MONTAUK POINT One fixed and flash. lt.	41 4.2 71 51.7	E. end of Long Island. Flash every 2 min.	1d	160	20	1795 1860
GREAT WEST, or SHINNECOCK, BAY One fixed bright lt.	40 51. 72 30.	N. side; tower, 150 ft. high, on Pondquogue Point	1a	160	20	1857
FIRE ISLAND One rev. br. lt., 1 min.	40 37.9 73 13.3	S. side of Long Island. Yellow tower, 150 feet high	1b	166	22	1826 1858
NEW YORK BAY						
SANDY HOOK Lt. V. Two fixed bright lts.	40 28. 73 52.	6 miles from Sandy Hook and Navesink lights	●	45	10	1823 1854
HIGHLANDS OF NAVESINK One fixed br. lt., and One rev. br. lt., $\frac{1}{2}$ m.	40 23.7 73 59.4	S. of Sandy Hook, 100 yards apart	1 2b	248	21	1828 1840
SANDY HOOK Three fixed br. lts.	40 27.6 74 0.4	S. entrance to New York Harb. E. lt. is N. by W. $\frac{1}{4}$ mile, and W. lt. N.W. $\frac{1}{4}$ m., from main lt.	3a 5a 6a	90 35 35	15 10 10	1762 1857
MAIN CHANNEL Two fixed bright lts.	40 25.2 74 4.	One near the Beach, the other on Chapel Hill, half mile apart ..	2a 3a	60 224	12	1856
GEDNEY'S CHANNEL Two fixed bright lts.	40 27. 74 8.2	Near Point Comfort	2a 3a	40 76	12 14	1856
SWASH CHANNEL Two fixed bright lts.	40 33.7 74 6.6	On Staten Id.; near Elm Tree Station, and New Dorp	2a 3a	59 189	14	1856
PRINCES BAY One fixed & flash lt.	40 30.4 74 13.	S.E. end of Staten Id. Flash every 2 min.	3d	106	16	1828 1857
FORT TOMPKINS One fixed bright lt.	40 35.9 74 4.4	On Staten Island, W. side of Narrows	4a	89	15	1839 1855
ROBBINS REEF One fixed bright lt.	40 39.4 74 4.2	N.W. part of New York Har- bour. Fog bell	4a	66	13	1839 1855
NEWARK BAY						
BERGEN POINT One fixed bright lt.		On a Reef, at entrance to Newark Bay. Fog bell	6a	40	10	1849 1853
Corner Stake		Fixed br. lt., opposite Eliz. Port	6a	..	..	1857
Passaic River		Fixed br. lt., at Mouth of River	6a	40	10	1849
Elbow		Fixed br. lt., $\frac{1}{2}$ m. N. of Passaic Lt.	6a	..	..	1854

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year re-established.
NEW JERSEY.						
BARNEGAT SHOALS One rev. br. lt., 10 secs.	39 45.8 74 6.7	Red and white tower, 159 feet high; S. side of Inlet.....	1b	165	22	1831 1858
ABSECOM One fixed bright light	39 22. 74 25.6	Tower, 150 feet high, on S. side of Inlet.....	1a	167	22	1856
CAPE MAY LT. VES. Two fixed bright lts.	38 53.5 74 39.5	In 12 fathoms, on Five-Fathom Bank, 16 miles from C. May..	●	45 40	10	1839 1855
CAPE MAY One fixed and flash. br. light, 1½ min.	38 55.8 74 57.8	N. side Delaware Bay. (A tower, 150 ft. high, with 1a rev. br. lt. 1 m., is to replace the present)	1d	84	14	1823 1858
CAPE HENLOPEN Two fixed bright lights	38 46.6 75 5.4	S. side Delaware Bay. Lower lt. ½ mile N.W. of Higher	1a 4a	180 33	20 10	1792 1855
DELAWARE BAY AND RIVER						
BREAKWATER One fixed & flash. lt.	38 47.9 75 6.1	Flash every 45 secs. Fog bell	4d	47	10	1849 1855
BRANDYWINE SHOAL One fixed bright lt.	38 59. 75 7.3	Iron screw pile tower. Fog bell	3a	46	13	1850 1857
Maurice River		Fixed br. lt., S.W. of Haystack Id.	6a	45	10	1849
EGG ISLAND One fixed bright lt.	39 10.5 75 8.6	N. side of Bay.....	5a	45	11	1837 1856
UPPER MIDDLE SHOAL, or CROSS LEDGE, LT. VESSEL		One fixed br. lt., W. side of main Ship Channel. Fog bell and horn	●	39	9	1845 1854
MAHON RIVER One fixed bright lt.	39 10.3 75 23.7	S. side of Bay	5a	30	9	1831 1855
COHANZEY One fixed bright lt.	39 20.3 75 21.7	W. side of Creek, N. side of Bay	5a	46	11	1838 1855
BOMBAY HOOK One fixed bright lt.	39 21.8 75 30.9	N.W. end	4a	46	11	1831 1855
REEDY ISLAND One fixed bright lt.	39 80. 75 34.4	S. Point. Fog bell	4a	55	12	1839 1855
CHRISTIANA RIVER One fixed bright lt.	39 43.3 75 31.4	At Wilmington, N. side.....	4a	48	11	1835 1855
Fort Mifflin		Fixed br. lt., on Pier. Fog bell	6a	28	7	1849
VIRGINIA.						
FENWICK ISLAND One fixed and flash. lt.	38 27. 75 4.1	White brick tower, fixed lt., with flash every 2 min. \.....	3d	86	15	1868
ASSATEAGUE ID. One fixed bright light	37 54.6 75 21.7	Between Chesapeake and Delaware Bays, 2 m. from S.W. Pt.	3a	80	14	1833 1856
HOG ISLAND One fixed bright light	37 23.3 75 42.2	W. Point	4a	60	13	1852 1855

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
CHESAPEAKE BAY						
CAPE CHARLES One rev. br. lt., 1 m.	37 7.8 75 52.8	N.E. of Smith Id., N. entrance. (A new tower, 150 ft. high, building.)	1b	69	14	1827 1858
CAPE HENRY One fixed br. light	56 55.5 76 0.8	S. side of entrance	2a	129	17	1791 1857
HAMPTON ROADS WILLOUGHBY SPIT LT. VESSEL Two fixed br. lts.		S. of entrance to Hampton Roads	●	48 35	11	1847 1857
OLD PT. COMFORT Two fixed br. lts.	37 0. 76 18.7	One on N. side of entrance to James' River; the other on S.W. Point	4a 6a	48 21	11 5	1802 1855
CRANEY ISLAND SHOAL One fixed bright lt.		W. side of entrance to Elizabeth River, near Norfolk. Fog bell and horn	5a	52	12	1820 1859
Naval Hospital		Fixed bright light, on the Wharf	6a	..	6	1857
JAMES RIVER						
White Shoal		Fixed br. lt., below Sandy Point	6a	27	9	1854
Point of Shoals		Fixed bright light, on the Shoal	6a	27	9	1854
Deep Water Shoals		Fixed bright light, on the Shoal	6a	27	9	1854
Jordan's Point		Fixed bright light	6a	35	10	1854
CHERRYSTONE INLET One fixed bright lt.	37 15.5 76 3.	W. side of entrance	4a	36	10	1859
BACK RIVER One rev. br. lt., $\frac{1}{2}$ m.	37 5. 76 21.	S. side of entrance	4b	35	10	1829 1854
York Spit Lt. Vessel		Fixed br. lt., in 4 fms., off Spit	●	40	9	1855
NEW POINT COMFORT One fixed bright lt.	37 18. 76 17.1	N. side of Mobjack Bay	4a	60	13	1804 1855
WOLFTRAP SHOALS LT. VESSEL Two fixed br. lts.		E. side of Shoal, between York and Rappahannock Rivers	●	30 38	10	1821 1854
Stingray Point One fixed bright lt.	37 33.6 76 14.7	S. side of Rappahannock River	6a	36	7	1859
WINDMILL PT. LT. VES. One fixed bright lt.		S.E. part of Shoal, N. side of Rappahannock River	●	34	10	1834 1854
WATTS ISLAND One fixed & flash lt.	37 46.9 75 53.8	S. end; E. entrance to Tangier Sound	5d	46	12	1833 1857

MARYLAND.

JANE ISLAND LT. VES. One fixed bright lt.		Off end of Bar, Tangier Sound	●	30	10	1853
---	-------	-------------------------------	---	----	----	------

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
CHESAPEAKE BAY AND RIVERS						
SMITH PT. LIGHT VES. Two fixed bright lts.		S.E. entrance of Potomac River	●	35 39	10	1821 1857
FOG POINT One fixed bright lt.	38 2.7 75 2.8	Smith Island, entrance of Po- tomac River	5a	30	10	1827 1855
CLAY ISLAND One fixed bright lt.	38 13.9 75 58.1	Entrance of Nanticoke River ..	6a	36	10	1832 1855
LOOKOUT POINT One fixed bright lt.	38 2.3 76 19.6	N. side of entrance to Potomac River	4a	37	10	1831 1857
HOOPER'S STRAITS LT. VESSEL One fixed br. lt.		S. of Hooper's Island	●	34	10	1827 1856
COVE POINT One fixed & flash. lt.	38 23.1 76 23.2	4 miles N. of Patuxent River. Flash every 1½ min.	4d	46	11	1828 1857
SHARP ISLAND One fixed bright lt.	38 37.7 76 22.5	N. Point; entrance of Choptank River	5a	41	10	1838 1855
THOMAS POINT One fixed bright lt.	38 54.4 76 27.6	4 miles S. of entrance to Anna- polis	4a	63	12	1825 1857
GREENBURY POINT One fixed bright lt.	38 58.5 76 26.9	N. side of Annapolis Harbour ..	6a	50	11	1848 1855
SANDY POINT One fixed & flash. lt.		Flash every 1½ min. Appears as fixed lt. only within 10 miles	5d	50	12	1858
PATAPSCO RIVER						
SEVEN FOOT KNOLL One fixed br. light	39 9.3 76 23.9	Entrance to Patapsco River	4a	43	11	1855
NORTH POINT Two fixed br. lts.	39 11.6 76 26.2	N. side of entrance	6a	33 42	10 11	1824 1856
FORT CARROLL One fixed br. light	39 11.8 76 26.6	On the Fort. Fog bell	3a	37	10	1854
LAZARETTO POINT One fixed br. light	39 15.6 76 34.6	N. side of Baltimore Harbour ..	4a	35	10	1831 1855
POOLE ISLAND One fixed br. light	39 17.4 76 15.7	Off Gunpowder River. Fog bell	4a	35	10	1825 1855
SUSQUEHANNA R.						
TURKEY POINT One fixed br. light	39 26.9 76 0.2	N. side of entrance to Elk and Susquehanna Rivers	4a	65	12	1833 1855
FISHING BATTERY One fixed br. light	39 29.6 76 4.6	On the Battery	6a	36	10	1853
HAVRE DE GRACE One fixed br. light	39 32.4 76 4.8	Concord Point, entrance of Sus- quehanna River	6a	40	10	1825 1857
POTOMAC RIVER						
PINEY POINT One fixed br. light	38 7.6 76 32.5	E. side, about 14 miles N.W. of Mouth	5a	35	10	1836 1856

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Vessel in Miles.	Year established.
POTOMAC RIVER						
BLAKISTONE ISLAND One fixed br. light	38 11.3 76 43.	Entrance of Clement Bay	4a	46	11	1851 1856
Lower Cedar Pt. Lt. Vessel One fixed br. lt.		Between Cedar and Yates Points	●	22	8	1825
Upper Cedar Pt. Lt. Vessel One fixed br. lt.		Off the Point, opposite Tobacco River	●	28	10	1851 1856
Fort Washington		Fixed bright light, on the Wharf	6a	..	6	1857
JONES POINT One fixed br. light	38 47.5 77 3.2	Near Alexandria.....	5a	35	10	1855
Bowler Rock Lt. Vessel		Fixed bright light	●	..	5	1835
NORTH CAROLINA.						
BODY'S ISLAND One rev. br. lt., 1½ min.	35 47.3 75 31.3	1½ mile S. of new Inlet	3b	90	15	1857
CAPE HATTERAS One flash. br. lt., 15 s., and one fixed br. lt.	35 15.2 75 30.5	Flash. light, 2 miles N. of high water; fixed light, 500 yards from Point	1c 6a	150 25	20 6	1798 1857
PAMLICO SOUND						
OCRACOCKE ID. One fixed bright lt.	35 6.5 75 58.5	W. end.....	4a	75	15	1823 1854
ROYAL SHOAL LT. VES.		One fixed br. lt., on S.W. Point	●	43	11	1826
ROYAL SHOAL		Fixed and flash. lt., on N.W. Pt.	4d	33	11	1857
HARBOUR ID. LT. VES.		Br. lt. on Bar, between Pamlico and Core Sds.	●	34	10	1836
BRANT ID. SHOAL LT. V.		Br. light, S. part of Pamlico Sd.	●	45	11	1851
NEUSE R. LT. VESSEL		Bright light, off Marsh Point ..	●	38	11	1828
PAMLICO POINT One fixed bright lt.	35 19.4 76 31.3	S. side of Pamlico River	5a	37	11	1828 1856
LONG SHOAL LT. VES.		Fixed br. lt., on E. Point. Bell, &c.	●	46	11	1854
ROANOKE MARSHES One fixed bright lt.		Pile lighthouse, between Pamlico and Croatan Sounds. Fog horn	4a	33	11	1825 1857
ROANOKE ID. LT. VES. One fixed bright lt.		Between Pamlico and Albemarle Sounds. Fog bell and horn..	●	31	10	1835 1854
WADE POINT One fixed bright light		White Pile lighthouse, on end of Shoal, W. side of Pasquotank R., Albemarle Sound	5a	31	10	1855
ROANOKE RIVER LT. VES.		Fixed bright lt., near entrance..	●	41	11	1835
CAPE LOOKOUT One fixed bright light	34 37.3 76 30.7	Red tower, 96 feet high, near the end of Cape	1a	156	22	1812 1859

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
BOGUE BANKS Two fixed bright lts.	34 41.7 76 40.	Beaufort Harbour, near Fort Macon. In one, N.W. $\frac{1}{4}$ W., and S.E. $\frac{1}{4}$ E., $\frac{1}{2}$ mile apart ..	4a 6a	50 30	13 10	1855
FRYINGPAN SHOALS LT. V. Two fixed bright lights	33 35. 77 50.	In 10 fathoms, 1 mile from Outer Shoal	●	40	12	1854
CAPE FEAR One fixed bright light	33 52.3 77 59.8	White tower, 92 feet high, on Bald Head, E. side of Cape Fear River, 4 m. from Cape ..	3a	107	16	1818 1855
FEDERAL POINT One fixed bright light	33 58.1 77 54.9	N. side of Inlet, N. of entrance of Cape Fear River	4a	46	12	1816 1855
CAPE FEAR RIVER						
OAK ISLAND Two fixed bright lts.	33 53.3 78 1.6	3 m. below Wilmington, N. $\frac{1}{4}$ E., and S. $\frac{1}{4}$ W., 267 yards apart	5a	37 27	9	1849 1855
PRICE'S CREEK Two fixed bright lts.	33 56.1 77 59.2	Entrance of Creek, W. bank of River	6a	25 35	9	1850
HORSE-SHOE LT. V. One fixed bright lt.	33 56.3 77 55.4	Between New Inlet and Price's Creek	●	43	16	1851
Campbell's, or Big. Id. One fixed bright lt.	34 6.9 77 56.	On S.W. corner	6a	25	9	1849 1855
Orton's Point One fixed bright lt.	34 3.4 77 56.2	W. Bank of River	6a	25	9	1849 1855
Upper Jetty Range Two fixed bright lts.	34 12.8 77 56.3	E. side of River, 3 miles below Wilmington, 267 yards apart	6a	42 65	8	1855
•						
SOUTH CAROLINA.						
GEORGETOWN One fixed bright light	33 13.5 79 6.7	White tower, 82 ft. high, at E. entrance to Pedee River	4a	85	14	1801 1854
Fort Point		Fixed bright light	5a	34	9	1858
CAPE ROMAIN One rev. br. lt., 1 min.	33 1.1 79 17.1	Raccoon Key. Striped red and white tower, 150 feet high ..	1b	150	23	1827 1857
BULL'S BAY One fixed bright light	32 55.7 79 30.5	White brick house, N. end of Island	4a	35	11	1852
RATTLESNAKE SHOALS LT. VESSEL Two fixed bright lts.	32 44.1 79 43.6	In 6 fathoms. Opposite N. end of Sullivan Island. Fog horn and bell	●	44	12	1854
CHARLESTON Two fixed bright lights	32 41.9 79 52.5	One on Id., W. of Ship Channel; the other in front of main lt.	2a 4a	133 50	20 10	1830 1857
CHARLESTON HARB.						
MORRIS ISLAND		Two fixed br. lts., 300 yds. apart	4a	55 40	10	1837
SULLIVAN Two fixed br. lts.	32 46.9 79 51.3	E. end of Battery on Island....	4a	45 50	10	1818 1857
FORT SUMTER		One fixed bright light	5a	57	10	1855
Castle Pinckney		One fixed red light	5a	50	10	1855
Battery Beacon		Gas light on E. end of Battery	..	45	..	1857

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
HUNTING ISLAND On rev. br. lt. $\frac{1}{2}$ min., & One fixed bright light	32 24.5 80 24.5	On N. Point; and on W. side of entrance to St. Helena Island	2b 6a	108 39	17 ..	1859
Cambahee Bank Lt. Vess.		Intended, 1861	..	..	..	
CALIBOGUE LT. VESSEL		Fixed br. lt., in $4\frac{1}{2}$ fms., in Sound	●	30	10	1855

GEORGIA.

MARTIN'S INDUSTRY LT. VESSEL Two fixed bright lts.	32 5.5 80 35.2	15 miles E. of Tybee Light. Fog horn and bell	●	44	12	1839 1855
TYBEE ISLAND Two fixed bright lts.	32 1.3 80 50.5	N.E. end, S. side of entrance to Savannah River; beacon lt. on Pt. of Tybee Id., $\frac{3}{4}$ mile E. of main light	2a 4a	108 62	16 12	1793 1856
SAVANNAH RIVER						
TYBEE KNOLL LT. VES.		Fixed bright light, N. of Id. Bell and horn	●	40	10	1848 1857
Cockspur Island One fixed bright lt.	32 1. 80 52.8	On a Knoll, E. end	5a	25	9	1849 1856
Oyster Beds		Fixed red lt., opp. Cockspur Id.	6a	35	9	1849 1856
Fig Island One fixed bright lt.	32 5. 81 3.6	On E. end, in Savannah River. Fog bell	6a	26	9	1848 1856
The Bay		Gas light, in Savannah city	..	77	9	1858
SAPELO ISLAND One fixed and flash. lt., One fixed bright light	31 21.5 81 24.	Tower, striped red and wh.; flash every 40 secs. S. end of Id.; N. side of Doboy Sound. Fixed light in front of former	4d 5a	74 50	14 11	1820 1854 1858
WOLF ISLAND Two fixed bright lights	31 18.2 81 20.3	Near N. end	6a	25 15	9	1822 1856
ST. SIMON ISLAND One fixed bright light	31 3.8 81 32.5	S. end, on N. side of St. Simon's Sound	3a	80	14	1811 1856
LITTLE CUMBER- LAND ISLAND One fixed bright lt.	30 53.9 81 32.4	S. side of entrance to St. Andrew Sound, and Santilla River ..	3a	70	14	1838 1856

FLORIDA.

AMELIA ISLAND 1. On rev. br. lt., $1\frac{1}{2}$ m., and 1 fixed bright lt. 2. Two fixed bright lts.	30 39.4 81 30.9	1. Rev. lt., with fixed lt. in front of it, on N. end, and S. side of entrance to St. Mary's River. 2. Two fixed lts. on N. side of Id., leading into Fernandina Harbour	3b .. 6a	104 .. 60 35	17 6 12 9	1838 1856 1858
ST. JOHN'S RIVER One fixed bright light	30 21.7 81 27.5	S. side of entrance	3a	75	14	1829 1859
Dame's Point Lt. Vessel		Small lt. off Point, St. John's R.	a	..	5	1857

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
ST. AUGUSTINE One fixed and flash lt.	29 50.8 81 19.2	N. end of Anastasia Id., S. entrance to St. Augustine. Flash every 1½ min.	4d	68	14	1823 1854
CAPE CANAVERAL One rev. br. lt., 1 min.	28 27. 80 33.	White tower, 55 feet high, on N.E. part	..	65	14	1847
JUPITER INLET One fixed & flash. br. lt.	26 55.4 80 5.1	Tower, 10 feet high. Fixed lt., with flash every ¼ min.	1d	146	18	1860
CAPE FLORIDA One fixed bright light	25 41. 80 3.	White tower, 96 feet high, on S. Point of Key Biscayne	2a	100	18	1825 1856
CARYSFORT One rev. br. lt., ½ min.	25 13.3 80 6.2	Dark tower, 112 feet high, on the Reef	1b	106	18	1852 1857
DRY BANK One fixed bright light	24 37.6 81 6.7	Red pile lt. ho., 149 ft. high, near Coffin Patches and Sombrero Key	1a	144	18	1857
SAND KEY One fixed and flash. lt.	24 26.5 81 51.2	Flash every 2 min. Dark tower, 121 ft. high, 7¼ miles S.W. of Key West Lt.	1d	110	18	1826 1853
KEY WEST S. W. Point of Island One fixed bright lt.	24 33. 81 49.3	White tower, 50 feet high	3a	50	13	1825 1858
N. W. Passage One fixed bright lt.	24 37.1 81 55.2	On iron screw Piles, in 6 feet ..	4a	40	12	1838 1854
DRY TORTUGAS LOGGERHEAD KEY One fixed bright lt.	24 37.3 82 55.2	Round tower, 150 feet high, on centre of W. Key	1a	152	20	1858
GARDEN, or BUSH KEY One fixed bright lt.	27 37.3 82 53.7	On Jefferson Fort	4a	70	14	1825 1858
EGMONT One fixed bright lt.	27 36. 82 45.7	Entrance of Tampa Bay, on the Key	4a	45	12	1848 1857
CEDAR KEYS One fixed and flash. lt.	29 5.7 83 4.8	Flash every min. On E. Mound of Seahorse Key	4d	75	15	1854
St. MARK'S HARBOUR One fixed bright light	30 4.4 84 10.6	E. side of entrance	4a	73	14	1829 1856
DOG ISLAND One rev. br. lt., 1 min.	29 46. 84 34.7	White tower, 44 ft. high, on E. side of Middle entrance to St. George's Sound	4b	48	13	1838 1856
CAPE ST. GEORGE One fixed bright light	29 36.2 84 58.6	White tower, 70 feet high, on the Cape	3a	77	15	1847 1857
CAPE ST. BLAS One rev. br. lt., 1½ m.	29 41.7 85 24.6	White tower, 50 feet high, 2 miles from S. Point of Cape ..	3b	96	16	1847 1858
PENSACOLA One rev. br. lt., 1 min.	30 19. 87 17.4	White tower, 160 ft. high, on S. side of entrance to Bay, near Barancas	1b	210	21	1824 1858

Name and Character of Light.	Lat. N. Long. W. o ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
ALABAMA.						
SAND ISLAND	39 11.3	1. Brick tower, 150 ft. high, 3 m.	1a	152	19	1838
1. One fixed br. light	88 2.	S.S.W. of Mobile Pt. 2. Beacon	..	20	9	1858
2. One red and br. fixed light		Its.; red lt. on E. Point, br. lt. on S. Point of Sand Id. Light-house, with red vertical stripe				1854
MOBILE BAY						
MOBILE POINT	30 13.8	1. White tower, 53 feet high, on	4a	58	13	1821
1. One fixed br. lt.	88 0.5	E. side of entrance to Bay.	..	20	9	1858
2. One fixed & flash. red light, and 1 fixed br. light		2. Beacon lights				1854
CHOCTAW POINT	30 40.2	White tower, 43 feet high, a little	4a	45	11	1837
One fixed bright lt.	88 2.	S. of Mobile city				185
Choctaw Pass		Two small beacon lights	..	15	3	1855
MISSISSIPPI AND LOUISIANA.						
MISSISSIPPI SD.						
ROUND ISLAND	30 17.5	Off Pascagoula Bay	4a	51	12	1833
One fixed br. light	88 34.2					1856
E. PASCAGOULA R.	30 21.	At Pascagoula	5a	..	10	1854
One fixed br. light	88 33.1					
SHIP ISLAND	30 12.9	On W. end	4a	51	13	1853
One fixed br. light	88 57.					
BLOXI	30 23.7	W. entrance to Bay	4a	62	13	1848
One fixed br. light	88 53.2					1856
CAT ISLAND	30 13.9	W. Point	4a	39	12	1831
One fixed br. light	89 8.7					1857
PASS CHRISTIAN	30 18.9	6½ miles N.W. of Cat Island	4a	42	12	1831
One fixed br. light	89 14.	Light				1857
MERRILL SHELL BK.	30 14.3	A pile lighthouse, between Cat	4a	45	11	1860
One fixed br. light	89 13.9	Island and Grand Island				
St. Joseph's Island		Building, 1861	..	..	..	
PROCTORSVILLE	29 52.2	Lake Borgne	6a	39	10	1850
One fixed br. light	89 39.4					
LAKE PONTCHARTRAIN						
PLEASANTONS ISLAND		E. entrance of Lake, near Pearl	4a	60	13	1838
One fixed bright lt.		River				1857
RIGOLETS	30 9.4	E. entrance of Lake	5a	30	10	1855
One fixed bright lt.	89 38.1					
BON FOUCA	30 2.3	Near Mouth of Bay on Bon	5a	39	11	1843
One fixed bright lt.	90 2.8	Fouca				1857
PORT PONTCHARTRAIN		Near E. end of Railroad. Flash	5d	35	10	1838
One fixed & flash. lt.		every 1½ min.				1855

Name and Character of Light.	Lat. N. Long. W.	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
LAKE PONTCHARTRAIN						
BAYOU ST. JOHN One fixed bright lt.	30 2. 90 4.	5 miles N. of New Orleans	6a	39	10	1811 1855
New Canal		Fixed bright light, at entrance..	5a	33	10	1838
Tchefuncta River		Fixed br. lt., near Madisonville	5a	38	11	1837
PASS MANCHAC One fixed bright lt.	30 17.8 90 12.7	S. side, between Maurepas and Pontchartrain Lakes	4a	45	10	1838 1867
CHANDELEUR ID. One fixed bright light	30 3.4 88 51.8	White tower, 50 feet high, on N. end	4a	50	13	1848 1865

MOUTHS OF MISSISSIPPI

PASS À L'OUTRE One fixed bright lt.	29 8.6 89 1.5	Black tower, 69 ft. high, on Middle Ground Id., N. side of entrance	3a	77	15	1855 1858
GORDON ISLAND One rev. br. lt., 1½ m.	28 59.7 89 7.4	S. Point of Id. South Pass, S.W. side	3b	60	13	1831 1858
Deer Island One fixed bright lt.		At junction of S.W. and N.E. Passes	6a	..	5	1852
SOUTH WEST PASS One fixed bright lt.	28 58.5 89 21.	White tower, 68 ft. high, on W. side of entrance of River	3a	70	15	1831 1858
TIMBALLIER BAY One fixed bright light	29 4. 90 16.5	W. side, Grand Pass	4a	60	13	1852
SHIP ISLAND SHOAL One fixed and flash. lt.	28 55.1 90 55.9	Brown pile lighthouse. Fixed lt., with flash every ½ min.	2d	110	17	1867
S.W. REEF One fixed red light	29 25. 91 30.	On the Reef	4a	49	12	1851
SHELL KEYS One fixed bright light	29 20. 91 49.	Pile lighthouse, 81 feet high, on S. extremity	3a	71	13	1859
SABINE PASS One fixed and flash. lt.	29 43.9 93 50.3	White tower, 75 feet high, on Brant Point, E. side of River. Flash every 1½ min.	3d	85	16	1856

TEXAS.**GALVESTON BAY**

BOLIVAR POINT One fixed bright lt.	29 22.6 94 45.7	Red tower, 89 feet high, N. side of entrance to Galveston Harb.	3a	100	16	1852 1858
Galveston		2 fixed br. lts., in range of Chan.	6a	..	10	1860
Galveston Beacons		2 fixed bright lts., in the city ..	6a	44	..	1856
Half-moon Shoal One fixed bright lt.		Between Pelican Id. and Dollar Point. Fog bell	6a	35	10	1854
Red Fish Bar		Fixed bright light. Fog bell ..	6a	35	10	1854
Clopper's Bar		Fixed bright light. Fog bell ..	6a	35	10	1854

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
MATAGORDA BAY						
MATAGORDA ID.	28 21.	Tower, with bands, 79 feet high,	3b	96	16	1852
One rev. br. lt., $1\frac{1}{2}$ m.	96 23.9	on E. Point				1858
Siluria		Fixed bright light, on N. side ..	6a	33	6	1858
Half-moon Reef		Fixed br. lt., on E. end. Fog horn	6a	40	6	1858
Swash		Fixed br. lt., opp. Alligator Hd.	5a	38	6	1858
ARANSAS PASS						
One fixed bright light	27 53.4 96 56.5	Brown tower, 55 feet high, on Low Island, on N. side	4a	60	13	1855
BRAZOS SANTIAGO						
PADRE ISLAND	26 6.	S. Point, N. side of entrance ..	5a	35	10	1852
One fixed bright lt.	97 12.					
ISABEL POINT	26 4.9	Flash every min. White tower,	3d	82	16	1852
One fixed & flash. lt.	97 11.1	57 feet high, on the Point....				1857
Rio Grande		Building, 1861	..	..	..	

Name and Character of Light.	Lat. N. Long. W.	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
ABACO One rev. br. lt., 1 min.	25 51.5 77 10.7	(British). White and red tower, 85 feet high, on S.E. Point, or Hole in the Wall	..	160	16	1848
NASSAU HARBOUR One fixed bright light	25 5.6 77 22.	(British). Stone tower, 58 feet high, on W. Point of Hog Id.	..	68	10	1847
GREAT ISAAC One rev. br. lt., $\frac{1}{2}$ min.	26 2. 79 6.5	(British). Red and white tower, 145 feet high, on Island	●	158	16	1859
GUN KAY One rev. br. lt., $1\frac{1}{2}$ m.	25 34.6 79 18.8	(British). Tower, 70 feet high, near S. Point	..	80	12	1836
KAY SAL BANK One fixed bright light	23 56. 80 28.5	(British). White and red tower, 58 feet high, on N. Elbow Kay	..	96	14	1839
KAY LOBOS One fixed bright light	22 22.8 77 35.8	(British). Red and white iron tower, 150 feet high, on Kay	1a	146	16	1860
TURKS ISLAND One fixed and flash. lt.	21 31. 71 7.7	(British). White tower, 60 feet high, 400 yards from N. end. Flash every $\frac{1}{2}$ min.....	..	103	15	1852
CUBA (Spanish).						
ST. IAGO DE CUBA One rev. br. lt., 1 m.	19 57.5 75 58.8	E. side of Morro Castle	4b	223	20	1842
CRUZ CAPE One fixed bright lt.	19 50.2 77 45.3	Building, 1861	2a	106	16	
JAGUA, XAGUA, or Ci- ENFUEGOS HARR. One rev. br. light	22 1.2 80 40.3	Colorado Point, E. of entrance..	3b	81	14	1851
Batabano One fixed br. light	22 41.4 82 18.	Lantern, on a Mast.....	..	31	3	1847
ISLE OF PINES One rev. bright light	21 26. 83 6.	Proposed, 1861, on Cape Pepe ..	2b	111	16	
SAN ANTONIO One rev. br. lt., 1 m.	21 51.8 85 1.3	Roncali Tower, 117 feet high, on the Cape	2b	107	20	1850
JUSTIAS One fixed & flash. lt.	22 43.3 84 6.5	Proposed, 1861, on the Kay	2d	129	16	
GOBERNADORA One rev. bright light	23 0. 83 13.2	Proposed, 1861, on the Point ..	2b	111	15	
HAVANA One fixed & flash. lt.	23 9.3 82 22.1	On Morro Castle, E. entrance. Flash every $\frac{1}{2}$ min.	1d	144	21	1847
Port Santa Cruz		Fixed bright light	..	..	7	1858
GUANOS One rev. br. lt., 1 m.	23 9. 81 42.	Proposed, 1861, on the Point ..	3b	92	..	

Note.—The latitudes and longitudes on the Coast of Cuba are uncertain, probably to a considerable amount.

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H.W.	Visible in Miles.	Year established.
CARDENAS BAY One fixed & flash. lt. One fixed red & br. lt.	23 14.4 81 7.5	Flash. lt., red flash every $\frac{1}{2}$ min., on Piedras Kay. Fixed red and br. lt. on Anas Kay	4d	66 48	15 9	1857 1846
BAHIA DE CADIZ One rev. br. lt., 1 m.	23 13. 80 30.	Proposed, 1861, iron tower, 169 feet high, on the Kay	1b	175	20	
Anguila One fixed & flash. lt.	23 29. 79 32.	Proposed, 1861, on S.E. Kay ..	4d	..	8	
KAY PAREDONE GRANDE One fixed & flash. lt.	22 29.4 78 9.7	Iron tower, 128 feet high, on N. part. Flash every min.	1d	169	20	1859
NUEVITAS HARB. One rev. br. lt., 1 m.	21 39.6 77 10.9	Colon tower, 170 feet high, on Maternillos Point	1b	174	23	1849
LUCREZIA One rev. bright lt.	21 10. 75 38.	Building, 1861, on the Point ..	1b	112	15	
CAPE MAYSI One fixed bright lt.	20 16. 74 7.	Building, 1861. [There is a tem- porary lt. at 53 ft., vis. 10 m.]	2a	124	15	

JAMAICA (English).

MORANT POINT One rev. br. lt., 1 m.	17 56. 76 11.2	White tower, 96 feet high.....	..	115	15	1842
PLUM POINT One fixed red or br. lt.	17 55.7 76 47.	Red between W.N.W. $\frac{1}{2}$ N. & N. $\frac{1}{2}$ E. Br. from N. $\frac{1}{2}$ E. to S.E.	..	68	12	1864
Fort Augusta One fixed red or br. lt.	17 57. 76 53.	Red to E.; bright to S. & W. ..	..	40	..	
SANTO DOMINGO One fixed bright light	18 28.1 69 52.5	Tower, 100 feet high, on San Jose Fort	..	113	9	1853
PUERTO RICO One rev. br. lt., 2 min.	18 29. 66 7.1	Fort San Juan, on the Morro ..	2b	171	20	1846
SANTA CRUZ, or ST. CROIX ISLAND One fixed bright lt.	17 42.7 64 52.7	(Danish).	..	..	4	1857
ST. THOMAS One fixed bright light	18 19.4 64 55.1	(Danish). E. entrance, on Moh- lenfels Point	..	95	12	1844
SOMBRERO	18 35.8 63 27.7	(British). Proposed, 1861, on the Island	..	..	..	
St. CHRISTOPHER One fixed bright light	17 18. 62 42.5	(British). On the Beach, at Basse Terre	..	37	12	1846
Montserrat	16 43. 62 12.	(British). 2 fixed br. lights for Mail Steamers, on the Beach at Plymouth	..	..	..	
Antigua Two fixed br. lights, & One red light	17 0. 61 45.7	(British). Fixed triangularly, upper lt. red, for Mail Steamers	..	62	8	1843

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Viable in Miles.	Year established.
GUADALOUPE (French).						
Moule de Port One fixed bright lt.	16 23.7 61 21.	[Position uncertain].	..	..	7	1858
Pointe à Pitre		Lantern, S. of town	..	..	..	
Muron Islet		Lantern	..	..	..	
Grozier Islet	16 14.1 61 24.7	One fixed bright light	..	..	..	
PETITE TERRE One fixed br. light	16 10.5 61 4.9	Tower, 75 feet high	3a	108	15	
Dominica	15 18.2 61 25.	(British). Light on Fort Young flagstaff.	..	..	..	
MARTINIQUE One fixed red, & 1 br. lt.	14 36.1 61 4.6	(French). Red lt. on Pointe de Nègres, in Fort. Br. light in Fort Royal, S.W. part	..	62 131	11 6	1855
St. Lucia Three fixed bright lts.	14 0. 61 5.	(British). 2 lts. on Tapion Bat- tery, S. entr. of Castries Harb.; 1 light on Wharf. For Mail Steamers	..	80	3	1843 1850
St. Vincent One fixed bright light	13 13. 61 15.	(British). On Fort Charlotte, for Mail Steamers	..	640	6	1858
TRINIDAD One fixed bright light	10 38.7 61 31.9	(British). In Port Espana, on the Jetty	..	50	5	1841
TOBAGO One fixed bright light	11 10. 60 44.	(British). Scarborough, on Ba- colet, or Red Point.	..	128	12	1842
BARBADOS (British).						
Carlisle Bay One fixed br. or red lt.	13 4. 59 37.2	Bright to S. of E.; red to N. of E.	..	34	5	1855
S. POINT One rev. br. lt., 1 m.	13 2.7 59 33.5	Red and white striped tower, 90 feet high	..	145	18	1852
GUAYANA.						
Cayenne One fixed bright light	4 56.2 52 14.8	(French). On Infantry Bar- racks	..	69	8	1850
SURINAM LIGHT VESSEL One fixed bright light	6 4. 55 9.5	(Dutch). In 4 fathoms, off Bram Point.	..	30	7	1858
BERBICE HARBOUR LT. VESSEL One fixed bright light	6 19.3 57 22.5	(British). Near E. Point of en- trance	..	..	15	1850
DEMERARA (British).						
LIGHT VESSEL One fixed bright lt.	6 55.5 58 1.5	In 4 fms., 10 miles N.N.E. $\frac{1}{2}$ E. from River entrance	..	..	12	1844
E. SIDE One fixed bright lt.	6 49.3 58 11.5	Red and white tower, 100 ft. high, on E. side of River entrance.	..	103	14	1829

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
TIERRA FIRME Orinoco River Lt. Vessel	8 37. 60 42.	Sunk in 1859. Not likely to be replaced	..	..	..	
Puerto Cabello	10 29. 68 0.	(Venezuelan). Proposed, 1861	..	..	..	
Fucacas One fixed bright light	10 47. 68 24.	(Venezuelan). Brava Point	..	30	9	
BUEN AYRE One fixed bright light	12 2.5 68 42.5	(Dutch). Lacre Point, S. Point	●	85	12	
LITTLE CURAÇOA ISLAND One fixed bright light	11 58. 68 44.	(Dutch). On S. side.....	●	62	10	1850
Great Curacao Island One fixed bright light	12 6. 68 59.	(Dutch). St. Ann Harbour, on Rif Fort	..	..	..	1850
Rio de la Hacha One fixed bright light	11 33. 72 59.	(New Granada). On the Church	..	69	6	1857
LIMON, or NAVY BAY, One fixed bright light	9 23.8 79 53.	(New Granada). N.W. part of Manzanillo Island	..	60	10	1852
HALF-MOON KAY One fixed bright light	17 12.3 87 32.4	(British). On S.E. Point.....	..	88	18	1848
Belize Three fixed bright lts.	17 19.6 88 4.	(British). S. side, on English Kay	..	95 75	3	1846
TURNEFF KAYS Three fixed bright lts.	17 36. 87 46.	(British). Fixed triangularly, on Mauger Kay, N.W. Point....	..	95 75	13	1846
GULF OF MEXICO						
SISAL One fixed bright light	21 10. 90 3.	(Mexican). On the Castle	..	60	10	1852
Terminos de Laguna One fixed bright light	18 38.5 91 54.	(Mexican). In Indian village..	..	75	..	1856
Coatzacoalcos River One fixed bright light	18 12. 94 17.	(Mexican). [Temporary light is shown while lighthouse is building, 1861.]	..	..	..	
VERA CRUZ One rev. bright light	19 12.3 96 7.2	(Mexican). Fort San Juan de Ulloa	..	80	15	
Tampico	22 15. 97 46.	(Mexican). Small light on N. Point, for Mail Steamers	..	..	..	

Name and Character of Light.	Lat. S. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
BRAZIL.						
PARA One rev. bright light	0 34. 47 17.1	On Atalaia Point	..	..	17	1852
ITACOLOMI One rev. red & br. lt., 2 min.	2 10. 44 24.	Tower, 75 ft. high, on the Point. Red and bright alternately ..	..	147	15	
MARANHAM One fixed bright light	2 29.5 44 16.	San Luiz, on San Marcos Fort..	..	..	10	1829
SANT' ANNA One rev. br. lt., 40 secs.	2 19. 43 31.	E. part of Island (may be dis- continued)	..	..	..	
Ciara One fixed bright light	3 41. 38 29.	Macoripe Point	..	37	10	1847
RIO GRANDE DO NORTE One fixed bright light	5 45. 35 13.15	On Fortress, off Santos Reis Magos	..	43	12	1860
PERNAMBUCO One rev. br. & red lt., 1 min.	8 3.7 34 51.7	On the Reef, 50 yards from Pacao Fort. Twice bright, and once red	..	..	22	1824
MACEIO One fixed and flash. lt.	9 39.3 35 41.4	W. part of Mountain. Flash every 2 min.	..	208	22	1856
BAHIA, or SAN SAL- VADOR One rev. br. & red lt., 1½ min.	13 0.9 38 31.7	On Fort San Antonio. Twice bright, and once red	..	140	18	1823
MORRO DE S. PAULO One rev. br. lt., 1 min.	13 21.7 38 54.8	On the Morro	..	276	20	1854
CAPE FRIO One rev. br. lt., 2 min.	23 1.3 41 58.2	On the summit	...	1000-20	...	
RAZA One rev. br. & red lt., 2½ min.	23 5.7 43 8.3	Red tower, 50 feet high, on the Island	..	315	14	1828
RIO DE JANEIRO One fixed br., & 1 red light	22 56.6 43 7.3	Br. lt., on Fort Santa Cruz, E. entrance. Red lt. on Calha- bouco Point	..	..	6	1839 1856
SANTOS One fixed bright light	24 2. 46 3.	White tower, 40 feet high, on Moela Island	..	100	12	1831
RIO GRANDE One rev. br. lt., 2 min.	32 7.3 52 4.4	1 1-10 mile from N. Point of entrance	..	96	14	1851

BUENOS AYRES.**RIO DE PLATA**

MALDONADO BAY One fixed bright lt.	34 58. 54 56.	(Banda Oriental). Tower, 90 ft. high, on E. Point	a	152	10	1860
FLORES One rev. br. lt., 3 m.	34 57. 55 55.8	(Banda Oriental). White tower, 65 feet high, on Island (light not to be depended on)	..	104	12	1833

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
RIO DE PLATA						
ENGLISH BANK LT. V. One fixed bright lt.	35 6. 55 54.	(Banda Oriental). In 7 fms., on N. part	..	..	10	1857
MONTE VIDEO One fixed & flash. lt.	34 53.3 56 14.7	(Banda Oriental). On Mt., W. side of Harb., flash every 3 m.	..	486	25	1852
ORTIZ BANK LT. VESSEL One fixed bright lt.	35 11.5 57 1.3	(Buenos Ayrean). In 3½ fms., 8 m. N.E. ¼ N. from Indio Pt.	●	30	10	1857
CHICO BANK LT. VES. One fixed bright lt.	34 47. 57 29.2	(Banda Oriental). In 5 fms., 13 m. N.E. ¼ N. from Atalaia Pt.	..	20	9	1857
COLONIA One rev. br. lt., 3 m.	34 28.2 57 49.7	(Banda Oriental). On S.W. Angle of Plaza	..	110	10	1855
Buenos Ayres Gd. Ship One fixed bright lt.	34 34.5 58 16.	(Buenos Ayrean). In 2½ fms., in outer Roads	..	20	7	1857
PATAGONIA.						
FALKLAND ISLANDS One fixed bright light	51 40.7 57 41.8	(British). White and red striped tower, 60 ft. high, on C. Pem- broke	●	110	14	1855
CHILE.						
CHILOE ISLAND One fixed & flash. br. lt.	41 46.7 73 55.7	N. part, San Carlos de Ancud ..	4d	197	12	1859
Concepcion Bay	36 36. 73 6.	Proposed (1861) on Quiriquina Island	..	..	..	
VALPARAISO One fixed & flash. br. lt.	33 1.2 71 41.5	White tower, 61 feet high, on Angeles, or Playa Ancha Pt. Flash every min.	4d	197	20	1857
Huasca	28 28. 71 19.	Proposed (1861)	..	..	..	
Caldera	27 3. 70 56.	Proposed (1861)	..	..	..	
Peru.						
CALLAO One fixed bright light	12 4. 77 19.5	On N. Point of Lorenzo Id.	..	980	12	1857
Ecuador.						
GUAYAQUIL One fixed bright lt.	3 10. 80 26.	(Peruvian). Middle of Santa Clara Island	..	..	..	1847
Costa Rica.						
NICOYA GULF One fixed bright lt.	5 59.6 84 49.3	Punta Arenas	3a	65	10	1856
Mexico.						
Acapulco	16 50.3 99 52.	On Grifo Pt., for Mail Steamers	..	..	..	1858

Name and Character of Light.	Lat. N. Long. W. o ,	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.

CALIFORNIA.

UNITED STATES.

SAN DIEGO One fixed bright light	32 40.2 117 12.4	Near Point Loma, W. side of entrance	3a	457	25	1855
San Pedro	33 46. 118 18.	Building (1861) on Fermin Point	..	..	..	
Huenme		Building (1861) on the Point ..	..	..	..	
SANTA BARBARA One fixed bright light	34 23.6 119 42.1	On Bluff, 2 miles S.W. of land- ing-place	4a	180	12	1856
CONCEPTION One rev. br. lt., $\frac{1}{2}$ min.	34 26.8 120 25.5	On the Point. Fog bell	1b	250	23	1855
MONTEREY One fixed bright light	36 38. 121 55.	Grey tower, 35 feet high, on S. side of Point Pinos	3a	91	13	1854
Santa Cruz Harbour		Building (1861)	..	..	..	
FARALLON One rev. br. lt., 1 min.	37 41.9 122 59.1	On summit of S.E. Islet	1b	360	26	1855
SAN FRANCISCO						
BONITA One fixed bright lt.	37 49.2 122 30.8	On N. Point of entrance of Golden Gate. Fog bell	2a	306	24	1855
LOBOS POINT One fixed & flash. lt.		On S. Point of entrance	2d	..	..	1861
FORT, S. POINT One fixed bright lt.	37 48.4 122 27.6	White tower, 36 feet high. Fog bell and horn	5a	52	12	1855
ALCATRAZ ISLAND One fixed bright lt.	37 49.6 122 24.4	White tower, 36 feet high. Fog bell	3a	166	14	1854
REYES One fixed & flash. br. lt.	37 59.6 123 0.3	Building on the Point (1861). Flash every $\frac{1}{2}$ min.	..	..	..	
Cape Mendocino	40 29. 124 32.	Building (1861) on the Cape ..	..	..	..	
HUMBOLDT HARBOUR One fixed bright light	40 46.1 124 12.3	White tower, 45 feet high, on N. side of entrance	4a	53	12	1856
CRESCENT CITY One fixed & flash. br. lt.	41 44.6 124 11.4	On outer end of Island, which forms S. and W. sides of Harb. Flash every $\frac{1}{2}$ min.	4d	80	14	1856
UMPQUA RIVER One fixed bright light	43 40.3 124 11.1	White tower, 83 feet high, on the Sands	3a	100	16	1857
CAPE HANCOCK One fixed bright light	46 16.6 124 2.	On slope of Cape; Columbia River. Fog bell	1a	230	22	1856
CAPE FLATTERY One fixed bright light	48 23.3 124 43.8	Juan de Fuca Strait; on Tatoosh Id., $\frac{1}{2}$ mile N.W. of Cape ..	1a	162	20	1857
NEW DUNGENESS One fixed bright light	48 11.7 123 7.5	Juan de Fuca Strait; on N. end of Sand Spit. Fog bell & horn	3a	100	14	1857

Name and Character of Light.	Lat. N. Long. W. ° ' "	Description, &c.	Description of Apparatus	Height above H. W.	Visible in Miles.	Year established.
BLUNT, or SMITH ID. One rev. br. lt., $\frac{1}{4}$ min.	48 19.2 122 50.8	Juan de Fuca Strait; on highest part of Id.	4b	90	15	1858
Admiralty Head One fixed bright light	48 10. 123 20.	Whidbey Id., at entrance of Admiralty Inlet.....	..	119	17	1861

BRITISH COLUMBIA.**VANCOUVER ID.**

RACE ISLANDS | 48 17.5 | On the Rocks..... | 2c | .. | .. | 1861
One flash. br. lt., 10 s. | 123 32.2

ESQUIMALT | 48 25.6 | Fisgard Id., S. Point. *Red*, 140°; | 4a | 65 | .. | 1860
One fixed *red*, br., or | 123 27.2 | *green*, 20°.

SITKA | 57 2.9 | (Russian). New Archangel. | .. | .. | .. |
One fixed bright light | 135 17.3 | Lighted when a vessel at sea
fires a gun

PACIFIC OCEAN.**SOCIETY ISLANDS.**

Tahiti | 17 30. | On Point Venus | .. | .. | 6 | 1856
One fixed bright lt. | 149 29.

**HAWAII, or SAND-
WICH IDS.**

KARAKAKOA BAY | 19 28. | Building (1861) on the Point of | .. | .. | .. |
One fixed bright lt. | 155 55. | Hawaii (Owhyhee) Island, on
which Capt. Cook was killed

CAPE KAWAIHOA | 21 45. | Building (1861) on Oneheow Id. | .. | .. | .. |
160 12.

INDEX TO THE LIGHTHOUSES.

	Page.		Page.		Page.
Aalbek	59	Annapolis	115	Banff	45
Aarhus	60	Anstruther	44	Banks Strait	110
Aarö	61	Antibes	86	Bantry Bay	53
Abaco	135	Anticosti Island	112	Barbados	137
Aberdeen	45	Antigua	136	Barber's Point	96
Abervrach	75	Anzio, or Anzo	89	Barcelona	85
Aberystwith	38	Apenrade	61	Bardsey	38
Absecom	125	Apple River	115	Barfleur	73
Acapulco	140	Aden Lt. Ves.	102	Barges d'Olonne	78
Admiralty Head	142	Aransas Pass	134	Bari	92
Adour River	79	Aranmore Island	52	Barletta	92
Adra Point	83	Arbroath	45	Barra Head	47
Adriatic Sea	92	Arcachon Basin	79	Bartlett's Reef Lt. V.	122
Agde	85	Archipelago	94	Barnegat Shoals	125
Agdenäs	54	Ardglass	51	Basin of Mines	115
Agersö	60	Ardnamurchan	47	Bass Harb. Hd.	117
Agger Chan. Lt. Vessel	66	Ardrihaig	48	Bassania	93
Aguilas Port	83	Ardrossan	49	Bass Strait	108
Agulhas Cape	102	Arendal	56	Bass River	120
Aignes Motes	85	Arichat Harbour	114	Bastia	87
Aiguillon Point	78	Arklow Lt. Vess.	50	Bastö Island	57
Ailly Point	72	Arkona	65	Batabano	135
Air Point	38	Armegon Shoal	105	Batavia	106
Aitodor Cape	98	Arosa Island	81	Bathz	69
Ajaccio Gulf	87	Arracan, or Akyab, River	105	Bayou St. John	133
Akyab River	105	Arzew	99	Bayona, or Cies	81
Alabama	132	Arzina Island	87	Beachy Head	34
Alcatraz Island	141	Assateague Id.	125	Bea Island	47
Alexandria	99	Assens	60	Béarn, Cape	85
Alexandrette	99	Athens	94	Beaver Islands	114
Algeciras	82	Aucanada	84	Beaver Tail	122
Algeria	99	Audierne Port	76	Bec du Raz	76
Algier	100	Augusta	90	Bedeque Harb.	113
Algoa Bay	102	Authie R.	71	Beeves	53
Alguada Reef	105	Avatchka Gulf	107	Bel-Air	102
Alicante	83	Aviles	80	Belem	81
Alistro	87	Avon	37	Belfast Bay	51
Al Khelb	99	Ayr	49	Belize	138
Al-Khuzemas, or Alhucemas	100	Baagö Island	60	Belle Isle	111
Almeria Point	83	Baboushkin Pt.	10	Belle Ile	77
Alpreck Point	71	Bacalhao, or Baccalieu Id.	111	Bell Rock	44
Als	61	Back River	126	Bembridge Lt. V.	35
Amelia Island	130	Badino	89	Bender Erekli	98
Amherst Point	106	Bagno Port	89	Bengal, Bay of, ...	105
Amlwch P.	38	Bahama Bank Lt. Ves.	40	Berbice Harbour Lt. V.	137
Amour Point	111	Bahia de Cadiz	136	Berdiansk	98
Amrum Island	66	Bahia, or San Salvador	149	Berdoun Island	99
Anaga	101	Baia	89	Bergen	55
Anatolia	97	Bailey	51	Bergen Point	124
Ancona	92	Baker's Id.	117, 119	Berlingas	81
Andenæs	54	Balbriggan	51	Bermudas	101
Andros Island	95	Baleines	78	Berville	72
Anholt Lt. Ves.	58	Balearic Islands	84	Berwick-on-Tweed ..	43
Anholt Island	59	Ballycottin	50	Biana Point	93
Anjer	106			Biarritz	79
Annan River	49			Bicquette Island	112
				Bideford	37

	Page.		Page.		Page.
Bidston	39	Brenton's Reef Lt. Ves.	122	Camargue, or Faraman	85
Bielosarai	98	Bressay	46	Camarat Cape	86
Bilbao	80	Brest	76	Camaret Bay	76
Billingsgate Id.	120	Breton Island	113	Cambay Gulf	103
Biloxi	132	Breton Port	78	Cambahee Bank Lt. V.	138
Binic Port	75	Brewster Island	119	Campanella Pt.	90
Biörn Rock	62	Bridgeport	123	Campbellton	48
Biørnhabben R.	61	Bridgewater, C.	108	Campobello Id.	116
Bird Island	121	Bridgewater	37	Campbell's, or Big Id.	129
Bird Islands	102	Bridlington	42	Cannanore	104
Bishop Rock	36	Brielle	68	Canary Isles	101
Bishop & Clerks Shoal	120	Brighton	34	Canaveral Cape	131
Biurö	62	Brindisi	92	Canche River	71
Black Rock	52	Bristol Channel	37	Candia Island	45
Black R. Harbour	123	Bristol Ferry	122	Canea	95
Black R. Point	115	Brixham	35	Cannes	86
Black Rock	39	Broadhaven	56	Cannonier Point	102
Black Sea	97	Brockways Rh.	122	Canso Cape	114
Blackwater Bk. Lt. Ves.	50	Brouwers Havn	63	Canso Gut	113
Blakistone Id.	128	Brown's Head	118	Cantick	46
Blankenberg	70	Brüster Ort	68	Canton River	107
Blaye	79	Bryer Island	115	Cape Coast Castle	101
Bleigura Dandee	103	Buchanness	45	Caprera Island	89
Block Island	122	Buckhaven	44	Capri Island	90
Blunt, or Smith I.	142	Buddonness, or Tay ..	45	Capraia Island	88
Blyth	43	Buen Ayre	138	Carbon Cape	100
Body's Island	128	Buenos Ayres	139	Carbonara	87
Bogue Banks	129	Buffalo River	102	Cardenas Bay	136
Bolivar Point	133	Bugio	81	Cardigan Bay Lt. Ves.	38
Bombay	103	Bukke Sund	56	Cardiff	37
Bombay Hook	125	Bulk	61	Cardigan Bay	113
Bonah	99	Bull's Bay	129	Cardross	48
Bonan	62	Bull Sand Lt. V.	42	Carlisle Port	40
Bonanza	82	Burnham, or Bridge-		Carlisleford	51
Bonavista Cape	111	water	37	Carlisle Bay	137
Bon Fouca	132	Burnt Island	118	Cartagena	83
Bonifacio Port	87	Burntisland	44	Carthage Cape	99
Bonita	141	Bush Key	131	Cartaya	82
Boon Island	119	Busto Cape	80	Carteret Cape	74
Borda, or Flinders Cape	108	Buskir Islet	58	Caruso	89
Borkum Island	67	Butt of Lewis	47	Carvoeiro Cape	81
Bornholm	65	Buzzard's Bay	121	Carysfort	131
Borongo, W. Id.	105			Casco Bay	138
Borselen	69	Caballeria Cape	84	Cascumpeque	113
Bösch	66	Caballo Island	107	Caskets	74
Boston Bay	119	Cabo de Gata	83	Castellamare	90
Botafoch Island	84	Cabrera Islands	84	Cassis	86
Bottö	58	Caccia Cape	87	Castro Urdiales	80
Bonac Fort	100	Cadiz	82	Castle Pinckney	129
Bouc	86	Caernarvon	38	Castletown Harbour ..	40
Bougie	100	Cagliari Harb.	87	Catania	90
Boulogne	71	Cala Figuera	84	Catthero Gulf	93
Bourbon Id.	102	Calais	71	Cat Island	132
Bourzi Tower	95	Callao	140	Cayenne	137
Bovali Kalassi	96	Caldera	140	Cayeux	71
Bowler Rock Lt. Vessel	128	Caleta	85	Cé Cape	81
Brantö Island	62	Caldy Island	38	Cedar Island	123
Brandywine S.	125	Calf of Man	40	Cedar Keys	131
Brant	12	Calf Rock	53	Cellardyke	44
Brant Id. Shoal Lt. Ves.	125	Calibogue Lt. V.	130	Cephalonia Island	94
Brazil	139	Calicut	104	Cerigo Island	94
Brazos Santiago	134	California	141	Cervia	93
Breaksea Id.	107	Calshot Lt. Ves.	35	Cesenatico	93
Bréhat Isle	75	Calvi	87	Cette	85
Bremerhaven	67	Calves' Island	123	Ceuta	82, 100

	Page.		Page.		Page.
Ceylon	104	Contis	79	Delaware Bay and R.	125
Chanak Kalehsi	96	Copeland	51	Delle Mele Cape	88
Chanonry Point	46	Copenhagen	59	Dellis Point	100
Chandeleur Id.	123	Coquet Island	43	Demerara	137
Chapman Head	33	Cordouan	78	D'Entrecasteaux Chan.	110
Charles Cape	126	Corfu Island	93	Dejougan, or Tankaria	103
Charleston	129	Corfu	93	Derby Haven	48
Charlotte Town	113	Cork Light Vessel	41	Devil Island	114
Chardakh	96	Cork Harb., or Queens-		Devil's Wharf	123
Chassiron	78	town	50	Dice's Head	118
Château Port	78	Cornfield Pt. Lt. Vessel	123	Dieppe	72
Chatham Harbour	120	Corner Stake	124	Dielette	74
Chausey Islands	74	Correnti Id.	90	Digby, or Annapolis	115
Chauveau Point	78	Corregidor Id.	107	Diursden	62
Cherbourg	73	Corrobodo Cape	81	Djama Ghazaouat	100
Cherrystone Inlet	126	Corsica	87	Dniester River	97
Chesapeake Bay	126	Corse Cape	87	Dog Island	131
Chesapeake Bay and		Corsewall	49	Dog Rocks	99
Rivers	127	Corunna	80, 81	Dolphin Rock	102
Chico Bank Lt. Vessel	140	Costa Rica	140	Dome Ness Lt. Vessel	65
Chiloe Island	140	Coubre Point	79	Dome Ness	65
Chile	140	Coumta	104	Dominica	137
China	107	Courseulles	73	Donaghadee	51
Chipiona	82	Cove Point	127	Dordsche Kil	69
Choctaw Point	132	Covesea Skerries	45	Donarnenez Bay	76
Choctaw Pass	132	Cowcolly, or Kedgeroe	105	Douelan Port	76
Christianso, or Erth-		Crane Island Shoal	126	Double Isle	106
holms	65	Creux Cape	85	Douglas	40
Christiansund	55	Crescent City	141	Dover	34
Christiania Fiord	57	Crinan Canal	47	Dovercourt	41
Christiana River	125	Cromarty Point	43	Dragonera Islet	81
Ciara	139	Cromer	41	Dragör, or Drogden, Lt.	
Cienfuegos	135	Crosby Light Vessel ..	39	Vessel	59
Cies Id.	81	Crosby	37	Drepano Cape	95
Ciotat	86	Croisic Port	77	Drogheda	51
Cisargas Islands	81	Cross Ledge Lt. Vessel	125	Drogden Lt. Vessel	59
Civita Vecchia	89	Crottoy	71	Dry Bank	131
Clare Island	53	Crookhaven	53	Dublin Bay	51
Clark Wharf Spit	39	Cruz Cape	135	Dudgeon Lt. Vessel	42
Clark's Point	121	Cuba	135	Dunbar	44
Clay Island	127	Cudillero	80	Duncannon	50
Clew Bay	53	Cullera Cape	83	Dundee	45
Cloch	48	Cumbræ	48	Dundrum Bay	51
Clopper's Bar	133	Cuttyhunk	121	Dundalk	51
Clyde River	48	Curagoa Island	138	Dungarvan	50
Coatzacoalcos River	138	Cuxhaven	66	Dungeness	34
Cochin	104			Dunkerque	71
Cockspur Island	130	Dædalus Shoal	103	Dunnet Head	46
Cockle Lt. Vessel	41	Dagebüll	66	Dunmore	50
Cod Bay Cape	120	Dager Ort	64	Dumpling Rock	121
Coffin Island	114	Dalnäs	107	Durazzo	93
Cohanzey	125	Dalrymple Port	110	Düsterbrook	61
Colaba Lt. Vessel	103	Dame's Point Lt. Vess.	130	Dutch Island	122
Colaba Point	103	Damietta Mouth	99		
Colombo	104	Danube River	97	Eagle Island	117
Colonia	140	Danzig	65	Eagle Rock	52
Columbretes R.	84	Dars Point	65	Eastbourne	34
Commerce Tower	77	Dartmouth	36	East Indian Islands	106
Concepcion Bay	140	Dartuch	84	Eaton's Neck	123
Conception	141	Davar Island	48	Eckenförde	61
Concarneau	76	Deal Island	109	Ecuador	140
Coneira Island	84	Deer Island	117, 123	Eddystone	36
Connecticut	122	Defteddar Point	97	Edgartown	121
Conquet Port	75	De Grave	79	Eel Grass Lt. Vessel	123
Constantinople	96	De la Hague Cape	74	Eeragh Island	53

	Page.		Page.		Page.
Egerö	56	Fidonisi	97	Gallo Cape	91, 92
Egg Island	125	Fieldo Island	56	Galveston	133
Egg Rock	119	Fig Island	130	Galway Bay	53
Eggreground	62	Filsand Island	65	Gannet Rock	116
Eqina	94	Filtvedt	57	Garden, or Bush Key	131
Edmond-Aan-Zee	58	Finisterre Cape	81	Gardiner's Island	123
Edmont	131	Fire Island	124	Garde, Cape de, ...	99
Egypt	99	Fisherrow	41	Gayhead	121
Eider Lt. Vessel	66	Fishing Battery	127	Gedney's Channel	124
Ekhölm	64	Fiume	93	Geelong	109
Elba Island	88	Fiumicino	89	Geelong Light Vessel	108
El Cabanal	83	Flamboro' Head	42	Geldersche Hook	67
Elephant Point	106	Flatholm	37	Genoa	88
Elgin and Lossiemouth	45	Flat Island	102	Georgetown	129
Eliau, or Lynus	38	Flattery Cape	141	Georgia	130
Elizabeth Cape	118	Fleetwood	39	Gibraltar	82
Elsinore	58	Flinders Cape	108	Giesder Point	50
Ems River	67	Flint Island	114	Gijon	80
English and Welsh Grounds Lt. Vessel	37	Flores	139	Girdleness	45
English Bank Lt. Ves.	140	Florida	130	Girdler Light Vessel	33
Enragé Cape	116	Florida Cape	131	Girgenti	91
Enskar Island	62	Flushing	69	Gitterö	56
Entinas Point	83	Fly, or Green Island	117	Glasgow	48
E. Pascagoula R.	132	Fog Point	127	Glass Island	47
Erekli Point	96	Föhr Island	66	Glenelg Jetty	103
Erthholms	65	Folgeröen	55	Gloppen	54
E-spevar	55	Folkstone	34	Glosholm	63
Espichel Cape	81	Fontane Cape	97	Gloucester Harbour	49
Esquimalt	142	Formby Light Vessel	39	Glückstadt	66
Estaca Cape	80	Formentera Island	84	Goa	103
Étapes, or Canche R.	71	Formenton Cape	84	Goat Island	119, 122
Etel River	76	Formiche	91	Gobernadora	135
Eupatoria	98	Forness	58	Godavery, or Gorde- ware, Point	105
Europa Point	82	Fort Augusta	136	Godrevy	37
Execution Rocks	123	Fort Brescon	85	Goeree	68
Eyemouth	44	Fort Carroll	127	Goedereede, or Goeree	68
		Fort Denison	109	Goeree Island	68
		Fort Midlin	125	Goes	69
Færder	57	Fort Point ... 48, 114,	129	Gorah	103
Fakkebjerg	61	Fort Sumter	129	Golden Bank Lt. Vess.	98
Falaise & Terre Negre	79	Fort St. Jean	86	Goletta	99
Falkland Islands	140	Fort Tompkins	124	Good Hope, Cape of, ..	103
Falmouth	36	Fort Washington	128	Goodwin Light Vessel	361
False Point	105	Foul Point	104	Goose Island	110
Falsterbo Lt. Vessel ..	59	Fourcher Cape	115	Gorleware Pt.	105
Falsterbo	59	Franklin Island	118	Gordon Island	133
Fanar Bay	96	Fraserburgh	45	Gorée Island	101
Fanous Point	96	Fredericia	60	Gorishoek	69
Fano	92	Frederikshavn	59	Gorleston	41
Farallon	141	Frederiksværn	57	Gottland	61
Faraman	85	Frehel Cape	74	Gottska Sandö Island	62
Faro	90	Friedrichsort	61	Goulfur Bay	77
Farö Island	61	Friedrikstadt	63	Gouray	74
Farn Island	43	Frio Cape	139	Gozo Island	92
Fastnet	50	Fryingpan Shoal Lt. V.	129	Grandcamp	73
Father Point	112	Fuenterabia	80	Grand Canary Island	101
Fatouville	73	Fulchuk Island	57	Grand Nouveau Les Ambiez	86
Faulkner Island	123	Fundy, Bay of, ...	45	Grand Ribaud Island ..	86
Favignana Island	91			Grangemouth	44
Fear River, Cape	129	Gadaro	95	Granton	44
Fear Cape	129	Gaeta	89	Granitola Cape	41
Fécamp	72	Guet	79	Granville	74
Federal Point	129	Gulata	46	Gras de Valencia	83
Fenwick Island	125	Gallipoli	96		
Ferro Cape	87	Galloper Light Vessel	33		

	Page.		Page.		Page.
Gravelines	71	Harrington	39	Horsburgh, or Pedra	
Great Bassas Lt. Vessel	104	Hartlepool	42, 43	Branca	106
Great Belt	60	Harwich	41	Horse-shoe Lt. Vessel	129
Great Burin Island ..	111	Hasborough Lt. Vessel	41	Horton	115
Great Captain Island..	123	Hasborough	41	Horton's Point	123
Great Isaac	135	Hastings	34	Hourel Point	71
Great Manan Island ..	116	Hattoras, Cape, ...	128	Hourtin	79
Great West, or Shinne-		Haulbowline Rock	50	Howe, Cape, ...	109
cock, Bay	124	Havana	135	Howth	51
Greenbury Point	127	Havre de Grace	137	Hoylake	39
Green Island 111,	112	Havre	72	Hoy Sound	46
Green Point	102	Hayle	37	Huasca	140
Greenore Point	51	Heath Point	112	Huelva	82
Greenock	48	Héhaux de Bréhat	75	Huenme	141
Greifswald	65	Hellbux Lt. Vessel ..	42	Huertas Cape	83
Gretcheskoi Lt. Vessel	98	Hebrides Islands	47	Humboldt Harbour ..	141
Grimsöar	61	Heg Holm	57	Hunstanton	41
Grindels Point	118	Hekkingen	51	Hunting Island	30
Grindstone Island	115	Hela	65	Hurst Beach	35
Grisnez Cape	71	Heligoland	67	Hvidingsö	56
Grissel Hamm	62	Hellas, Cape, ...	96	Hyannis Harbour	121
Grönsöar Rock	62	Hellesö	55	Hyskere	47
Grouin du Cou Point..	78	Hellevoetsluis	68		
Grozier Islet	137	Helsingör, or Elsinore	58	I Cani, Al Khelb, or	
Grundund Holm	56	Helsingborg	58	Dog Rocks	99
Guadalquivir R.	82	Helwick Light Vessel	37	Iershöft	65
Guadaloupe	137	Hendrick's Head	118	Ile d'Aix	78
Guadiana River	82	Henlopen, Cape, ...	125	Ile de Bas	75
Guanos	135	Henningsvær	54	Ile de Ré	78
Guardiana Rock	94	Henry, Cape, ...	126	Ilfracombe	37
Guayana	137	Heppens	67	Ile de Groix	76
Guayaquil	140	Herne Bay	33	Ile Noire	75
Guernsey	74	Heron Neck	117	Ile de Patiras	79
Guia	81	Hesselö Island	58	Iles Saint Quay	74
Gulf of Bothnia	62	Heyst	70	Ile de Sein	76
Gulf of Mexico	138	Hielm Island	58	Ile D'Oleron	78
Gulf of St. Lawrence..	111	Highlands	120	Ile Vierge	75
Gull Stream Lt. Vessel	34	Highlands of Navesink	124	Ile d'Yeu	77
Gunfleet	33	High Whitby	42	Inchkeith	44
Gun Kay	135	Hillsboro' Bay	43	India	103, 104
Guysboro Harbour	114	Hirtsholm	59	Inisheir	53
		Hobarton	110	Inishgort	53
Half-moon Reef	134	Hoburg Hill	61	Inishowen	52
Halifax	114	Hoc	72	Innistrahul	52
Hallö	58	Hode Point	72	Inverkeithing	44
Haliguen	77	Høedic Island	77	Ionian Sea	93
Hals	59	Hock	67	Ipswich Harbour	119
Halskov	60	Hog Island	125	Iron Rock, or Sgeir	
Hammar Point	65	Hogland	64	Maoile	48
Hammerfest	54	Hogsten	55	Isabel Point	134
Hampton Roads	126	Hohe Weg Flat	67	Ischia Island	89
Hamrah, or Cape de		Høievarde	56	Isle of Man	40
Garde	99	Holburn	46	Isle of May	44
Hancock, Cape	141	Holmes Hole	121	Isle of Pines	135
Hankerchief Lt. Vessel	120	Holmø Gadd	62	Itacolomi	139
Hangö	63	Holyhead	38	It. de la Marine	99
Hanoëaux Rocks	74	Honain, or Djama Gha-		Ithaca Island	94
Hanois, or Hanoëaux		zaouat	99	Iviza Island	84
Rocks	74	Honfleur	73		
Hanover	67	Hoogly River Lt. Vessel	105	Jagua, Xagua, or Cien-	
Hanstholm	66	Hook Tower	50	fuegos	135
Haparanda and Tornea	62	Hooper's Straits Lt. V.	127	Jamaica	136
Harbour Grace	111	Hope Point Fort	33	James River	126
Harbour Id. Lt. Vessel	128	Hormiga Grande	83	Jane Island Lt. Vessel	126
Harlingen	67	Hornby	109	Jardin or Louet Id. ..	75

	Page.		Page.		Page.
Java	106	Kootubdeah Island ..	105	Dittle Belt	60
Jeron Point	97	Korsör	60	Little Curaçoa Island ..	138
Jersey	74	Korsö Islet	62	Little Cumberland Id. ..	130
Jervis Bay	109	Koum Kaleh	96	Little Ferry	46
Jijelli	99	Krab	69	Little Gull Island	123
Jiginsk	54	Kronborg	59	Littlehampton	34
Joliette Port	86	Kronstadt	63	Little Ross	49
Jomfruland	57	Kugel Baak	66	Little River	47
Jones Point	128	Kullen	58	Liverpool	38, 39
Jordan's Point	126	Kurrachee, or Karachi ..	103	Liverpool Bay	114
Jubal Strait	103	Kutali Island	96	Livorno	88
Judith Point	122	Kustenjeh	97	Lizard	36
Jupiter Inlet	131	Kwaden Hoek	68	Llanelly	37
Justias	135	Kykduin	68	Llanes	80
		Kyle Akin	47	Llobregat River	85
Kalbaden-grund Lt. V. ..	63			Lloyd's Harbour	123
Kalian	106	La Chaume	78	Lobos Point	141
Kalk-ground Lt. Ves. ..	64	La Cra'h	77	Loch Eil	47
Kallundborg	60	La Digue	73	Loch Ryan	49
Kamchatka	107	Lady Bay	108	Loc-tudy	76
Kapsali Bay	94	Leso Chan. Lt. Vessel ..	59	Lofoten Islands	64
Kara Burun	97	Lagskar	62	Loggerhead Key	131
Karuchi	103	La Heve	72	Loire River	71
Karakakoa Bay	142	La Hogue	73	London Shoals Lt. Ves. ..	63
Karikai	104	Laka Point	94	Long Island Sound ..	122
Kastro Port	95	Lake Pontchartrain ..	132	Long Island Head	119
Katakolo	94	Lampedusa Island	92	Long Point	120
Katerindal	64	Landguard Fort	41	Long Shoal Lt. Vessel ..	128
Katwijk-aan-Zee	68	Landsort Island	62	Longstone	43
Kawaihoa, C.	142	Langevaad	55	Longships	36
Kay Lobos	135	Langtangen	57	Loophead	53
Kay Sal Bank	135	Lanrice	76	Lookout Cape	128
Kedgerie	105	La Pérotine	78	Lookout Point	127
Kentish Knock Lt. Ves. ..	33	Larne Lough	51	L'Orient	76
Kerjean	75	La Roque	72	L'Orne River	73
Kerprigent	75	Latakiyah	99	Lornel Point	71
Kertch Straits	98	La Teignouse	77	Lossiemouth	45
Key West	131	Latheronwheel	46	Lough Foyle	52
Khandilli Point	97	Lazaretto Point	127	Lough Swilly	52
Khanlijeh	97	Leasowe	39	Louisburg	114
Kheppez, or Barber's Point	96	Leeröen Island	55	Lower Cedar Pt. Lt. V. ..	128
Khersonese	98	Lee Scar	40	Lowestoft	41
Khoraz Point	96	Leervig	55	Lucrezia	126
Kilcradan	53	Lefevre's Peninsula ..	108	Lühe Light Vessel	67
Kilid Bahr	96	Lefkimo Lt. Vessel ..	93	Lundy Island	37
Kili Cape	98	Le Four	77	Lune River	39
Killingholm	42	Leghorn, or Livorno ..	88	Lunenburg Bay	114
Killybegs	52	Légue Port	74	Lyme Regis	35
Kinburn Light Vessel ..	97	Le Heve Cape	114	Lynn Well Lt. Vessel ..	42
King Island	108	Leith	44	Lynus, or Elian Point ..	38
King George Sound ..	107	Leman & Ower Lt. Ves. ..	41	Lyster Ort	65
Kingstown	51	Lepreau	46	Lytham	39
Kinnaird Head	45	Lepso Reef Lt. Vessel ..	55		
Kinsale	50	Levant, or Titan Id. ..	86	Maas River	69
Kiöge	59	Levanzo	91	Macduff	45
Kirkcaldy	44	Levi Cape	73	Maceio	139
Kirkwall	46	Lewis, Butt of, ...	47	Machias Islands	116
Kish Lt. Vessel	51	Libby Island	117	Machichaco Cape	80
Kjæøen, or Kie Island ..	54	Little Feisteen	56	Madras	104
Kloppen, or Gløppen ..	34	Lime Rock	122	Magdalen Islands	111
Knuds Head	60	Limon, or Navy Bay, ..	138	Magnisi	90
Kobbergrund Lt. Ves. ..	59	Lindsmæs	56	Mahon River	125
Kokkär	64	Lipso Island	95	Maidens	51
Koon Bunder	103	Lismore	47	Maine, Coast of, ..	117, 118
		Lister	56	Majorca Island	84

Page.		Page.		Page.	
Malacca	106	Middelharnis	68	Nagara Point	96
Malacca Strait Lt. Ves.	106	Midtholmen	55	Nakke Head	53
Malaga	83	Milazzo	91	Nantucket	120
Malaguash, or Lunenburg Bay	114	Mindine Tower	77	Nantouar	75
Malamocco	93	Minehead	50	Naples, Bay of, ...	90
Malandar Point	82	Minots Ledge	119	Naples	90
Maldonado Bay	139	Minorea Island	84	Nargen	64
Malmo	59	Minou Point	76	Narragansett Bay	112
Malta Island	92	Mintok	106	Narraguagus	117
Mamone	91	Miramichi Bay	113	Narva	63
Mandavee	103	Miscou Island	113	Nash Point	37
Mangalore	104	Miseno Cape	89	Nashes Island	117
Manheigin Island	118	Mississippi Sound	152	Naskubben Rock	62
Manila	107	Mississippi & Louisiana	132	Nassau Harbour	135
Maplin	33	Mississippi, Mouths of, ...	132	Nauset Beach	120
Mapon Light Vessel ..	79	Missolonghi	94	Navalo Port	77
Maranham	139	Mityleni Island	95	Navy Bay	138
Marblehead Harbour ..	119	Mobile Bay	132	Nayat Point	122
Maretime Island	91	Mobile Point	132	Naze of Norway, or	
Margarie Island	114	Moen Island	59	Lindesnæs	56
Margaretville	115	Mola	92	N. Dumping Island ..	122
Margate	33	Molfetta	92	Ned's Point	121
Marien	61	Monach or Hiskere ..	47	Needles Outer Rock ..	35
Marken Island	67	Mondego Cape	81	Negapatam	104
Marmora Island	96	Monemvasia Cape	94	Negro Island	118
Marocco	82, 100	Monrovia	101	Negropont Canal	95
Marsa Musceit	92	Monomoy Point	120	Nelson	110
Marsa Sirocco	92	Monterey	141	Neuse R. Lt. Vessel ..	128
Marsala	91	Monte Circello	89	Neustadt	61
Marseille	86	Montrose	45	Neuwerk	66
Marshall's Point	118	Montauk Point	124	Neva Light Vessel	63
Marshall Cove, or Port Williams	115	Mont Agde	85	New Archangel	142
Marstrand	58	Montserrat	136	Newark Bay	124
Martinique	137	Monte Rosello	91	Newarp Light Vessel ..	41
Maryland	126	Monte Video	140	New Brunswick	113
Maryport	40	Monopoli	92	Newbury Port	119
Massachusetts	119	Moose Peak	117	Newcastle, or Port Hunter	109
Matulipatam	105	Morant Point	136	New Dungeness	141
Matagorda	134	Moreton Bay	109	Newfoundland	111
Matinicus Rock	118	Morgan Point	122	Newhaven	34, 44
Maurice River	125	Morjovets	54	Newhaven Harbour ..	123
Mauritius Island	102	Morlaix	75	New Hampshire	119
Maurizio Point	88	Morris Island	129	New Jersey	124, 125
May Cape	125	Morro de S. Paolo ..	139	New London	122
May, Island of	44	Morsaline	73	New Point Comfort ..	126
Mayo's Beach	120	Morup Tänge Point ..	58	Newport	45
Mayor Cape	80	Moss Havn	57	New York	124
Maysi Cape	136	Mostaghanem	99	New York Bay	124
Medway Head	114	Moudinga	54	New Zealand	110
Meelough Spit	50	Mouillé Point	102	N. Hellig Vær	54
Megalo Kastron	95	Moule de Port	137	Nice	86
Melbourne Lt. Vessel ..	109	Mount Desert	117	Nicoya Gulf	140
Melilla	100	Mouro Island	80	Nidingen Rock	58
Memel	65	Mount Laksberg	64	Nieuwe Diep	68
Menai	38	Mouse Light Vessel ..	33	Nile River	99
M. ndocino Cape	141	Mucking Flat	33	Nisita Island	90
Merrill Shell Bk.	132	Mull of Cantyre	48	Nieuport	70
Messina	90	Mull of Galloway	49	Nobsque Point	121
Metway, or Medway Head	114	Mull, Sound of, ...	47	Noordwijk-aan-Zee ..	68
Mexico	140	Mumbles	37	Nore Light Vessel	33
Middleburg	69	Munk Holm	50	North Carolina	123
Middlefort	60	Murro di Porco	90	Northfleet	33
		Muron Islet	137	North Foreland	34
		Mutlah River Lt. Ves.	105	North Hinder Lt. Ves.	70
		Mutton Island	53		

	Page.		Page.		Page.
North Point	127	Palmas Cape	101	Pilot Ridge Lt. Vessel	105
Norr-Skaren	62	Palmajola Id.	88	Pine Cape	111
Northumberland Cape	108	Palmer's Island	121	Piney Point	127
North Unst	47	Palos Cape	83	Piræus of Athens	94
Norwalk Island	123	Palumbo Rock	91	Piskieri Cape	96
Noss Head	46	Pamlico Point.....	128	Pittenween	44
Nova Scotia.....	113, 114	Pamlico Sound	128	Pladda	48
Nuevitas Harbour	136	Pancha Island.....	80	Plans, or Tabarca Id.	83
Nyborg	60	Para	139	Planier Rock	86
		Paredone Grande ...	136	Pleasantons Island	132
Oak Island	129	Parsborough	115	Ploumanac'h Port	75
Oban	47	Partridge Island.....	116	Plum Island	123
Ocracoke Island	128	Passages Port	80	Plum Point	136
Odderö	56	Passaic River	124	Plymouth	36, 120
Odessa	97	Pass à L'outré	132	Poge Cape	121
Odet River	76	Pass Christian	132	Point of Ayr	40
Odier River	82	Passero Island.....	90	Point l'Eve	77
Offer Wadham Island	111	Pass Manchac	133	Point de Galle	104
Oland Island	61	Patagonia	140	Point de Monts	112
Old Field Point	123	Patapsco River	127	Pointe à Pitre	137
Old Point Comfort.....	126	Patras	94	Point of Rocks	121
Onechew Island	142	Pauillac	79	Pointe de Ver	73
Oneglia Port	88	Paull	42	Pola	93
Ooltgensplaat	69	Pavoa de Varzim	81	Pollock Rip Lt. Vessel	120
Oostvoorne	68	Paxo Island	94	Pond Island	118
Oporto	81	Pedra Branca	106	Pondicherry	104
Oran	99	Peel	40	Pontailac	79
Oranienbaum	63	Pelée Island	73	Ponza Island	89
Orfordness	41	Pembrey Harbour ...	38	Poolbeg	51
Orinoco River Lt. Ves.	138	Penas Cape	80	Poole Island	127
Orlov	54	Penfret	76	Poole	35
Oropesa Cape	84	Penlan Point	77	Poplar Point	122
Oronsay Island	47	Penmarc'h Point	76	Pornic Port	77
Orrio de Tapia Island	80	Penmaquid Point	118	Porquorolles Island ..	86
Örskär Island	62	Pennoscot Bay	117, 118	Port Adelaide Lt. Ves.	103
Ortiz Bank Lt. Vessel	140	Pensacola	131	Port Albert	109
Orton's Point	129	Pentland Skerries ...	46	Port Argostoli	94
Orkney Islands	46	Penzance	36	Port-en-Bessin	73
Ossenhoek	68	Pera Cape	84	Port-on-Craig	45
Östergarn Island	61	Perim Island	103	Port de la Flotte	78
Ostende	70	Pernambuco	139	Port d'Isigny	73
Ostra Finngrund Lt. V.	62	Pernau	64	Port Elizabeth	102
Otago	110	Perros Bay	75	Port Ellen	48
Otway Cape	108	Pertuis Breton	78	Port Ercole	88
Ouessant, or Ushant ..	75	Pertusato Cape	87	Port Fairy	108
Outö or Utö	63	Peru	140	Port Ferrajo	86
Owers Lt. Vessel	35	Pesaro	92	Port Gayo	94
Owhyhee	142	Pescadores	107	Port Glasgow	48
Owl's Head	118	Peterhof	63	Pt. Haut-banc of Berck	71
Oxhammer	55	Peter Island	115	Port Hood	113
Oxö Island	56	Peterhead	45	Port Hunter	109
Oyster Beds	130	Petit Manan	117	Port Jackson	109
Oyster Island	52	Petite Terre	137	Port la Calle	99
		Petrouchina Lt. Vessel	98	Port Latour	115
Paarde Markt Lt. Ves.	70	Philippine Islands ...	107	Port Longone	88
Pacific Ocean Is.	142	Phladda Island	47	Port Mahon	84
Padra Island	134	Pianosa Island	89	Port Nettuno	89
Paimboeuf Port	77	Piave Vecchia	93	Port Nicholson	110
Pakefield	47	Pictou Harbour	113	Port Nouvelle	85
Paker Ort	64	Pictou Island	113	Port Patrick	49
Palais Port	77	Pierre à l'Éclil	77	Port Pi	84
Palermo	91	Pigeon House	75	Port Philip	108, 109
Palto Point	96	Piir Holm	55	Port Pontchartrain ..	132
Palk Bay	104	Pillier Island	77	Port Rossa, or Rousse	87
Palma Port	84	Pillau	65	Port Said	99

	Page.		Page.		Page.
Port Santa Cruz.....	136	Red Castle	52	Rugged Island Harb.	116
Port Torres	87	Red Fish Bar	133	Runö	64
Port Vendres	86	Red Islet Bank	112	Ryde	35
Port Williams	115	Red Sea	103	Rye	34
Portbail	74	Reedy Island	126	Ryvarlen.....	66
Portland Bay	108	Reef Ness	60		
Portland	35	Beggio	91	Sabine Pass.....	133
Portland Harbour	118	Régneville	74	Sables d'Olonne	78
Portland, or Casco Bay	118	Reuskar	63	Saddleback Ledge	117
Porto di Lido	93	Réunion, or Bourbon Id.	102	Saire Point	73
Porto Fino	88	Revel, or Katerindal ..	64	Salmedina Rocks	82
Porto Vecchio.....	87	Revelstein Lt. Vessel..	64	Salou	85
Porto Venere	88	Reyes	141	Saltcoats	49
Portrioux	75	Rhithymna, or Rith-		Saltees Light Vessel ..	50
Portsmouth	49	ymno	95	Salvatore Fort	90
Portugal	81	Rhode Island	122	Salvora Island	81
Portzie Point	76	Rhodes	95	Sambro Island	114
Potomac River	127	Rhu Val Sound	48	Samsoe Island	60
Poulton Pier	39	Rhynns of Islay	48	San Angelo Point	89
Præstö	54	Richard	79	San Antonio	135
Pratas Shoal	107	Ribble River	39	San Antonio Cape	83
Price's Creek	129	Richmond Bay	113	Sanda Island	48
Princes Bay	124	Riga	64	San Diego	140
Princes Chann. Lt. Ves.	33	Rigolets	132	Sand Island.....	132
Prince Edward Island.	113	Rimino	92	Sand Key	131
Princess Royal Harb.	107	Rio de Janeiro	139	Sandridge	109
Prior Cape	80	Rio de la Hacha.....	138	Sandy Hook	124
Priorino Cape	80	Rio Grande	134, 139	Sandy Neck	120
Procida Island	89	Rio Grande do Norte..	139	Sandy Point	127
Proctorsville	132	Rio de Plata	139, 140	Sands Point.....	124
Promontore Cape	93	Rivadesella	80	Sandwich Islands	142
Prudence Island.....	122	River Elbe	66	San Francisco.....	141
Pubnico Harbour	115	River Gironde.....	78, 79	San Julian	81
Puerto Cabello	138	River Humber	42	Sankaty Head.....	120
Puerto Rico	136	River Seins	72	San Pedro	141
Pulo Dahan Lt. Vessel	10	River Thames	33	San Ranieri	90
Pultenas Town	46	Rixhöft	65	San Salvador, or Bahia	139
Pulicat.....	104	Roanoke Island	125	San Sebastian Cape ..	85
Pumpkin Island	117	Robben Island	102	San Sebastian	80
Puteolano, or Puzzuoli	89	Robbins Reef	124	Santa Barbara	141
		Roca Cape	81	Santa Croce Cape	90
Quao	116	Rochelle Harbour	78	Santa Cruz	101
Queenstown	50	Roche Point	50	Santa Cruz Harbour ..	141
Querqueville Fort	74	Roche Bonne Lt. Vessel	78	Santa Cruz, or St. Croix	
Quiberon Bay	71	Rockabill	51	Island	136
Quilleboef	72	Röd Point	57	Santa Maria Cape	82
Qvitholm	55	Rödsjär	64	Santa Maura	94
		Romain Cape	129	Santander	80
Race Cape	111	Roman Rock	102	Sant' Anna	139
Race Island	142	Romblon Island	107	Santipilly	105
Race Point	120	Ronaldaha	46	Santa Pola	83
Raffles	106	Rondö	55	Santo Domingo	136
Rakof	107	Rönne	65	Santona	80
Ramsey	40	Rosetta Mouth	99	Santos	139
Ramsgate	34	Rosso Porto	93	Sapelo Island	130
Rangoon	106	Rotten Island	52	Sardinia	87
Rathlin	61	Rottneet Island	107	Särhoug	56
Rathlin-o-Birne	62	Roumili	97	Saugor Island.....	105
Rattlesnake Shoals Lt.		Roumili Hissar	97	Saundersfoot	38
Vessel	129	Round Island 104, 117,	132	Sauzon Port	77
Ravenna	93	Rousse Island	87	Savannah River	130
Raza	139	Rovigno	93	Savona Port	88
Razzoli Island.....	87	Royal Shoal.....	128	Saybrook Point	123
Récife Cape	102	Royan	79	Sazalnitzk Light Vessel	98
Récif Lavazzi, Boll Bt.	87	Rozier Cape.....	112	S. Beveland Island ..	69

	Page.		Page.		Page.
S. Bishop Rock	38	Sitka	142	St. Andrew's	44
Scarmina, or Secca Pt.	91	Sjaaholmen	54	St. Andrew, Port	116
Scarborough	42	Skællanger	55	St. Ann's Point	38
Scatari Island	114	Skagen, or Scaw....	59, 66	St. Augustine	131
Schank Cape	109	Skelligs	53	St. Bees Head	39
Scheveningen	68	Skerries	38	St. Blas, Cape	131
Schiermonnikoog	68	Skerryvore	47	St. Cataldo	92
Schokland Island	67	Skinburness	40	St. Catherine's	35
Schouwen	69	Skude Ness	56	St. Catherine Tower,	
Schouwen Island	68	Skutari	96	Gaeta	89
Schulan Light Vessel ..	67	Sligo	52	St. Christopher	136
Scilly	36	Slipshavn	60	St. Croix, Island	136
Scituato	120	Sloe	69	St. Denis	102
Scrigina Island	99	Slotterö	55	St. Elias, Cape	87
Sea of Azof	98	Slyne Head	53	St. George, Cape	131
Sea of Marmora	96	Smalls	38	St. George	79
Seaham	43	Smith Point Lt. Vessel	127	St. Gilles-sur-Vie	78
Seal Island	115	Smith, or Blunt Island	142	St. Helier	74
Seaton	42	Smyrna	95	St. Iago de Cuba	135
Sea Wolf, or Margarie		Society Islands	142	St. Ives	37
Island	114	Sococa Port	79	St. John's Harbour ..	116
Sebastopol	98	Söderarm	62	St. John's Point	52
Secca Point	91	Soller Port	84	St. John's	111
Seddul Bahr	96	Solway Light Vessel ..	40	St. John's River	130
Seguin Island	118	Sombrero	136	St. Joseph's Island ..	132
Seine, River, ...	72	Sommars	63	St. Lawrence, River ..	112
Seirö	60	Somme River	71	St. Louis	102
Selbø Fiord	55	Sottile, or Mamone ..	91	St. Lucia	137
Senegal	101	Sound, The	59	St. Malo	74
Sénéquet	74	Sound of Mull	47	St. Marcouf	73
Sevet Cape	86	Sourop	64	St. Maria Tower	89
Sept Iles	75	Southampton	35	St. Mark's	131
Seskär	63	South Carolina	129	St. Martin, Port	78
Setuval, or St. Ubes ..	82	Southend	33	St. Mary, Cape	111
Seven Foot Knoll	127	Southernness	49	St. Mary, Port	40
Sev. Stones Lt. Vessel ..	36	South Foreland	34	St. Mathieu	76
Shablah Cape	97	South Point	137	St. Michael	101
Shambles Shoal Lt. V. ..	35	Southsea Castle	35	St. Monan	44
Shannon River	53	South Rock	51	St. Nazaire	77
Shannon	103	South Rona	47	St. Nicholas Gat Lt. V.	41
Shantau	107	South Sand Hd. Lt. V. ..	34	St. Nicholas Island ..	77
Sharp Island	127	South Shoal Lt. Vessel	120	St. Paul Island	111
S. Head	109	South Stack Rock	38	St. Petersburg	63
Shediac	113	South Traverse Lt. Ves.	112	St. Pierre Island	111
Sheerness	33	South-west Pass	133	St. Simon Island	130
Shelburne	115	Sow & Pigs Shoal Lt. V.	109	St. Thomas	136
Shell Keys	133	Spathi Cape	94	St. Tropez	86
Shelbrook Tower	114	Spear Cape	111	St. Ubes	82
Shershell	99	Spezia Bay	83	St. Valery-en-Caux ..	72
Shetland Islands ..	46, 47	Spezia Island	94	St. Venere	91
Shinnecock Bay	124	Spit Bank	50	St. Vincent, Cape	82
Ship Island	132	Spoon Island	117	St. Vincent	137
Ship Island Shoal	133	Spotsbiorg	55	St. Vincent, Gulf	108
Shipwash Lt. Vessel	41	Spurn Point	42	St. Vito, Cape	91
Shoreham	34	Spurn Light Vessel	42	Steenen Baak	68
Shortland Bluff	108	Sprogö	60	Steilene Island	57
Shovelful Light Vessel	120	Stallingborough Ferry	42	Stephano Burun	96
Sicily	90	Stamphani Island	94	Stevns Cape	69
Sierra Leone	101	Stamsund	54	Stingray Point	126
Sigri Cape	95	Stanford Light Vessel ..	41	Stonehaven	45
Siluria	134	Stangholms Island	57	Stone Pillar	112
Simon's Bay	102	Start Point	36, 46	Stonington	122
Singapore	106	Stavenisse	69	Stora Gulf	99
Sinigaglia	92	Stavoren	67	Stor Jungfrun	62
Sisal	138	St. Abb's Head	44	Storens	66

	Page.		Page.		Page.
Stornoway	47	Tenedos Island	95	Turkey Point	127
Straitmouth Harbour	119	Tenerife	101	Turks Island	135
Stratford Point	123	Tenez	99	Turneff Kays	138
Stratford Pt. Lt. Ves.	123	Ten Pound Island	119	Tuskar	50
Strijen-Sas	69	Terminos de Laguna	138	Tuticorin	104
Strivali Islands	94	Ter Neuse, Axel Island	69	Tybee Island	139
Start	108	Terningen	54	Tybee Knoll Lt. Vessel	130
Succunneset Shoal Lt. Vessel	120	Terracina	89	Tynemouth	43
Suda Island	95	Terribles	105	Udsire	56
Suez Light Vessel	103	Terschelling	68	Ulklippor Rocks	61
Sullivan	129	Testa Cape	87	Umea	62
Sumburgh Head	46	Tete de More	86	Umpqua River	141
Sunderland	43	Texas	133	Umur Banks Lt. Vessel	97
Sunk Light Vessel	33	Themistocles, Cape	94	Understen Rock	62
Surinam Light Vessel	137	Therapia	97	Upper Cedar Pt. Lt. V.	128
Susquehanna River	127	Tholen Island	69	Upper Jetty range	129
Suzac	79	Thomas Point	127	Urk Island	67
Svartklub Rock	62	Throgg's Neck	124	Ushant	75
Svendborg	60	Thunö	60	Usk River	37
Svinö	54	Tierra Firme	138	Ustrenish	47
Swalfer Ort	65	Tignoso	93	Utö	63
Swanage	35	Timballier Bay	133	Vaag, or N. Hellig Vær	54
Swan Island	110	Tinoso Cape	83	Vado Port	88
Swan River	107	Titan Island	86	Væirö	60
Swan Spit	108	Tobago	137	Valentia	53
Swansea	37	Tober Ali	106	Valetta	92
Swatow, or Shantau	107	Tolboukin	63	Valparaiso	140
Sweden	58	Tongue Light Vessel	33	Vancouver Island	142
Swin Middle Lt. Ves.	33	Tophana	97	Van Diemen's Land	110
Swinemünde	65	Torgauten Island	57	Varnäs	56
S.W. Reef	133	Torgersö Island	57	Varne Light Vessel	34
Sydney	114	Tornea	62	Veere	69
Sylt	66	Torquay	36	Venice	93
Syra	95	Tortosa Cape	85	Vera Cruz	138
Syracusa	90	Tortugas, Dry	131	Verclut Breakwater	74
Taars	60	Torungen	57	Vibberodden	56
Tabarca Island	83	Tory Island	52	Vigo	81
Table Bay	102	Toulinguet Point	76	Villa	54
Taetan Island	107	Toulon Road	86	Villa Franca Point	86
Tagus, River	81	Tour de By Lt. Vessel	79	Villa-joyosa	83
Tahiti	142	Tour la Lande	75	Villanos Cape	81
Takli	98	Touques River	73	Vineyard Sound	121
Tallais Bank Lt. Vessel	79	Toward	48	Vinga Island	58
Tampico	138	Trafalgar, Cape	82	Virginia	125
Tancarville	72	Tralee	53	Vlieland	68
Tankaria	103	Trapani	91	Voorne Island	68
Taptee	103	Travemünde	65	Vulcano Island	91
Taranto	91	Trebizond	98	Wade Point	128
Tarbet Ness	46	Tréguier River	75	Walcheren Island	69
Tarbut	53	Treport	71	Walde Point	71
Tarifa	82	Trepose Head	37	Walderhoug	55
Tarkan Cape	98	Trieste	93	Wales	38
Tarpaulin Cove	121	Trincomalee	104	Walney Island	37
Tarragona	85	Trindelen Lt. Vessel	59	Wangeroog	67
Tasmania	110	Trinidad	137	Warkworth	43
Tay River	45	Trompeloup	79	Warnemünde	65
Tchefuncta River	133	Trondhjem	55	Warner Light Vessel	35
Tees Bay	112	Troon	49	Warmambool, or Lady Bay	108
Teignmouth	36	Troubridge Shoal	108	Warwick	122
Tellicherry	104	Tucacas	138	Watch Hill	122
Tenant Harbour	118	Tuckanuck Shoal Lt. Vessel	121	Waterford	50
Tenby	38	Tunge Ness	56		
Tendra Island	98	Tunis	99		
		Ture	52		

	Page.		Page.		Page.
Watts Island	126	Wieringen	67	Yang-tse-Kiang Lt. V.	107
Weeser Light Vessel ..	67	Wigwam Point	119	Yarmouth Castle	35
Weeser River	67	Willemstad	69	Yarmouth, or Cape	
West Australia	107	Williamstown.....	109	Fourchu	115
West Cappel	69	Willoughby Spit Lt. V.	126	Yarmouth, or Gorleston	41
Western Islands.....	101	Wilson Promon.....	109	Yelaguin Light Vessel	63
West Quoddy Head ..	117	Windmill Pt. Lt. Vess.	126	Yeni Kaleh	98
Weymouth	35	Winga, or Vinga Id. .	58	Yeni Keui Lt. Vessel..	97
Whale's Back	119	Wing's Neck	121	York Spit Light Vessel	126
Whalsey Skerries	47	Winter Harbour	117	Youghal	50
Whidbey Island.....	142	Winterton Ness	41	Ystad	61
Whitby	42	Wolftrap Shoals Lt. V.	126		
White Castle	52	Wolf Island	130	Zafarina Point	103
Whitehaven	39	Wolf Rock	36	Zandvoort	68
White Head Island, 114, 118		Wood Island	118	Zante Island	94
White Island	119	Workington	39	Zea	95
White Sea	54	Wrath Cape	47	Zebu Port	107
White Shoal	126	Wyre River	39	Zierikzee	69
Wick, or Pulteney Town	46			Zijpe.....	69
Wicklow	50	Xagua	135	Zuider Zee	67
Widow Island.....	117				

	Page.		Page.		Page.
S. Bishop Rock	38	Sitka	142	St. Andrew's	44
Scarmina, or Secca Pt.	91	Sjaaholmen	54	St. Andrew, Port	116
Scarborough	42	Skællanger	55	St. Ann's Point	38
Scatari Island	114	Skagen, or Scaw	59, 66	St. Augustine	131
Schank Cape	109	Skellings	53	St. Bees Head	39
Scheveningen	68	Skerries	38	St. Blas, Cape	131
Schiermonnikoog	68	Skerryvore	47	St. Cataldo	92
Schokland Island	67	Skinburness	40	St. Catherine's	35
Schouwen	69	Skude Ness	56	St. Catherine Tower,	
Schouwen Island	68	Skutari	96	Gaeta	89
Schulan Light Vessel	67	Sligo	52	St. Christopher	136
Scilly	36	Slipshavn	60	St. Croix, Island	136
Scituate	120	Sloe	69	St. Denis	102
Scrigina Island	99	Slotterø	55	St. Elias, Cape	87
Sea of Azof	98	Slyne-Head	53	St. George, Cape	131
Sea of Marmora	96	Smalls	38	St. George	79
Seaham	43	Smith Point Lt. Vessel	127	St. Gilles-sur-Vie	78
Seal Island	115	Smith, or Blunt Island	142	St. Helier	74
Seaton	42	Smyrna	95	St. Iago de Cuba	135
Sea Wolf, or Margarie		Society Islands	142	St. Ives	37
Island	114	Socca Port	79	St. John's Harbour	116
Sebastopol	98	Söderarm	62	St. John's Point	52
Secca Point	91	Soller Port	84	St. John's	111
Seddul Bahr	96	Solway Light Vessel	40	St. John's River	130
Seguin Island	118	Sombrero	136	St. Joseph's Island	132
Seine, River, ...	72	Sommars	63	St. Lawrence, River	112
Seirø	60	Somme River	71	St. Louis	102
Selbø Fiord	55	Sottile, or Mamone	91	St. Lucia	137
Senegal	101	Sound, The	59	St. Malo	74
Sénéquet	74	Sound of Mull	47	St. Marcouf	73
Sevet Cape	86	Sourop	64	St. Maria Tower	89
Sept Iles	75	Southampton	35	St. Mark's	131
Seskär	63	South Carolina	129	St. Martin, Port	78
Setuval, or St. Ubes	82	Southend	33	St. Mary, Cape	111
Seven Foot Knoll	127	Southernness	49	St. Mary, Port	40
Sev. Stones Lt. Vessel	36	South Foreland	34	St. Mathieu	76
Shablah Cape	97	South Point	137	St. Michael	101
Shambles Shoal Lt. V.	35	Southsea Castle	35	St. Monan	44
Shannon River	53	South Rock	51	St. Nazaire	77
Shannon	103	South Rona	47	St. Nicholas Gat Lt. V.	41
Shantau	107	South Sand Hd. Lt. V.	34	St. Nicholas Island	77
Sharp Island	127	South Shoal Lt. Vessel	120	St. Paul Island	111
S. Head	109	South Stack Rock	38	St. Petersburg	63
Shediac	113	South Traverse Lt. Ves.	112	St. Pierre Island	111
Sheerness	33	South-west Pass	133	St. Simon Island	130
Shelburne	115	Sow & Pigs Shoal Lt. V.	109	St. Thomas	136
Shell Keys	133	Spathi Cape	94	St. Tropez	86
Sherbrook Tower	114	Spear Cape	111	St. Ubes	82
Shershell	99	Spezia Bay	83	St. Valery-en-Caux	72
Shetland Islands	46, 47	Spezia Island	94	St. Venere	91
Shinnecock Bay	124	Spit Bank	50	St. Vincent, Cape	82
Ship Island	132	Spoon Island	117	St. Vincent	137
Ship Island Shoal	133	Spotsbiorg	55	St. Vincent, Gulf	108
Shipwash Lt. Vessel	41	Spurn Point	42	St. Vito, Cape	91
Shoreham	34	Spurn Light Vessel	42	Steenen Baak	68
Shortland Bluff	108	Sprogö	60	Steilene Island	57
Shovelful Light Vessel	120	Stallingborough Ferry	42	Stephano Burun	96
Sicily	90	Stamphani Island	94	Stevns Cape	59
Sierra Leone	101	Stamsund	54	Stingray Point	126
Sigri Cape	95	Stanford Light Vessel	41	Stonehaven	45
Siluria	134	Stangholms Island	57	Stone Pillar	112
Simon's Bay	102	Start Point	36, 46	Stonington	122
Singapore	106	Stavenisse	69	Stora Gulf	99
Sinigaglia	92	Stavoren	67	Stor Jungfrun	62
Sisal	138	St. Abb's Head	44	Storens	66

	Page.		Page.		Page.
Watts Island	126	Wieringen	67	Yang-tse-Kiang Lt. V.	107
Weser Light Vessel ..	67	Wigwam Point	119	Yarmouth Castle	35
Weser River	67	Willemstad	69	Yarmouth, or Cape	
West Australia	107	Williamstown	109	Fourchu	115
West Cappel	69	Willoughby Spit Lt. V.	126	Yarmouth, or Gorleston	41
Western Islands	101	Wilson Promon.	109	Yelaguin Light Vessel	63
West Quoddy Head ..	117	Windmill Pt. Lt. Vess.	126	Yeni Kaleh	98
Weymouth	35	Winga, or Vinga Id. ...	58	Yeni Keui Lt. Vessel..	97
Whale's Back	119	Wing's Neck	121	York Spit Light Vessel	126
Whalsey Skerries	47	Winter Harbour	117	Youghal	50
Whidbey Island	142	Winterton Ness	41	Ystad	61
Whitby	42	Wolftrap Shoals Lt. V.	126		
White Castle	52	Wolf Island	130	Zafarina Point	103
Whitehaven	39	Wolf Rock	36	Zandvoort	68
White Head Island, 114, 118		Wood Island	118	Zante Island	94
White Island	119	Workington	39	Zea	95
White Sea	54	Wrath Cape	47	Zebu Port	107
White Shoal	126	Wyre River	39	Zierikzee	69
Wick, or Pulteney Town	46			Zijpe	69
Wicklow	50	Xagua	135	Zuider Zee	67
Widow Island	117				

